

DVP-S335/S336/S345/ S535D/S735D

RMT-D115E/D115P/D116P/D120E/D1200/D120P

SERVICE MANUAL

Self Diagnosis
Supported model



Photo: DVP-S335

AEP Model
UK Model

DVP-S335/S336/S535D/S735D

Russian Model
Saudi Arabia Model

DVP-S335/S735D

E Model

DVP-S335/S345/S735D

Australian Model

DVP-S336/S735D

SPECIFICATIONS

CD/DVD player

Laser Semiconductor laser

Signal format system

PAL/(NTSC)

Audio characteristics

Frequency response

DVD (PCM 96 kHz): 2 Hz to 44 kHz
(± 1 dB)*

DVD (PCM 48 kHz): 2 Hz to 22 kHz
(± 0.5 dB)

CD: 2 Hz to 20 kHz (± 0.5 dB)

Signal-to-noise ratio

More than 110 dB (AUDIO OUT connectors
only) (EXCEPT S735D: E, EA, AUS)

More than 115 dB (AUDIO OUT connectors
only) (S735D: E, EA, AUS)

Harmonic distortion

Less than 0.003 % (EXCEPT S735D)

Less than 0.0025 % (S735D)

Dynamic range

More than 100 dB (DVD)

More than 97 dB (CD) (EXCEPT S735D)

More than 98 dB (CD) (S735D)

Wow and flutter

Less than detected value
(± 0.001 % W PEAK)

Outputs

	Jack type	Output level	Load impedance
AUDIO OUT	Phono jacks	2 Vrms (at 50 kilohms)	Over 10 kilohms
DIGITAL OUT (OPTICAL)	Optical output connector	-18 dBm	Wave length: 660 nm
DIGITAL OUT (COAXIAL)	Phono jack	0.5 Vp-p	75 ohms terminated
VIDEO OUT	Phono jacks	1.0 Vp-p	75 ohms, sync negative
S VIDEO OUT	4-pin mini DIN	Y: 1.0 Vp-p C: 0.3 Vp-p (PAL) C: 0.286 Vp-p (NTSC)	75 ohms, sync negative 75 ohms terminated
5.1CH OUTPUT (S535D/S735D)	Phono jack	2 Vrms (at 50 kilohms)	Over 10 kilohms
PHONES (S535D/S735D)	Phone jack	12 mW	32 ohms
COMPONENT VIDEO OUT (Y, Cb/B-Y, Cr/R-Y) (S335: E, EA/S336: AUS/S345/S735D)	Phono jacks	Y: 1.0 Vp-p Cb/B-Y Cr/R-Y 0.7 Vp-p	75 ohms, sync negative 75 ohms
AUDIO OUT (WOOFER) (S335/S336/S345)	Phono jack	2 Vrms (at 50 kilohms)	Over 10 kilohms

– Continued on next page –



CD/DVD PLAYER

SONY®



General

Power requirements

220 – 240 V AC, 50/60 Hz

Power consumption

15 W (S335/S336/S345)

16 W (S735D: E, EA, AUS)

17 W (S535D/S735D: AEP, UK, RU)

Dimensions (approx.)

430 × 69 × 252 mm (17 × 2³/₄ × 10 in.)

(S335/S336/S345)

430 × 69 × 260 mm (17 × 2³/₄ × 10¹/₄ in.) (S535D)

430 × 74 × 260 mm (17 × 3 × 10¹/₄ in.) (S735D)

(w/h/d) incl. projecting parts

Mass (approx.)

2.8 kg (6 lb 3 oz) (S335/S336/S345)

2.9 kg (6 lb 6 oz) (S535D)

3.1 kg (6 lb 13 oz) (S735D)

Operating temperature

5 °C to 35 °C

Operating humidity

25 % to 80 %

Supplied accessories

- Audio/video connecting cord (1)
- Remote commander (remote) (1)
- R6 (size AA) batteries (2)
- S video cord (1) (S535D/S735D)

* The signals from AUDIO OUT connectors are measured. When you play PCM sound tracks with a 96 kHz sampling frequency, the output signals from the DIGITAL OUT (OPTICAL, COAXIAL) are converted to 48 kHz (sampling frequency).
(S335/S336/S345)

Design and specifications are subject to change without notice.

WARNING!!




WHEN SERVICING, DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION, BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 25 cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICK-UP BLOCK.

CAUTION:

The use of optical instrument with this product will increase eye hazard.

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

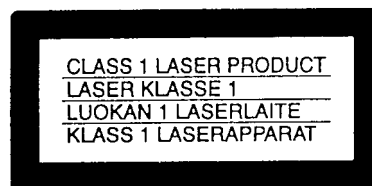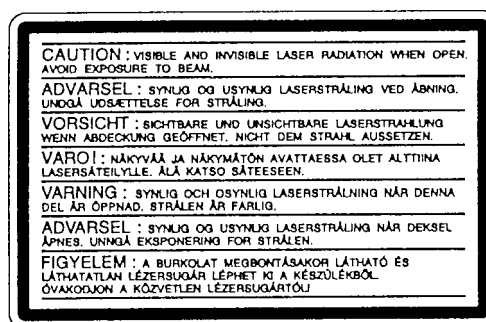

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are "pinched" or contact high-wattage resistors.
3. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
4. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
5. Check the B+ voltage to see it is at the values specified.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK $\triangle$ OR DOTTED LINE WITH MARK $\triangle$ ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.


TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Section</u>	<u>Title</u>	<u>Page</u>
Service Note		4	HS16S9E Printed Wiring Board		4-59
1. GENERAL			HS16S9E Schematic Diagram		4-61
Getting Started		1-1	5. IC PIN FUNCTION DESCRIPTION		
Playing Discs		1-4	5-1. System Control Pin Function		
Using Various Functions with the Control Menu		1-6	(MB-86 Board IC102)		5-1
Settings and Adjustments		1-11	6. TEST MODE		
2. DISASSEMBLY			6-1. General Description		6-1
2-1. Case Removal		2-1	6-2. Starting Test Mode		6-1
2-2. Rear Panel Removal		2-1	6-3. Syscon Diagnosis		6-1
2-3. Tray Cover Removal		2-1	6-4. Drive Auto Adjustment		6-5
2-4. Front Panel Removal		2-1	6-5. Drive Manual Operation		6-7
2-5. Power Block Removal		2-2	6-6. Mecha Aging		6-9
2-6. Mechanism Deck Removal		2-2	6-7. Emergency History		6-9
2-7. Tray Removal		2-2	6-8. Version Information		6-10
2-8. Optical Pick-up Removal		2-2	6-9. Video Level Adjustment		6-10
2-9. Belt, MB-86 Board, Loading Motor (M001),			6-10. If Con Self Diagnostic Function		6-11
MS-48 Board Removal		2-3	7. ELECTRICAL ADJUSTMENT		
2-10. AI-17 Board Removal		2-3	7-1. Power Supply Adjustment		7-1
2-11. Internal Views		2-4	1. HS16S9E Board		7-1
2-12. Circuit Boards Location		2-5	7-2. Adjustment of Video System		7-2
3. BLOCK DIAGRAMS			1. Video Level Adjustment		7-2
3-1. Overall Block Diagram		3-1	2. S-terminal Output Check		7-2
3-2. RF/Servo Block Diagram		3-3	3. Checking Component Video Output B-Y		7-2
3-3. Signal Processor Block Diagram		3-5	4. Checking Component Video Output R-Y		7-2
3-4. System Control Block Diagram		3-7	5. Checking Component Video Output Y		7-3
3-5. Audio (1) Block Diagram		3-9	6. Checking RGB Output R		7-3
3-6. Video/Audio (2) Block Diagram		3-11	7. Checking RGB Output G		7-3
3-7. Interface Control Block Diagram		3-13	8. Checking RGB Output B		7-3
3-8. Power Block Diagram		3-15	9. Checking S Video output S-C		7-4
4. PRINTED WIRING BOARDS AND SCHEMATIC			7-3. Adjustment Related Parts Arrangement		7-6
DIAGRAMS			8. REPAIR PARTS LIST		
4-1. Frame Schematic Diagrams		4-3	8-1. Exploded Views		8-1
4-2. Printed Wiring Boards and Schematic Diagrams		4-5	8-1-1. Case Assembly (S335/S336/S345/S535D)		8-1
MS-48 Printed Wiring Board and			8-1-2. Case Assembly (S735D)		8-2
Schematic Diagram		4-5	8-1-3. Chassis Assembly		8-3
MB-86 Printed Wiring Board		4-7	8-1-4. Mechanism Deck Section		8-5
MB-86 (RF AMP, SERVO) Schematic Diagram		4-11	8-2. Electrical Parts List		8-6
MB-86 (ARP) Schematic Diagram		4-13			
MB-86 (AV DECODER) Schematic Diagram		4-15			
MB-86 (SDRAM) Schematic Diagram		4-17			
MB-86 (VGA) Schematic Diagram		4-19			
MB-86 (DRIVE) Schematic Diagram		4-21			
MB-86 (SERVO DSP) Schematic Diagram		4-22			
MB-86 (SYSTEM CONTROL)					
Schematic Diagram		4-25			
MB-86 (MEMORY, CLOCK GENERATOR)					
Schematic Diagram		4-27			
MB-86 (FGA) Schematic Diagram		4-29			
MB-86 (AUDIO DSP) Schematic Diagram		4-31			
AI-17 Printed Wiring Board		4-33			
AI-17 (VIDEO BUFFER) Schematic Diagram		4-35			
AI-17 (D/A CONVERTER, DSP)					
Schematic Diagram		4-37			
AI-17 (AMP, LPF) Schematic Diagram		4-39			
AI-17 (D/A CONVERTER) Schematic Diagram		4-41			
AI-17 (MODE CONTROL, POWER SUPPLY)					
Schematic Diagram		4-43			
AI-17 (IF CON) Schematic Diagram		4-45			
ER-9 Printed Wiring Board		4-47			
ER-9 (EURO AV1) Schematic Diagram		4-51			
ER-9 (EURO AV2) Schematic Diagram		4-53			
HP-127 Printed Wiring Board		4-56			
HP-127 Schematic Diagram		4-57			

SERVICE NOTE

1. DISASSEMBLY

- This set can be disassembled in the order shown below.

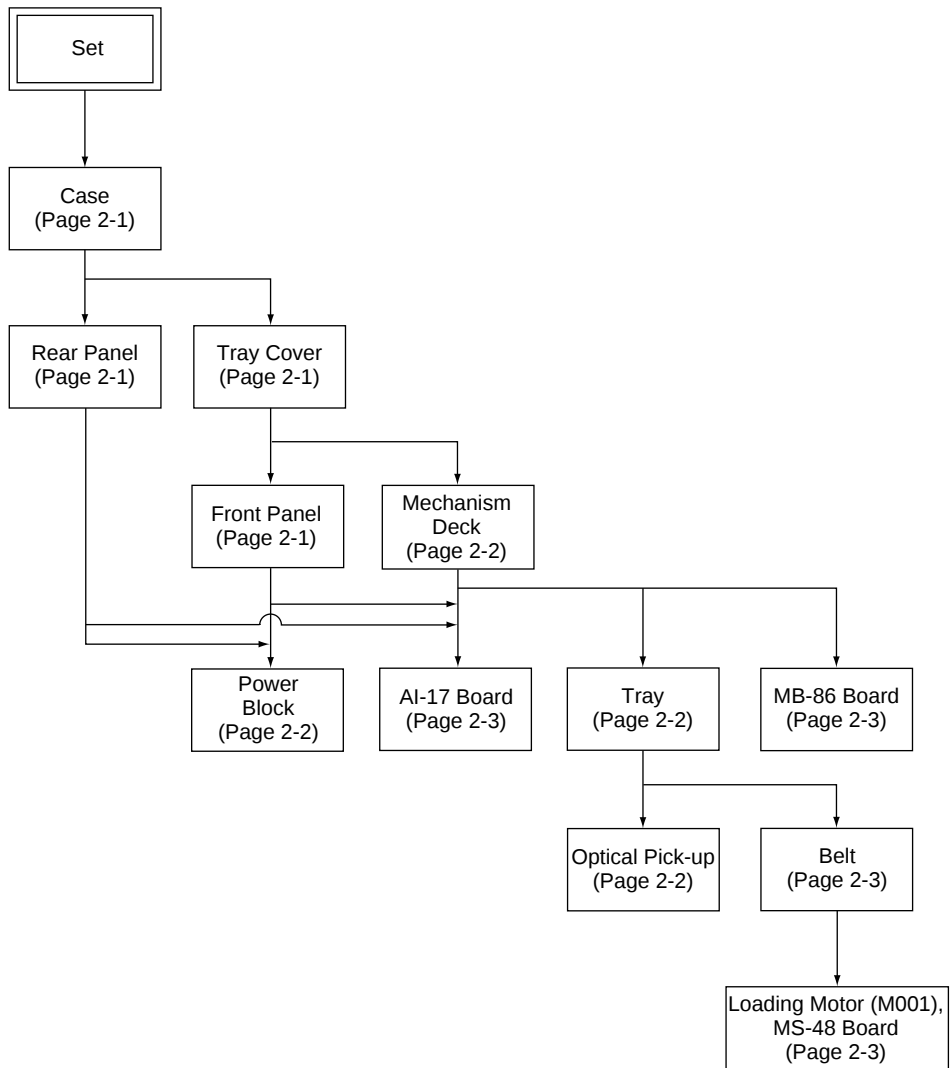

2. DISC REMOVAL PROCEDURE (at POWER OFF)

- 1) Insert a tapering driver into the aperture of the unit bottom, and move the lever of chuck cam in the direction of the arrow ①. (See Fig. 1)
- 2) Draw out the tray in the direction of the arrow ②, and remove a disc. (See Fig. 1)

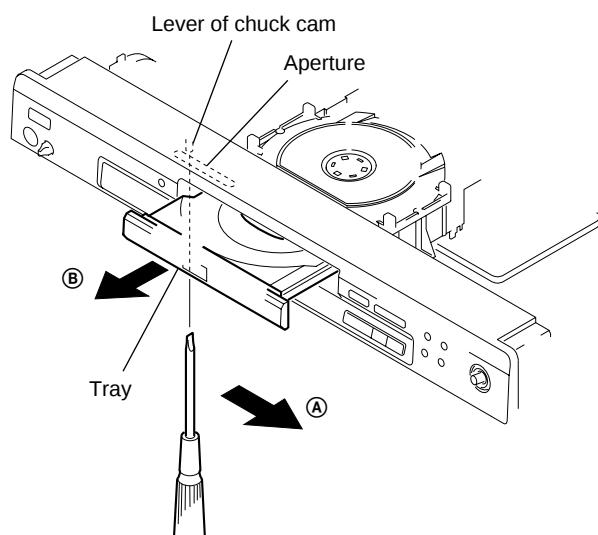


Fig. 1

3. HOW TO SERVICE MB-86 BOARD

- 1) Remove the case from the set. (Refer to 2-1)
- 2) Remove the mechanism deck. (Refer to 2-6)
- 3) Remove the MB-86 board. (Refer to 2-9)
- 4) Set the CK-MD board as shown in Fig. 2.

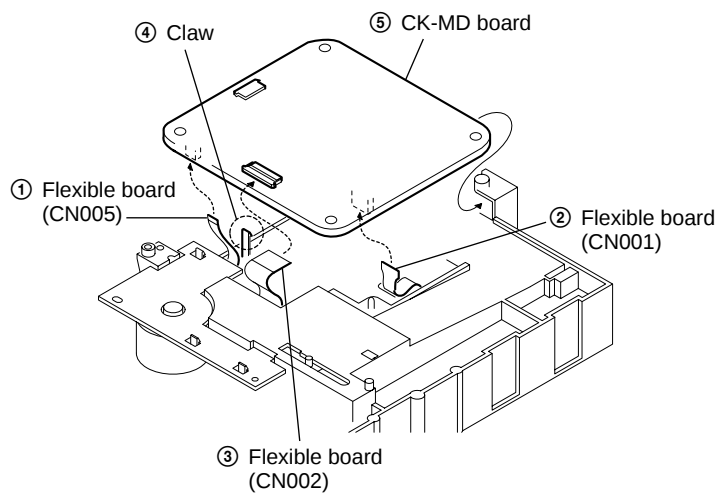


Fig. 2

- 5) Set the MB-86 board as shown in Fig. 3.

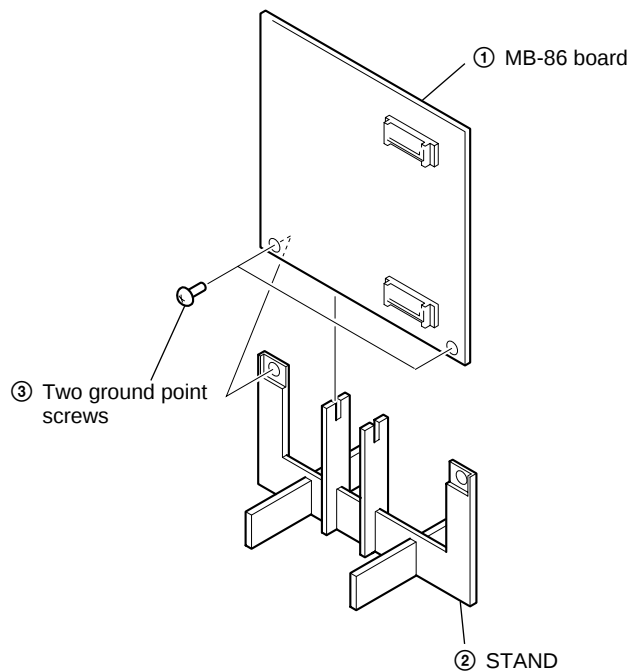


Fig. 3

6) Set the CK-MB board as shown in Fig. 4.

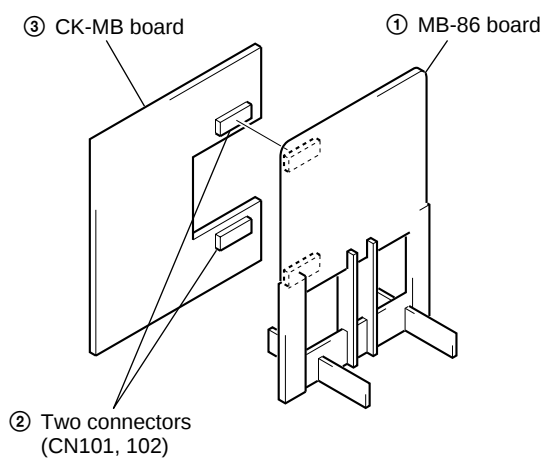


Fig. 4

8) Set the mechanism deck as shown in Fig. 6.

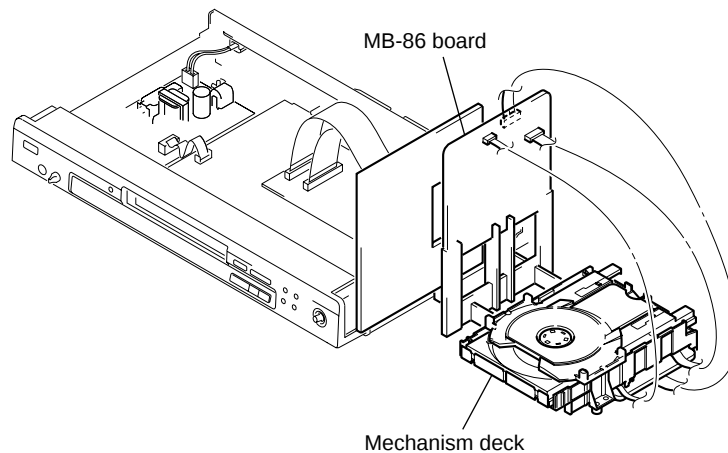


Fig. 6

7) Set the CK-AI board as shown in Fig. 5.

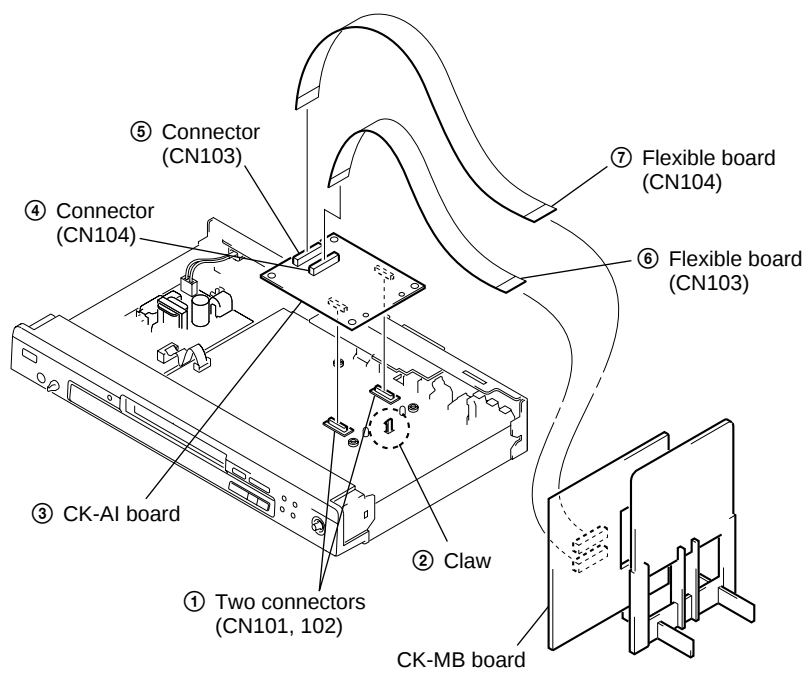


Fig. 5

SECTION 1 GENERAL

This section is extracted from DVP-S335/
S336 instruction manual (3-059-581-11).

About This Manual

Conventions

- Instructions in this manual describe the controls on the player. You can also use the controls on the remote if they have the same or similar names as those on the player.
- The icons on the right are used in this manual:

Icon	Meaning
	Indicates that you can use only the remote to do the task.
	Indicates tips and hints for making the task easier.
	Indicates that the function is for DVD VIDEOS.
	Indicates that the function is for VIDEO CDs.
	Indicates that the function is for Audio CDs.

This Player Can Play the Following Discs

	DVD VIDEOS		VIDEO CDs		Audio CDs	
Disc logo						
Contents	Audio + Video		Audio + Video		Audio	
Disc size	12 cm	8 cm	12 cm	8 cm	12 cm	8 cm (CD single)
Play time	About 4 h (for single-sided DVD) / about 8 h (for double-sided DVD)	About 80 min. (for single-sided DVD) / about 160 min. (for double-sided DVD)	74 min.	20 min.	74 min.	20 min.

The "DVD VIDEO" logo is a trademark.

When you play an NTSC disc, this player outputs the video signal in the NTSC system only. In this case, if your TV uses the PAL system, the picture becomes noisy.

Region code of DVDs you can play on this unit

Your DVD player has a region code printed on the back of the unit and will only play DVDs that are labeled with identical region codes.

DVDs labeled will also play on this unit. If you try to play any other DVD, the message "Playback prohibited by area limitations." will appear on the TV screen.

Depending on the DVD, no region code indication may be labeled even though playing the DVD is prohibited by area restrictions.


Note on playback operations of DVDs and VIDEO CDs

Some playback operations of DVDs and VIDEO CDs may be intentionally fixed by software producers. Since this player plays DVDs and VIDEO CDs according to the disc contents the software producers designed, some playback features may not be available. Also refer to the instructions supplied with the DVDs or VIDEO CDs.

4

Terms for discs

- Title**
The longest section of a picture or music feature on a DVD, the movie, etc. in video software, or the name of an album in audio software.
- Chapter**
Sections of a picture or a music feature that are smaller than titles. A title is composed of several chapters. Each chapter is assigned a chapter number enabling you to locate the chapter you want. Depending on the disc, no chapters may be recorded.
- Track**
Sections of a picture or a music feature on a VIDEO CD or a CD. Each track is assigned a track number enabling you to locate the track you want.



Index (CD) / Video Index (VIDEO CD)

A number that divides a track into sections to easily locate the point you want on a VIDEO CD or a CD. Depending on the disc, no indexes may be recorded.

Scene

On a VIDEO CD with PBC (playback control) functions, the menu screens, moving pictures and still pictures are divided into sections called "scenes." Each scene is assigned a scene number enabling you to locate the scene you want.

Note on PBC (Playback Control) (VIDEO CDs)

This player conforms to Ver. 1.1 and Ver. 2.0 of VIDEO CD standards. You can enjoy two kinds of playback according to the disc type.

Disc type	You can
VIDEO CDs without PBC functions (Ver. 1.1 discs)	Enjoy video playback (moving pictures) as well as music.
VIDEO CDs with PBC functions (Ver. 2.0 discs)	Play interactive software using menu screens displayed on the TV screen (PBC Playback), in addition to the video playback functions of Ver. 1.1 discs. Moreover, you can play high-resolution still pictures if they are included on the disc.

Discs that the player cannot play

The player cannot play discs other than the ones listed in the table on page 4: CD-Rs, CD-ROMs including PHOTO CDs, data sections in CD-EXTRAS, DVD-ROMs, DVD-audio, HD (high density) layer of Super Audio CD etc., cannot be played.

When playing DTS*-encoded CDs, excessive noise will be heard from the analog stereo outputs. To avoid possible damage to the audio system, the consumer should take proper precautions when the analog stereo outputs of the DVD player are connected to an amplification system. To enjoy DTS Digital Surround™ playback, an external 5.1-channel DTS Digital Surround™ decoder system must be connected to the digital output of the DVD player.

This product incorporates copyright protection technology that is protected by method claims of certain U.S. patents and other intellectual property rights owned by Macrovision Corporation and other rights owners. Use of this copyright protection technology must be authorized by Macrovision Corporation, and is intended for home and other limited viewing uses only unless otherwise authorized by Macrovision Corporation. Reverse engineering or disassembly is prohibited.

* "DTS" is a trademark of Digital Theater Systems, Inc.

5

Precautions

On safety

- Caution - The use of optical instruments with this product will increase eye hazard.
- Should any solid object or liquid fall into the cabinet, unplug the player and have it checked by qualified personnel before operating it any further.

On power sources

- The player is not disconnected from the AC power source (mains) as long as it is connected to the wall outlet, even if the player itself has been turned off.
- If you are not going to use the player for a long time, be sure to disconnect the player from the wall outlet. To disconnect the AC power cord (mains lead), grasp the plug itself; never pull the cord.
- Should the AC power cord (mains lead) need to be changed, have it done at a qualified service shop only.

On placement

- Place the player in a location with adequate ventilation to prevent heat build-up in the player.
- Do not place the player on a soft surface such as a rug that might block the ventilation holes on the bottom.
- Do not place the player in a location near heat sources, or in a place subject to direct sunlight, excessive dust or mechanical shock.

On operation

- If the player is brought directly from a cold to a warm location, or is placed in a very damp room, moisture may condense on the lenses inside the player. Should this occur, the player may not operate properly. In this case, remove the disc and leave the player turned on for about half an hour until the moisture evaporates.
- When you move the player, take out any discs. If you don't, the disc may be damaged.

On adjusting volume

- Do not turn up the volume while listening to a portion with very low level inputs or no audio signals. If you do, the speakers may be damaged when a peak level portion is played.

On cleaning

- Clean the cabinet, panel and controls with a soft cloth slightly moistened with a mild detergent solution. Do not use any type of abrasive pad, scouring powder or solvent such as alcohol or benzene.

If you have any questions or problems concerning your player, please consult your nearest Sony dealer.

IMPORTANT NOTICE

Caution: The enclosed DVD player is capable of holding a still video image or on-screen display image on your television screen indefinitely. If you leave the still video image or on-screen display image displayed on your TV for an extended period of time you risk permanent damage to your television screen. Projection televisions are especially susceptible to this.

Notes About the Discs

On handling discs

- To keep the disc clean, handle the disc by its edge. Do not touch the surface.
- Do not stick paper or tape on the disc. If there is glue (or a similar substance) on the disc, remove the glue completely before using the disc.



- Do not expose the disc to direct sunlight or heat sources such as hot air ducts, or leave it in a car parked in direct sunlight as the temperature may rise considerably inside the car.
- After playing, store the disc in its case.

On cleaning

- Before playing, clean the disc with a cleaning cloth. Wipe the disc from the center out.



- Do not use solvents such as benzene, thinner, commercially available cleaners or anti-static spray intended for vinyl LPs.

On novelty discs

- Do not use irregularly shaped CDs such as heart- or star-shaped CDs as they may cause the player to malfunction.

Getting Started

This section describes how to hook up the CD/DVD player to a TV (with audio/video input jacks) and/or an AV receiver (amplifier). You cannot connect this player to a TV which does not have a video input connector. Be sure to turn off the power of each component before making the connections.


Unpacking

Check that you have the following items:

- Audio/video connecting cord (1)
- Remote commander (remote) RMT-D115P (1)
- R6 (size AA) batteries (2)

Inserting batteries into the remote

You can control the player using the supplied remote. Insert two R6 (size AA) batteries by matching the + and - ends on the batteries to the markings inside the compartment. When using the remote, point it at the remote sensor on the player.




Notes

- Do not leave the remote in an extremely hot or humid place.
- Do not drop any foreign object into the remote casing, particularly when replacing the batteries.
- Do not expose the remote sensor to direct sunlight or lighting apparatuses. Doing so may cause a malfunction.
- If you do not use the remote for an extended period of time, remove the batteries to avoid possible damage from battery leakage and corrosion.

Selecting the Language for the On-Screen Display

You can select the language for the setup display, the Control Menu display or the messages displayed on the screen. The default setting is "ENGLISH."




- 1 When the player is in stop mode, press DISPLAY and select "SETUP" using $\uparrow/\downarrow$. The on-screen menu items are different depending on whether there is a disc in the player or not.




- 2 Press ENTER. The setup display appears on the TV screen.



- 3 Select "LANGUAGE SETUP" using $\uparrow/\downarrow$, and then press ENTER.



- 4 Select "OSD" using $\uparrow/\downarrow$, then press $\Rightarrow$ or ENTER. The languages you can select are displayed. These languages are different depending on the player model.



- 5 Select the desired language using $\uparrow/\downarrow$, then press ENTER.



- 6 Press DISPLAY. The setup display disappears.

- 7 Press DISPLAY repeatedly to turn off the on-screen menu.

To return to the previous screen
Press $\Leftarrow$ RETURN.


To quit while making a selection
Press DISPLAY.

Note
The languages you can select are the ones displayed in step 4. For details, see page 49.

Operation Sound Effects (Sound Feedback)

The player beeps when the following operations are performed. The default setting of the Sound Feedback function is set to off.

Operation	Operation sound
Power is turned on	One beep
Power is turned off	Two beeps
$\triangleright$ is pressed	One beep
$\blacksquare$ is pressed	Two beeps
Playback is stopped	One long beep
Operation is not possible	Three beeps



- 1 Press $\textcircled{1}$ on the player then press I/O on the remote. The power indicator lights up in green. When there is a disc in the player, press $\blacksquare$ and remove the disc. Then press $\blacksquare$ again to close the disc tray.

- 2 Press and hold $\blacksquare$ on the player for more than two seconds. You will hear one beep and the Sound Feedback function is turned on.

To turn off the Sound Feedback Function
When there is no disc in the player, press and hold $\blacksquare$ on the player for more than two seconds. You will hear two beeps and the Sound Feedback function is turned off.

16

17


Playing Discs

This chapter describes how to play a DVD/CD/VIDEO CD.

When you play a disc recorded in the NTSC color system, the player outputs the video signal or the setup display etc. in the NTSC color system and the picture may not appear on PAL color system televisions. In this case, open the disc tray and remove the disc.

Playing Discs DVD VIDEO CD

Depending on the DVD or VIDEO CD, some operations may be different or restricted. Refer to the instructions supplied with your disc.




- 1 Turn on your TV. Turn on the TV and select the video input so that you can view the pictures from this player.

When using a receiver (amplifier)
Turn on the receiver (amplifier) and select the appropriate position so that you can listen to the sound from this player.

- 2 Press $\textcircled{1}$ on the player. The player enters standby mode and the power indicator lights up in red.

- 3 Press $\blacksquare$ on the player, and place a disc on the disc tray. The player automatically turns on and the power indicator lights up in green.



- 4 Press $\triangleright$. The disc tray closes and the player starts playback (continuous play). Adjust the volume on the TV or the receiver (amplifier).

After following Step 4

- When playing a DVD
A DVD menu or title menu may appear on the TV screen (see page 22).
- When playing a VIDEO CD
A menu may appear on the TV screen depending on the VIDEO CD. You can play the disc interactively, following the instructions on the menu. (PBC Playback, see page 23.)

To turn on the player

Press $\textcircled{1}$ on the player. The player enters standby mode and the power indicator lights up in red. Then press I/O on the remote. The player turns on and the power indicator lights up in green. In standby mode, the player also turns on by pressing $\blacksquare$ on the player or by pressing $\triangleright$.

To turn off the player

Press I/O on the remote. The player enters standby mode and the power indicator lights up in red. To disconnect the power of the player, press $\textcircled{1}$ on the player.

Notes on playing DTS sound tracks on a CD

- Do not play DTS sound tracks without first connecting the player to an audio component having a built-in DTS decoder. The player outputs the DTS signal via the DIGITAL OUT OPTICAL and COAXIAL connectors even if "DTS" in "AUDIO SETUP" is set to "OFF", and may affect your ears or cause your speakers to be damaged.
- Set the sound to "STEREO" when you play DTS sound tracks on a CD. (See "Changing the Sounds" on page 32.) If you set the sound to "1/L" or "2/R", no sound will come from the DIGITAL OUT OPTICAL and COAXIAL connectors.
- If you play a CD with a DTS sound track, a loud noise may come out from the AUDIO OUT connectors, affecting your ears or causing the speakers to be damaged.



Notes on playing DTS sound tracks on a DVD

- The signals of the DTS sound tracks are output from the DIGITAL OUT OPTICAL and COAXIAL connectors only. No sound will output from the AUDIO OUT connectors.
- If the player is connected to an audio component lacking a built-in DTS decoder, do not set "DTS" in "DIGITAL OUT" to "ON" in the setup display. Otherwise, when you play the DTS sound track, a loud noise will come out from the speakers, affecting your ears or causing the speakers to be damaged.
- When you set "DTS" in "AUDIO SETUP" to "OFF", no sound will come out from the DIGITAL OUT OPTICAL and COAXIAL connectors even if you play DTS sound tracks on DVDs.

Notes

- If you leave the player or the remote in pause or stop mode for 15 minutes, the screen saver image appears automatically. To make the screen saver image go away, press $\triangleright$. (If you want to set the screen saver function to off, see page 50.)
- If you don't operate the player or the remote for more than 30 minutes when a disc is not being played, the power is automatically turned off. (Auto Power Off function)
- While playing a disc, do not turn off the player by pressing $\textcircled{1}$. Doing so may cancel the settings of the menu. When you turn off the player, press $\blacksquare$ first to stop playback and then press I/O on the remote. After the power indicator lights up in red and the player enters standby mode, press $\textcircled{1}$ on the player.

Additional operations



To	Operation
Stop	Press $\blacksquare$
Pause	Press II
Resume play after pause	Press II or $\triangleright$
Go to the next chapter, track or scene in continuous play mode	Press $\triangleright$
Go back to the preceding chapter, track or scene in continuous play mode	Press $\triangleleft$
Stop play and remove the disc	Press $\blacksquare$


You can play discs in various modes such as Program Play using the on-screen menu (Control Menu). For Control Menu operations, see page 26.

18

19

Searching for a Particular Point on a Disc

You can locate a particular point on a disc quickly by monitoring the picture or playing back slowly.



Note
Depending on the DVD/VIDEO CD, you may not be able to do some of the operations described.

Locating a point quickly by playing a disc in fast forward or fast reverse (Scan)

Press **F.F.** or **F.R.** while playing a disc. When you find the point you want, press **▶** to return to normal speed. Each time you press the **F.F.** or **F.R.** button during Speed scan, the playback speed changes. Three speeds are available. With each press, the indication changes as follows:

Playback direction
x2▶ (DVD/CD only) → 1▶ → 2▶

Opposite direction
x2◀ (DVD only) → 1◀ → 2◀

The playback speed of x2▶/x2◀ is about twice the normal speed.
The playback speed of 2▶/2◀ is faster than 1▶/1◀.

Locating a point slowly by watching the screen (Slow-motion play)

You can use this function only for DVDs or VIDEO CDs. Press **◀** or **▶** when the player is in the pause mode. When you find the point you want, press **▶** to return to the normal speed.

Each time you press the **◀** or **▶** button during Slow-motion play, the playback speed changes. Two speeds are available. With each press, the indication changes as follows:



Playback direction
1▶ ↔ 2▶

Opposite direction (DVD only)
1◀ ↔ 2◀

The playback speed of 2▶/2◀ is slower than 1▶/1◀.

Resuming Playback from the Point Where You Stopped the Disc (Resume Play)

The player remembers the point where you stopped the disc, and when "RESUME" appears on the front panel display, you can resume playback from that point. As long as you do not open the disc tray, Resume Play will work even if the player enters standby mode by pressing **I/O** on the remote.



Notes

- Resume Play may not be available on some DVDs.
- Resume Play is not available in Shuffle or Program Play mode.
- Depending on where you stopped the disc, the player may resume playback from a different point.
- The point where you stopped playing is cleared when:
 - you open or close the disc tray
 - you turn the power off by pressing **⏻** on the player
 - you change the play mode
 - you start playback after selecting a title, chapter or track
 - you change the settings in the setup display

1 While playing a disc, press **■** to stop playback.

"RESUME" appears on the front panel display and "Disc will restart from current point. To start from beginning, press **STOP** again." appears on the TV screen. If "RESUME" does not appear, Resume Play is not available.

2 Press **▶**.

The player starts playback from the point where you stopped the disc in Step 1.

To play from the beginning of the disc

When the playing time appears on the front panel display before you start playing, press **■** to reset the playing time, then press **▶**.

20



21

Using the DVD's Menu

Some DVDs have a title menu or a DVD menu that is provided with DVDs only.

Using the title menu

A DVD is divided into long sections of a picture or a music feature called "titles." When you play a DVD which contains several titles, you can select the title you want using the title menu.



1 Press TITLE.

The title menu appears on the TV screen. The contents of the menu vary from disc to disc.

2 Press **◀** / **▶** / **↑** / **↓** to select the title you want to play.

Depending on the disc, you can use the number buttons to select the title.

3 Press ENTER.



The player starts playing the selected title.

Notes

- On some DVDs, you may not be able to select the title.
- On some DVDs, a "title menu" may simply be called a "menu" or "title" in the instructions supplied with the disc. "Press ENTER" may also be expressed as "Press SELECT."

Using the DVD menu

Some DVDs allow you to select the disc contents using a menu. When you play these DVDs, you can select the language for the subtitles, the language for the sound, etc., using the DVD menu.



1 Press DVD MENU.

The DVD menu appears on the TV screen. The contents of the menu vary from disc to disc.

2 Press **◀** / **▶** / **↑** / **↓** to select the item you want to change.

Depending on the disc, you can use the number buttons to select the item.

3 To change other items, repeat Step 2.

4 Press ENTER.



To play from the beginning of the disc
Change the setting using "DVD MENU" in "LANGUAGE SETUP" in the setup display. For details, see page 49.

Note

Depending on the DVD, a "DVD menu" may simply be called a "menu" in the instructions supplied with the disc.

Playing VIDEO CDs with PBC Functions (PBC Playback)

When playing VIDEO CDs with PBC (Play Back Control) functions (Ver. 2.0 discs), you can enjoy simple interactive operations, search functions, and other such operations. PBC Playback allows you to play VIDEO CDs interactively by following the menu on the TV screen. On this player, you can use the number buttons, ENTER, **◀**, **▶**, **↑**, **↓** and **RETURN** during PBC Playback.



1 Start playing a VIDEO CD with PBC functions by following Steps 1 to 4 in "Playing Discs" on page 18.

2 Select the item number you want.

Press **↑** / **↓** to select the item number.
You can also select the item number with the number buttons on the remote.

3 Press ENTER.

4 Follow the instructions in the menu for interactive operations.

Refer to the instructions supplied with the disc, as the operating procedure may differ according to the VIDEO CD.

To go back to the menu

Press **RETURN**, **◀**, or **▶**.

To cancel PBC playback of a VIDEO CD with PBC functions and play the disc in continuous play mode

- Before you start playing, select the track number using **◀** or **▶**, then press ENTER or **▶**.
- Before you start playing, select the track number using the number buttons on the remote, then press ENTER or **▶**. "Play without PBC" appears on the TV screen and the player starts continuous play. You cannot play still pictures such as a menu.

To return to PBC playback, press **■** twice then press **▶**.


Note
Depending on the VIDEO CD, "Press ENTER" in Step 3 may be expressed as "Press SELECT" in the instructions supplied with the disc.

22

23


Using the Front Panel Display

You can check information about the disc, such as the total number of titles or tracks or remaining time, using the front panel display.



When playing back a DVD


Displaying information while playing the disc



Checking the remaining time

Press TIME/TEXT.

Each time you press TIME/TEXT while playing the disc, the display changes as shown in the following chart.

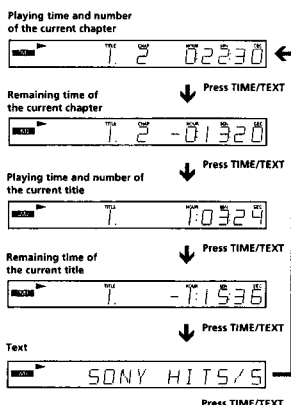


Notes

- On some DVDs, the chapter number or time may not appear or you may not be able to change the front panel display.
- While you are doing Shuffle Play or Program Play, the playing time of the title and the remaining time of the title are not displayed.

When playing back a CD/VIDEO CD

Displaying information while playing a disc




When playing VIDEO CDs with PBC functions, the current scene number is displayed instead of the current track number and the current index number. In this case, the front panel display does not change when you press TIME/TEXT. If TEXT is recorded on the disc, the front panel display changes to Text display when you press TIME/TEXT (see page 31).

Checking the remaining time

Press TIME/TEXT.

Each time you press TIME/TEXT while playing a disc, the display changes as shown in the following chart.

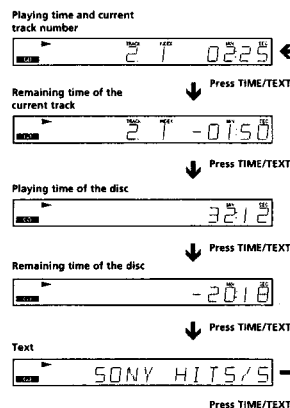

Note

While you are doing Shuffle Play, or Program Play, the playing time of the disc and the remaining time of the disc are not displayed.

24



25

Using Various Functions with the Control Menu


This chapter describes how to play discs in various modes and how to use the convenient features of the on-screen menu (Control Menu).

Using the Control Menu Display


Using the Control Menu display, you can select the start point, play in any order you like, change the angles, make Digital Cinema Sound settings, and other such operations. The possible operations are different depending on the kind of disc. For details on each Control Menu display item, see pages 28 to 45.




1 Press DISPLAY to show the Control Menu display on the TV screen.




2 Select the item you want using the up/down arrow keys.




3 Press ENTER.



4 Select the item you want using the up/down arrow keys.




5 Press ENTER.



To cancel while making a selection Press $\leftarrow$ RETURN.

To display other items

Each time you press DISPLAY, the Control Menu display changes as follows:



The Control Menu display items are different depending on the disc.

You can select some items directly

Some items can be selected by pressing the corresponding button on the remote. In this case, only the item you selected is displayed. For instructions on using the remote, see the pages of each relevant item.

Note

Some Control Menu display items require operations other than selecting the setting. For details on these items, see the relevant pages.

26

27

Control Menu Item List

- TITLE (DVD only) (page 29)/**
SCENE (VIDEO CD during PBC playback only) (page 29)/
TRACK (VIDEO CD only) (page 29)
- CHAPTER (DVD only) (page 29)/**
INDEX (VIDEO CD only) (page 29)
- TRACK (CD only) (page 29)**
- INDEX (CD only) (page 29)**

You can search for a point on the DVD by selecting the title, chapter, track, index or scene.

- TIME/TEXT (pages 30, 31)**
You can check the playing time and remaining time of the current title, chapter, track and the total playing time or remaining time of the disc.
You can also search by inputting the time code.
You can check the DVD TEXT or CD TEXT of the disc on the TV screen and the front panel display.

- AUDIO (page 32)**
If the DVD is recorded with multilingual tracks, you can select the language you want while playing the DVD.
If the DVD is recorded in multiple audio formats (PCM, Dolby Digital, MPEG or DTS), you can select the audio format you want while playing the DVD.
With multiplex CDs or VIDEO CDs, you can select the sound from the right or left channel and listen to the sound of the selected channel through both the right and left speakers.

- SUBTITLE (DVD only) (page 34)**
With DVDs on which multilingual subtitles are recorded, you can change the subtitle language whenever you want while playing the DVD, and turn it on or off whenever you want.

- ANGLE (DVD only) (page 35)**
With DVDs on which various angles (multi-angles) are recorded, you can change the angle of the scene.

- VES (DVD only) (page 36)**
Select a mode to enjoy multichannel surround sound such as Dolby Digital and MPEG.
Even if you connect only front speakers, Virtual Enhanced Surround (VES) lets you enjoy 3D sound by using 3D sound imaging to create virtual rear speakers from the sound of the front speakers (L, R) without using actual rear speakers.

- ADVANCED (DVD only) (page 37)**
You can check the play information about the bit rate or the position where the disc is played (layer).

- CUSTOM PARENTAL CONTROL (page 38)**
Using the registered password, you can set playback restrictions for desired disc.
The same password is used for both Parental Control (page 52) and Custom Parental Control.

- SETUP (page 46)**
Using the setup display, you can do the initial setup, adjust the picture and sound and set the various outputs. You can also set a language for the subtitles and the setup display, limit playback by children, and so on. For details about the setup display, see page 48.

- PROGRAM (page 40)**
You can play the contents of the disc in the order you want by arranging the order of the titles, chapters or tracks on the disc to create your own program.

- SHUFFLE (page 42)**
You can have the player "shuffle" titles, chapters or tracks and play them in a random order. Subsequent "shuffling" may produce a different playing order.

- REPEAT (page 43)**
You can play all the titles/tracks on a disc or a single title/chapter/track repeatedly.


- A-B REPEAT (page 44)**
You can play a specific portion of a title, chapter, or track repeatedly.

Searching for a Title/Chapter/Track/Index/Scene




You can search by selecting the title, chapter, track, index or scene.


Select "TITLE," "CHAPTER," "TRACK," "INDEX" or "SCENE" after pressing DISPLAY.
When you play back a DVD, "TITLE" and "CHAPTER" are displayed.
When you play back a VIDEO CD/CD, "TRACK" and "INDEX" are displayed. When you play back a VIDEO CD with PBC functions, "SCENE" is displayed.



- 1 Select "TITLE," "CHAPTER," "TRACK," "INDEX" or "SCENE" using $\uparrow/\downarrow$.
"*** (**)" is highlighted. (** refers to a number).
The number in parentheses indicates the total number of titles, chapters, tracks, indexes or scenes.



- 2 Press $\Rightarrow$ or ENTER.
"*** (**)" changes to "— (**)".



- 3 Select the number of the title, chapter, track, index or scene you want to search for using the number buttons, then press ENTER.
The player starts searching.
To cancel the number, press CLEAR before pressing ENTER.

To cancel while making a selection
Press $\Rightarrow$ RETURN.

- Notes
- The title, chapter or track number displayed is the same number recorded on the disc.
 - The index numbers are not displayed during PBC playback of VIDEO CDs.

28


29

Checking the Playing Time and Remaining Time



You can check the playing time and remaining time of the current title, chapter or track and the total playing time or remaining time of the disc.

Press DISPLAY. Then press TIME/TEXT on the remote to change the time information.
You can also check the DVD TEXT or CD TEXT. See page 31.



When playing a DVD

TIME/TEXT

- C ***:***: : Playing time of the current chapter
- C -***:***: : Remaining time of the current chapter
- T ***:***: : Playing time of the current title
- T -***:***: : Remaining time of the current title

When playing a VIDEO CD (during PBC playback)

TIME/TEXT

- ***:***: : Playing time of the current scene

When playing a VIDEO CD (in continuous play) or CD

TIME/TEXT

- T ***:***: : Playing time of the current track
- T -***:***: : Remaining time of the current track
- D ***:***: : Playing time of the current disc
- D -***:***: : Remaining time of the current disc


You can select "TIME/TEXT" directly
Press TIME/TEXT on the remote. Each time you press the button, the time information changes.

Selecting a Starting Point Using the Time Code




You can search by inputting the time code.


Select "TIME/TEXT" after pressing DISPLAY.
The time code corresponds to the approximate actual playing time. For example, to search for a scene 2 hours 10 minutes 20 seconds past the beginning, input 2:10:20.



- 1 Select "C***:***:***" (playing time of the current chapter) when playing a DVD.



- 2 Press $\Rightarrow$ or ENTER.
Time code changes to "T---:---:---".



- 3 Input the time code using the number buttons, then press ENTER.
The player starts searching.
To cancel the number, press CLEAR before pressing ENTER.

To cancel while making a selection
Press $\Rightarrow$ RETURN.


Note
When you input the time code, input the playing time of the title not the chapter or track time.

Viewing the Disc Information



You can check the DVD TEXT or CD TEXT of the disc on the TV screen and the front panel display.
DVD TEXT and CD TEXT are information recorded on the disc which you cannot change.

Press DISPLAY. Then press TIME/TEXT on the remote until DVD/CD TEXT is displayed.
The information is displayed at the bottom of the display.



You can select "TIME/TEXT" directly
Press TIME/TEXT on the remote. To display DVD/CD TEXT, press TIME/TEXT until DVD/CD TEXT is displayed.


You can view the entire DVD/CD TEXT recorded on the disc
DVD/CD TEXT is scrolled on the front panel display.

- Notes
- DVD TEXT is displayed only in English.
 - "NO TEXT" appears when the DVD/CD TEXT is not recorded on the disc.
 - This player can only display the first level of DVD/CD TEXT information.

Changing the Sounds DVD VIDEO CD

If the DVD is recorded with multilingual tracks, you can select the language you want while playing the DVD. If the DVD is recorded in multiple audio formats (PCM, Dolby Digital, MPEG or DTS), you can select the audio format you want while playing the DVD. With multiplex CDs or VIDEO CDs, you can select the sound from the right or left channel and listen to the sound of the selected channel through both the right and left speakers. In this case, the sound loses its stereo effect. For example, with a disc containing a song, the right channel may output the vocals and the left channel may output the instrumental. If you only want to hear the instrumental, you can select the left channel and hear it from both speakers.

Select "AUDIO" after pressing DISPLAY.



AUDIO

When playing a DVD

Select the language. The languages you can select are different depending on the DVD. When 4 digits are displayed, they represent the language code. Select the language code from the list on page 66. When the same language is displayed two or more times, the DVD is recorded in multiple audio formats. The current audio format is shown on the "PROGRAM FORMAT" display.

When playing a VIDEO CD or a CD

The default setting is underlined.

- **STEREO**: The standard stereo sound
- **1/L**: The sound of the left channel (monaural)
- **2/R**: The sound of the right channel (monaural)

You can select "AUDIO" directly.

Press AUDIO on the remote. Each time you press the button, the item changes.


Notes

- Depending on the DVD, you may not be able to change the languages even if multilingual tracks are recorded on the DVD.
- While playing the CD/VIDEO CD, standard stereo playback will be resumed when:
 - you open or close the disc tray
 - the player enters standby mode by pressing I/O on the remote
 - you turn the power off by pressing ⏻ on the player
- While playing the DVD, the sound may be changed when:
 - you open or close the disc tray
 - you change the title

Displaying the audio information of the disc DVD


When you select "AUDIO," the channels being played are displayed on the screen.

In Dolby Digital format, multiple signals ranging from monaural to 5.1 channel signals can be recorded on a DVD. Depending on the DVD, the number of the recorded channels may be different.



* "PCM," "DTS," "DOLBY DIGITAL" or "MPEG" is displayed. In case of "DOLBY DIGITAL," the channels in the playing track are displayed by numbers as follows:

The case of Dolby Digital 5.1 ch:




** The letters in the program format display mean the following:


- L: Front (left)
- R: Front (right)
- C: Center (monaural)
- LS: Rear (left)
- RS: Rear (right)
- S: Rear (monaural) - the rear component of the Dolby Surround processed stereo signal and the Dolby Digital signal.
- LFE: - LFE (Low Frequency Effect)

The display examples are as follows:

• PCM (stereo)




• Dolby Surround



• Dolby Digital 5.1ch

"LFE" appears only when a disc contains an LFE signal component. "LFE" remains on the "PROGRAM FORMAT" display even if the LFE signal component is not being output.



• MPEG




32

33

Changing the Sounds

DTS

"LFE" is always enclosed in a solid line regardless of the LFE signal component output.



Note


When the signal does not contain rear signal components such as LS, RS or S, the Virtual Enhanced Surround (VES) effect cannot be heard (page 36).

Displaying the Subtitles DVD

With DVDs on which subtitles are recorded, you can turn the subtitles on and off whenever you want while playing the DVD.

With DVDs on which multilingual subtitles are recorded, you can change the subtitle language whenever you want while playing the DVD, and turn it on or off whenever you want. For example, you can select the language you want to practice and turn the subtitles on for better understanding.

Select "SUBTITLE" after pressing DISPLAY.



SUBTITLE

Select the language. The languages you can select are different depending on the DVD. When 4 digits are displayed, they indicate the language code. Select the language code from the list on page 66.

You can select "SUBTITLE" directly.

Press SUBTITLE on the remote. Each time you press the button, the item changes.


Notes

- When playing a DVD on which no subtitles are recorded, no subtitles appear.
- Depending on the DVD, you may not be able to turn the subtitles on even if they are recorded on the DVD.
- Depending on the DVD, you may not be able to turn the subtitles off.
- The type and number of languages for subtitles vary from disc to disc.
- Depending on the DVD, you may not be able to change the subtitles even if multilingual subtitles are recorded on it.
- While playing the DVD, the subtitle may change when:
 - you open or close the disc tray
 - you change the title


Changing the Angles DVD

With DVDs on which various angles (multi-angles) for a scene are recorded, you can change the angles. For example, while playing a scene of a train in motion, you can display the view from either the front of the train, the left window of the train or from the right window without having the train's movement interrupted.

Select "ANGLE" after pressing DISPLAY. When the angles can be changed, the "ANGLE" indicator lights up in green.




1 Select "ANGLE."




2 Press ➡.

The number of the angle changes to "0". The number in parentheses indicates the total number of angles.



3 Select the number of the angles using the number buttons or ⬆/⬇, then press ENTER. The angle is changed to the selected angle.



You can select "ANGLE" directly.

Press ANGLE on the remote. Each time you press the button, the angle changes.

Notes

- The number of angles varies from disc to disc or from scene to scene. The number of angles that can be changed on a scene is equal to the number of angles recorded for that scene.
- Depending on the DVD, you may not be able to change the angles even if multi-angles are recorded on the DVD.

34


35

1-9

Creating Your Own Program (Program Play) DVD VIDEO CD

You can play the contents of the disc in the order you want by arranging the order of the titles, chapters or tracks on the disc and create your own program. One program can be stored in the player and contain up to 99 titles, chapters and tracks.

Select "PROGRAM" after pressing DISPLAY. When you select "ON," the "PROGRAM" indicator lights up in green.



PROGRAM


The default setting is underlined.

- QFF: plays normally.
- SET: allows you to create your own program.
- ON: plays Program Play.


Creating the program

- 1 Select "SET" in "PROGRAM." The programming display appears.

"TRACK" is displayed when you play a VIDEO CD or a CD.





- 2 Press →. "01" is highlighted. It is ready to set the first title or track for Program Play.




- 3 Select the title, chapter or track you want to program using ↑/↓, then press ENTER. For example, select title or track 2. (You can also use the number buttons and ENTER button to make a selection. In this case, the selected number is displayed on the screen.)

When playing a DVD

When both titles and chapters are recorded on the disc, select the title, then the chapter.



- When playing a VIDEO CD or CD Select the track you want to program.



- 4 To program other titles, chapters or tracks, repeat Step 3. The programmed titles, chapters or tracks are displayed in the selected order.

- 5 Press → to start Program Play.

To stop Program Play

Press CLEAR on the remote.

To change the program

- 1 In Step 2, select the program number of the title, chapter or track you want to change using ↑/↓.
- 2 Follow Step 3 for new programming.


To cancel the programmed order

To cancel all the titles, chapters or tracks in the programmed order, select "ALL CLEAR" in Step 2. To cancel the selected program, select the program using ↑/↓ in Step 2 then press CLEAR, or select "-" in Step 3 then press ENTER.

- ⚡ The program remains even after Program Play ends. When you press →, you can play the same program again.

- ⚡ You can do Repeat Play or Shuffle Play of the programmed titles, chapters or tracks. During Program Play, set "REPEAT" or "SHUFFLE" to "ON" in the Control Menu display.

- ⚡ You can select discs, titles, chapters and tracks for the program by looking at the front panel display. You can program by looking at the front panel display instead of using the programming display on the TV screen. When you select Track 3 in a VIDEO CD for Program 1, the front panel display will appear as follows:




Notes

- The number of titles, chapters or tracks displayed are the same number of titles, chapters or tracks recorded on a disc.
- The program is canceled when:
 - you open or close the disc tray
 - the player enters standby mode by pressing I/O on the remote
 - you turn the power off by pressing ⏻ on the player
- You may not be able to perform Program Play depending on the DVD.
- If you are using the PBC playback function, you must first stop the disc before you can set a program.

Playing in Random Order (Shuffle Play) DVD VIDEO CD

You can have the player "shuffle" titles or tracks and play them in a random order. The playing order may differ from the previous "shuffling."

Select "SHUFFLE" after pressing DISPLAY. When you select a shuffle mode other than "OFF," the "SHUFFLE" indicator lights up in green.



SHUFFLE

Selects the Shuffle Play setting. The default settings are underlined.

When playing a DVD and when Program Play is set to OFF

- QFF: does not play a disc in random order.
- TITLE: has the player "shuffle" titles and play them in a random order.
- CHAPTER: has the player "shuffle" chapters and play them in a random order.

When playing a VIDEO CD, CD or DVD (when Program Play is set to ON)

- QFF: does not play a disc in random order.
- ON: has the player "shuffle" titles or tracks and play them in a random order.

When playing a VIDEO CD or CD (when Program Play is set to OFF)

- QFF: does not play a disc in random order.
- TRACK: has the player "shuffle" tracks and play in a random order.

To stop Shuffle Play

Press CLEAR on the remote.

- ⚡ You can set Shuffle Play while the disc is stopped. After selecting the "SHUFFLE" option, press →. The player starts Shuffle Play.


Notes

- Shuffle Play is canceled when:
 - you open or close the disc tray
 - the player enters standby mode by pressing I/O on the remote
 - you turn the power off by pressing ⏻ on the player
- You may not be able to perform Shuffle Play depending on the DVD.
- Up to 200 chapters in a disc can be played in random order when "CHAPTER" is selected.

Playing Repeatedly (Repeat Play) DVD VIDEO CD

You can play all of the titles or tracks on a disc or a single title, chapter or track repeatedly. In Shuffle or Program Play mode, the player repeats the titles or tracks in the shuffled or programmed order. You cannot perform Repeat Play during PBC playback of VIDEO CDs (page 23).

Select "REPEAT" after pressing DISPLAY. When you select a repeat mode other than "OFF," the "REPEAT" indicator lights up in green.



REPEAT

Selects the Repeat Play setting. The default settings are underlined.

When playing a DVD and when Program Play and Shuffle Play are set to OFF

- QFF: does not play repeatedly.
- DISC: repeats all of the titles.
- TITLE: repeats the current title on a disc.
- CHAPTER: repeats the current chapter.

When playing a VIDEO CD/CD and when Program Play and Shuffle Play are set to OFF

- QFF: does not play repeatedly.
- DISC: repeats all of the tracks on a disc.
- TRACK: repeats the current track.

When Program Play or Shuffle Play is set to ON

- QFF: does not play repeatedly.
- ON: repeats Program Play or Shuffle Play.

To stop Repeat Play

Press CLEAR on the remote.

- ⚡ You can set Repeat Play while the disc is stopped. After selecting the "REPEAT" option, press →. The player starts Repeat Play.


Notes

- Repeat play is canceled when:
 - you open or close the disc tray
 - the player enters standby mode by pressing I/O on the remote
 - you turn the power off by pressing ⏻ on the player
- You may not be able to perform Repeat Play depending on the DVD.

Repeating a Specific Portion (A-B Repeat) DVD VIDEO CD

You can play a specific portion of a title, chapter or track repeatedly. This function is useful when you want to do such things as memorize lyrics.
During PBC Playback of VIDEO CDs (page 23), this function is available only while playing moving pictures.

Select "A-B REPEAT" after pressing DISPLAY. During A-B Repeat Play, the "A-B REPEAT" indicator lights up in green.



A-B REPEAT



The default setting is underlined.

- **SET**: sets the A and B points.
- **OFF**: does not play a specific portion of a title/chapter/track repeatedly.

Setting a portion for A-B repeat


1 Select "SET" in "A-B REPEAT."

The A-B REPEAT setting display appears.



2 During playback, when you find the starting point (point A) of the portion to be played repeatedly, press ENTER.


The starting point (point A) is set.



3 When you reach the ending point (point B), press ENTER again.

The set points are displayed and the player starts repeating this specific portion.

"A-B" appears on the front panel display during A-B repeat play.



To stop A-B Repeat Play

Press CLEAR on the remote.

Notes

- You can set A-B Repeat for only one specific portion.
- A-B Repeat is canceled when:
 - you open or close the disc tray
 - the player enters standby mode by pressing I/O on the remote
 - you turn the power off by pressing 0 on the player
- When you set A-B Repeat, the settings for Shuffle Play and Program Play are canceled.
- You may not be able to set A-B Repeat for some DVD or VIDEO CD scenes.

44

Settings and Adjustments


This chapter describes how to set and adjust the player using the on-screen setup menu. Most settings and adjustments are required to be set when you first use the player.

Using the Setup Display DVD VIDEO CD


Using the setup display, you can do the initial setup, adjust the picture and sound and set the various outputs. You can also set a language for the subtitles and the setup display, limit playback by children, and so on. For details on each setup display item, see pages 48 to 58.

Note

You can display the setup display only when the player is in stop mode.



1 Press DISPLAY and select "SETUP" using 4/2.




2 Press ENTER.

The setup display appears.




3 Select the main item you want using 4/2.




4 Press ENTER.


The selected main item is highlighted.




5 Select the item you want using 4/2.




6 Press ENTER.



7 Select the setting you want using 4/2/4/2.



8 Press ENTER.



9 Press DISPLAY.

The setup display disappears.

10 Press DISPLAY repeatedly to turn off the on-screen menu.

To return to the previous screen Press RETURN.

To quit while making a selection Press DISPLAY.

Note

Some setup display items require operations other than selecting the setting. For details on these items, see the relevant pages.


45

46

47

Setup Display Item List


The default settings are underlined.

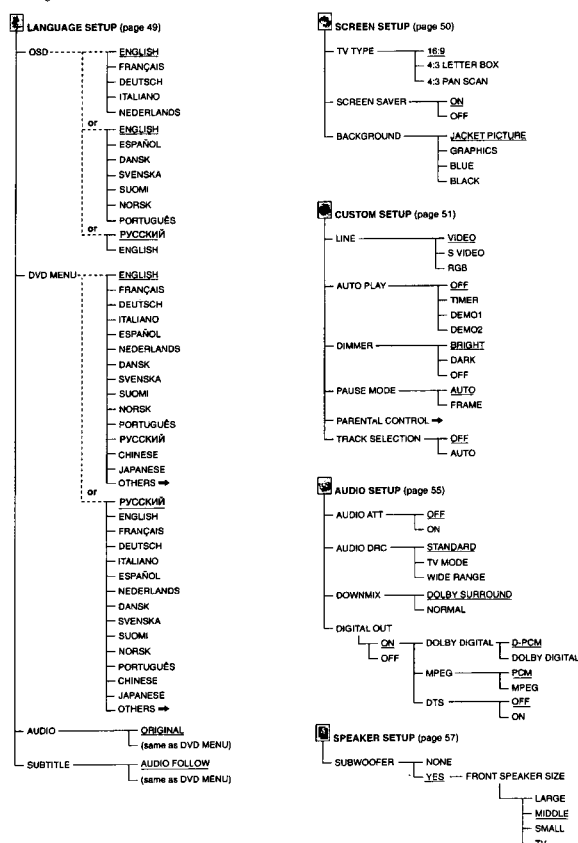

Setting the Display Language or Sound Track (LANGUAGE SETUP) DVD VIDEO CD

"LANGUAGE SETUP" allows you to set various languages for the on-screen display or sound track. The default settings are underlined.

Select "LANGUAGE SETUP" in the setup display.



Notes

- When you select a language that is not recorded on the DVD, one of the recorded languages is automatically selected for the "DVD MENU," "AUDIO" and "SUBTITLE" settings.
- Even when you select a language in "DVD MENU," "AUDIO" or "SUBTITLE," the player may not start playing with the selected language depending on the DVD.

OSD (On-Screen Display)

Selects the language for the on-screen display. The languages you can select are different depending on the player model.

Type A

- ENGLISH (English)
- FRANÇAIS (French)
- DEUTSCH (German)
- ITALIANO (Italian)
- NEDERLANDS (Dutch)

Type B

- ENGLISH (English)
- ESPAÑOL (Spanish)
- DANSK (Danish)
- SVENSKA (Swedish)
- SUOMI (Finnish)
- NORSK (Norwegian)
- PORTUGUÊS (Portuguese)

Type C

- РУССКИЙ (Russian)
- ENGLISH (English)

DVD MENU

Selects the language for the DVD menu. The language order is different depending on the player model. Default setting is "ENGLISH" or "РУССКИЙ."

- ENGLISH (English)
- FRANÇAIS (French)
- DEUTSCH (German)
- ITALIANO (Italian)
- ESPAÑOL (Spanish)
- NEDERLANDS (Dutch)
- DANSK (Danish)
- SVENSKA (Swedish)
- SUOMI (Finnish)
- NORSK (Norwegian)
- PORTUGUÊS (Portuguese)
- РУССКИЙ (Russian)
- CHINESE (Chinese)
- JAPANESE (Japanese)
- OTHERS

When you select "OTHERS," select and enter the language code from the list using the number buttons (page 66). After you have made a selection, the language code (4 digits) is displayed.

AUDIO

Selects the language for the sound track. The language order is different depending on the player model.

- ORIGINAL: the language given priority in the disc

- ENGLISH (English)
- FRANÇAIS (French)
- DEUTSCH (German)
- ITALIANO (Italian)
- ESPAÑOL (Spanish)
- NEDERLANDS (Dutch)
- DANSK (Danish)
- SVENSKA (Swedish)
- SUOMI (Finnish)
- NORSK (Norwegian)
- PORTUGUÊS (Portuguese)
- РУССКИЙ (Russian)
- CHINESE (Chinese)
- JAPANESE (Japanese)
- OTHERS

When you select "OTHERS," select and enter the language code from the list using the number buttons (page 66). After you have made a selection, the language code (4 digits) is displayed.

48

49

Setting the Display Language or Sound Track (LANGUAGE SETUP)

SUBTITLE

Selects the language for the subtitles. The language order is different depending on the player model.

- AUDIO FOLLOW
- ENGLISH (English)
- FRANÇAIS (French)
- DEUTSCH (German)
- ITALIANO (Italian)
- ESPAÑOL (Spanish)
- NEDERLANDS (Dutch)
- DANSK (Danish)
- SVENSKA (Swedish)
- SUOMI (Finnish)
- NORSK (Norwegian)
- PORTUGUÊS (Portuguese)
- РУССКИЙ (Russian)
- CHINESE (Chinese)
- JAPANESE (Japanese)
- OTHERS


When you select "OTHERS," select and enter the language code from the list using the number buttons (page 66). After you have made a selection, the language code (4 digits) is displayed.

When you select "AUDIO FOLLOW," the language for the subtitles changes according to the language for the setting you selected in "AUDIO."

Settings for the Display (SCREEN SETUP) DVD VIDEO CD

"SCREEN SETUP" allows you to set the display according to the playback conditions. The default settings are underlined.


Select "SCREEN SETUP" in the setup display.



TV TYPE

Selects the aspect ratio of the TV to be connected.

- 16:9: select this when you connect a wide-screen TV to the player.
- 4:3 LETTER BOX: select this when you connect a normal TV to the player. Displays a wide picture with bands on the upper and lower portions of the screen.
- 4:3 PAN SCAN: select this when you connect a normal TV to the player. Displays the wide picture on the whole screen automatically and cuts off the portions that do not fit.



Note

Depending on the DVD, "4:3 LETTER BOX" may be selected automatically instead of "4:3 PAN SCAN" and vice versa.

SCREEN SAVER

Turns on and off the screen saver. If you turn on the screen saver, the screen saver image appears when you leave the player or the remote in pause or stop mode for 15 minutes or when you play back a CD for more than 15 minutes. The screen saver will help prevent your display device from becoming damaged.

- ON: turns on the screen saver.
- OFF: turns off the screen saver.

BACKGROUND

Selects the background color or picture of the TV screen in stop mode or while playing a CD.

- JACKET PICTURE: The jacket picture appears in the background, but only when the jacket picture is already recorded on the disc.
- GRAPHICS: A preset picture stored in the player appears in the background.
- BLUE: The background color is blue.
- BLACK: The background color is black.


Note

If a disc which does not contain the jacket picture is played while "BACKGROUND" is set to "JACKET PICTURE," the picture stored in the player will automatically appear in the background.

Custom Settings (CUSTOM SETUP) DVD VIDEO CD

"CUSTOM SETUP" allows you to set the playback conditions. The default settings are underlined.

Select "CUSTOM SETUP" in the setup display.



LINE

Selects the methods of outputting video signals from the LINE-1 (RGB)-TV connector on the rear panel of the player.

- VIDEO: outputs the video signals.
- S VIDEO: outputs the S video signals.
- RGB: outputs the RGB signals.

Notes

- If your TV does not conform to the S video or the RGB signals, no picture appears on the TV screen even if you select "S VIDEO" or "RGB." Refer to the instructions supplied with your TV.
- If your TV has only one SCART (EURO AV) connector, do not select "S VIDEO."

AUTO PLAY

Selects the Auto Play setting when you connect the AC power cord to the AC outlet.

- QEE: does not use "TIMER," "DEMO1" or "DEMO2" to start playback.
- TIMER: starts playing at any time you want by connecting a timer (not supplied). Set a timer when the player is in standby mode (the power indicator lights up in red).
- DEMO1: starts playing the first demonstration automatically.
- DEMO2: starts playing the second demonstration automatically.

50

51

Custom Settings (CUSTOM SETUP)

DIMMER

- Adjusts the lighting of the front panel display.
- BRIGHT**: makes the front panel display bright.
- DARK**: makes the front panel display dark.
- OFF**: turns off the lighting of the front panel display.

PAUSE MODE (DVD only)

- Selects the picture in pause mode.
- ALTO**: A picture, including subjects that move dynamically, is output with no jitter. Normally select this position.
- FRAME**: A picture including subjects that do not move dynamically is output with high resolution.


PARENTAL CONTROL

Sets a password and playback limitation level when you play DVDs with playback limitation for children. The same password is used for both Parental Control and Custom Parental Control (page 38). For details, see "Limiting Playback by Children (Parental Control)".


Limiting Playback by Children (Parental Control) (DVD)

Playback of some DVDs can be limited depending on the age of the users. The "Parental Control" function allows you to set a playback limitation level.


Select "CUSTOM SETUP" in the setup display.




1 Select "PARENTAL CONTROL" using $\uparrow/\downarrow$, then press ENTER.



■ When you have not entered a password
The display for entering a password appears.




■ When you have already registered a password
The display for confirming the password appears. Skip Step 2.




2 Enter a password in 4 digits using the number buttons, then press ENTER.


The digits change to asterisks (*), and the display for confirming the password appears.




3 To confirm your password, enter it again using the number buttons, then press ENTER.
The display for setting the playback limitation level and changing the password appears.




4 Select "STANDARD" using $\uparrow/\downarrow$, then press ENTER.




5 Select a geographic area as the playback limitation level standard using $\uparrow/\downarrow$, then press ENTER.
When you select "OTHERS", select and enter the standard code in the table on the next page using the number buttons.



6 Select "LEVEL" using $\uparrow/\downarrow$, then press ENTER.



7 Select the level you want using $\uparrow/\downarrow$, then press ENTER.



The lower the value, the more strict the limitation.

To return to the normal screen
Press DISPLAY.

To turn off the Parental Control function and play the DVD after entering your password
Set "LEVEL" to "OFF" in Step 7, then press ENTER.

52

53

Custom Settings (CUSTOM SETUP)

To change the password

- After Step 3, select "CHANGE PASSWORD" using $\uparrow/\downarrow$, then press ENTER.
The display for changing the password appears.
- Follow Steps 2 and 3 to enter a new password.

Playing a disc which is blocked by the playback limitation level

- Insert the disc and press ENTER.
The PARENTAL CONTROL display appears.
- Enter a 4-digit password using the number buttons, then press ENTER.
The player starts playback.
When you stop playing the DVD, the level returns to the original level.

⚠ If you forget your password
Enter the 6-digit number "199703" in Step 2 to clear the current password. To enter a new password, follow the procedure from Step 2 again.

Notes

- When you play DVDs which do not have the Parental Control function, playback cannot be limited on this player.
- If you do not set a password, you cannot change the settings for playback limitation.
- Depending on the DVD, you may be asked to change the parental control level while playing the disc. In this case, enter the password, then change the level.
When you stop playing the DVD, the level returns to the original level.
- The same password is used for both Parental Control and Custom Parental Control (page 38).

Standard	Code number
Argentina	2044
Australia	2047
Austria	2046
Belgium	2057
Brazil	2070
Canada	2079
Chile	2090
China	2092
Denmark	2115
Finland	2165
France	2174
Germany	2109
Hong Kong	2219
India	2248
Indonesia	2238
Italy	2254
Japan	2276
Korea	2304
Malaysia	2363
Mexico	2362
Netherlands	2376
New Zealand	2390
Norway	2379
Pakistan	2427
Philippines	2424
Portugal	2436
Russia	2489
Singapore	2501
Spain	2149
Sweden	2499
Switzerland	2086
Taiwan	2543
Thailand	2528
United Kingdom	2184

TRACK SELECTION

Gives the sound track which contains the highest number of channels priority when you play a DVD on which multiple audio formats (PCM, DTS, MPEG AUDIO or Dolby Digital format) are recorded.

- DEF**: No priority given.
- AUTO**: Priority given.


Notes

- When you set this item to "AUTO", the language may change depending on the "AUDIO" settings in "LANGUAGE SETUP". The "TRACK SELECTION" setting has higher priority than the "AUDIO" settings in "LANGUAGE SETUP" (page 49).
- If you set "DTS" in "AUDIO SETUP" to "OFF", the DTS sound track is not played even if you set this item to "AUTO" and the highest-numbered channel audio is recorded in DTS format.
- If PCM, DTS, MPEG AUDIO and Dolby Digital sound tracks have the same number of channels, the player selects PCM, DTS, Dolby Digital and MPEG AUDIO sound tracks in this order.
- Depending on the DVD, the audio channel with priority may be predetermined. In this case, you cannot give priority to the DTS, MPEG AUDIO or Dolby Digital format by selecting "AUTO."

Settings for the Sound (AUDIO SETUP)

"AUDIO SETUP" allows you to set the sound according to the playback conditions.
The default settings are underlined.

Select "AUDIO SETUP" in the setup display.



AUDIO ATT (attenuation)

- If the playback sound is distorted, set this item to "ON".
The player reduces the audio output level.
- Selects the setting of the output from the AUDIO OUT and LINE-1, 2 connectors according to the audio equipment to be connected.
- DEF**: turns off the audio attenuation. Normally select this position.
- ON**: reduces the audio output level so that no sound distortion occurs. Select this when the playback sound from the built-in TV speakers is distorted.

Note

The setting does not affect the output from the DIGITAL OUT OPTICAL and COAXIAL connectors.

AUDIO DRC (Dynamic Range Control)

- Makes the sound clear when the volume is turned down when playing a DVD. This function works only when you play a DVD which has the AUDIO DRC function. This affects the output from the DIGITAL OUT connectors only when "DOLBY DIGITAL" is set to "D-PCM" and "MPEG" is set to "PCM" in "DIGITAL OUT", and it affects the output from the AUDIO OUT and LINE-1, 2 connectors.
- STANDARD**: Normally select this position.
- TV MODE**: makes the low sounds clear even if you turn the volume down. It is especially recommended when you listen to the sound using the speakers of the TV.
- WIDE RANGE**: It gives you the feeling of being at a live performance. When you use high quality speakers, it is more effective.

Note

When you play DVDs without the AUDIO DRC function, there may be no effect on the sound.

54

55

Settings for the Sound (AUDIO SETUP)

■ DOWNMIX

Switches the mixing down methods when you play a DVD on which rear signal components such as LS, RS or S in Dolby Digital format are recorded. For details on the rear signal components, see "Displaying the audio information of the disc" (page 33).

The "DOWNMIX" setting affects the following connectors:

- AUDIO OUT connectors
- DIGITAL OUT OPTICAL and COAXIAL connectors (when you set "DOLBY DIGITAL" to "D-PCM" in "AUDIO SETUP" in the setup display)
- **DOLBY SURROUND:** when the player is connected to an audio component that conforms to Dolby Surround (Pro Logic). The output signals which reproduce the Dolby Surround (Pro Logic) effect are mixed down to 2 channels.
- **NORMAL:** when the player is connected to an audio component that does not conform to Dolby Surround (Pro Logic). The signals without Dolby Surround (Pro Logic) effect are output.

■ DIGITAL OUT

Selects output signals via the DIGITAL OUT OPTICAL and COAXIAL connectors.

- **ON:** Normally select this position. When you select "ON," set "DOLBY DIGITAL," "MPEG" and "DTS." For details on setting these items, see "Setting the Digital Output Signal."
- **OFF:** when the player does not output the sound signals via the DIGITAL OUT OPTICAL and COAXIAL connectors, the influence of the digital circuit upon the analog circuit is at a minimum.


Notes

- When you play sound tracks with a 96 kHz sampling frequency, the output signals from the DIGITAL OUT (OPTICAL, COAXIAL) are converted to 48 kHz (sampling frequency). When the signals are output from the AUDIO OUT connectors, sampling frequency stays at 96 kHz and the output signals are converted to analog signals.
- When you select "OFF," you cannot set "DOLBY DIGITAL," "MPEG" and "DTS."

Setting the Digital Output Signal

Switches the methods of outputting audio signals when you, 1. connect a digital component such as a receiver (amplifier) having a digital connector, 2. an audio component having a built-in decoder (Dolby Digital, MPEG or DTS), 3. a DAT or MD via the DIGITAL OUT OPTICAL or COAXIAL connector using an optical or coaxial digital connecting cord. For details on the connection, see pages 12 and 14.

When you select "ON," set "DOLBY DIGITAL," "MPEG" and "DTS."



To set, press [DOLBY DIGITAL], then [ENTER].
To quit, press [EXIT].

■ DOLBY DIGITAL

Selects the Dolby Digital signals to be output via the DIGITAL OUT OPTICAL and COAXIAL connectors. You cannot select this item when you set "DIGITAL OUT" to "OFF."

- **D-PCM (Downmix PCM):** when you play Dolby Digital sound tracks, the output audio signals are mixed down to 2 channels. You can select whether the signals conform to Dolby Surround (Pro Logic) or not by making adjustments to the "DOWNMIX" item in "AUDIO SETUP."
- **DOLBY DIGITAL:** when the player is connected to an audio component with a built-in Dolby Digital decoder. If the player is connected to an audio component lacking a built-in Dolby Digital decoder, do not set this. Otherwise, when you play the Dolby Digital sound track, a loud noise or no sound will come out from the speakers, affecting your ears or causing the speakers to be damaged.

Note

When you select "D-PCM," set Virtual Enhanced Surround (VES) to "OFF." Otherwise, the player will not output signals from the DIGITAL OUT OPTICAL or COAXIAL connector.

■ MPEG

Selects the MPEG AUDIO signals to be output via the DIGITAL OUT OPTICAL and COAXIAL connectors. You cannot select this item when you set "DIGITAL OUT" to "OFF."

- **PCM:** when the player is connected to an audio component lacking a built-in MPEG decoder. If you play MPEG AUDIO sound tracks, the player outputs stereo signals via the DIGITAL OUT OPTICAL and COAXIAL connectors.
- **MPEG:** when the player is connected to an audio component having a built-in MPEG decoder. If the player is connected to an audio component lacking a built-in MPEG decoder, do not set this. Otherwise, when you play the MPEG AUDIO sound track, a loud noise will come out from the speakers, affecting your ears or causing the speakers to be damaged.

Note

The player outputs the MPEG analog audio sound only from the front speakers when you set "DIGITAL OUT" in "AUDIO SETUP" to "ON" and then set "MPEG" to "MPEG."

■ DTS

Selects the DTS signals to be output via the DIGITAL OUT OPTICAL and COAXIAL connectors. You cannot select this item when you set "DIGITAL OUT" to "OFF."

- **OFF:** when the player is connected to an audio component lacking a built-in DTS decoder.
- **ON:** when the player is connected to an audio component having a built-in DTS decoder. If the player is connected to an audio component lacking a built-in DTS decoder, do not set this. Otherwise, when you play the DTS sound track, a loud noise will come out from the speakers, affecting your ears or causing the speakers to be damaged.

Note


Select the setting correctly. Otherwise, no sound or a strange sound will come out from the speakers, affecting your ears or causing the speakers to be damaged.

Subwoofer Set Up (SPEAKER SETUP)

When you have connected a subwoofer, specify the size of the front speakers you have connected to change the frequency range output from the subwoofer so that you can obtain the best possible surround sound.

Even if you change the "SUBWOOFER" setting, the sound output from the front speakers do not change. For the speaker hookups, see pages 12 and 13. The default settings are underlined.

Select "SPEAKER SETUP" in the setup display.



To set, press [SUBWOOFER], then [ENTER].
To quit, press [EXIT].

■ SUBWOOFER

Selects whether a subwoofer is connected to the player or not.

- **NONE:** When a subwoofer is not connected to the player.
- **YES:** When a subwoofer is connected to the player. When you select "YES," set "FRONT SPEAKER SIZE." For details, see "Setting the output level from the subwoofer."

Subwoofer Set Up (SPEAKER SETUP)

Setting the output level from the subwoofer

When you select "YES" in "SUBWOOFER," set "FRONT SPEAKER SIZE." This selects the size of the connected front speakers. The frequency range output from the subwoofer varies according to the size of the front speakers.

■ FRONT SPEAKER SIZE


- **LARGE:** If you connect large speakers that will effectively reproduce bass frequencies and play a DVD recorded in 5.1 channels including an LFE signal, select this. If you feel a lack of bass frequencies from the front speakers when you select this, select "MIDDLE."

Notes

- If an LFE signal is not recorded on the disc, no sound will be output from the subwoofer even if you select "LARGE."
- When you play MPEG AUDIO sound track, an LFE signal is not output from the SUBWOOFER connector.

- **MIDDLE:** If you connect large speakers that will effectively reproduce bass frequencies and play a source on which an LFE signal is not recorded, such as CD or DVD with 2 channels, select this to output the bass frequencies from the subwoofer as well as from the front channel. If you feel a lack of bass frequencies from the front speakers when you select this, select "SMALL."
- **SMALL:** If you feel a lack of bass, select this to output even more bass frequencies from the subwoofer. If you still feel a lack of bass frequencies from the front speakers when you select this, select "TV."
- **TV:** If you use the speakers of the TV or small speakers, select this to output the bass frequencies from the subwoofer.

The subwoofer outputs the LFE signal and the frequency range according to the FRONT SPEAKER SIZE setting. The LFE signal is output only when the disc contains an LFE signal.



* Audio signal besides LFE

Note

The signals of the PCM sound tracks with a 96 kHz sampling frequency are not output from the SUBWOOFER connector.

Self-diagnosis function

When the self-diagnosis function activates to prevent the player from malfunctioning, a five-character service number (combination of a letter and digits) flashes on the screen and on the front panel display. In this case, check the following table.



First three characters	Cause and/or Corrective Action
C13	• The disc is dirty. ⇒ Clean the disc with a cleaning cloth. (page 6)
C31	• The disc is not inserted correctly. ⇒ Open the disc tray and insert the disc correctly.
Exx (xx is any number)	• To prevent a malfunction, the player has performed the self-diagnosis function. ⇒ When you contact your Sony dealer or local authorized Sony service facility, give the 5-character service number. (example: E61:10)

Language Code List

For details, see page 34, 49.

The language spellings conform to the ISO 639:1988 (E/F) standard.


Code	Language	Code	Language	Code	Language	Code	Language
1027	Afar	1186	Scots Gaelic	1350	Malayalam	1513	Siwati
1028	Abkhazian	1194	Galician	1352	Mongolian	1514	Sesotho
1032	Afrikaans	1196	Guarani	1353	Moldavian	1515	Sundanese
1039	Amharic	1203	Gujarati	1356	Marathi	1516	Swedish
1044	Arabic	1209	Hebrew	1357	Malay	1517	Swahili
1045	Assamese	1217	Hindi	1358	Maltese	1521	Tamil
1051	Aymara	1226	Croatian	1363	Burmese	1525	Telugu
1052	Azerbaijani	1229	Hungarian	1365	Nauru	1527	Tajik
1053	Bashkir	1233	Armenian	1369	Nepali	1528	Thai
1057	Byelorussian	1235	Interlingua	1376	Dutch	1529	Tigrinya
1059	Bulgarian	1239	Interlingue	1379	Norwegian	1531	Turkmen
1060	Bihari	1245	Inupiak	1393	Occitan	1532	Tagalog
1061	Bislama	1248	Indonesian	1403	(Afan) Oromo	1534	Setswana
1066	Bengali; Bangla	1253	Icelandic	1408	Oriya	1535	Tonga
1067	Tibetan	1254	Italian	1417	Punjabi	1538	Turkish
1070	Breton	1257	Hebrew	1428	Polish	1539	Tsonga
1079	Catalan	1261	Japanese	1435	Pashto; Pushto	1540	Tatar
1093	Corsican	1269	Yiddish	1436	Portuguese	1543	Twi
1097	Czech	1283	Javanese	1463	Quechua	1557	Ukrainian
1103	Welsh	1287	Georgian	1481	Rhaeto-Romanic	1564	Urdu
1105	Danish	1297	Kazakh	1482	Kirundi	1572	Uzbek
1109	German	1298	Greenlandic	1483	Romanian	1581	Vietnamese
1130	Bhutani	1299	Cambodian	1489	Russian	1587	Volapuk
1142	Greek	1300	Kannada	1491	Kinyarwanda	1613	Wolof
1144	English	1301	Korean	1495	Sanskrit	1632	Xhosa
1145	Español	1305	Kashmiri	1498	Sindhi	1665	Yoruba
1149	Spanish	1307	Kurdish	1501	Sango	1684	Chinese
1150	Estonian	1311	Kirghiz	1502	Serbo-Croatian	1697	Zulu
1151	Basque	1313	Latin	1503	Singhalese	1703	Not specified
1157	Persian	1326	Lingala	1505	Slovak		
1165	Finnish	1327	Laotian	1506	Slovenian		
1166	Fiji	1332	Lithuanian	1507	Samoa		
1171	Faroese	1334	Latvian; Lettish	1508	Shona		
1174	French	1345	Malagasy	1509	Somali		
1181	Frisian	1347	Maori	1511	Albanian		
1183	Irish	1349	Macedonian	1512	Serbian		

66

Index to Parts and Controls

Refer to the pages indicated in parentheses for details.


Front Panel

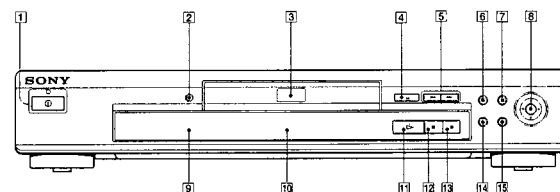

- 1 **(power) button and indicator (18)**
Disconnects the power of the player or places the player in standby mode.
- 2 **VES (Virtual Enhanced Surround) button (36)**
Press to select the desired "VES" item.
- 3 **Disc tray (18)**
Place a disc on the tray.
- 4 **OPEN/CLOSE button (18)**
Opens or closes the disc tray.
- 5 **PREV/NEXT (previous/next) buttons (19)**
Press to go to the next chapter or track, or to go back to the previous chapter or track.
- 6 **TITLE button (22)**
Displays the title menu on the TV screen.
- 7 **DVD MENU button (22)**
Displays the DVD menu on the TV screen.
- 8 **ENTER button (19)**
Selects and executes the items or settings.
- 9 **(remote sensor) (7)**
Accepts the remote control signals.
- 10 **Front Panel Display (24)**
Indicates the playing time, etc.
- 11 **(play) button (18)**
Plays a disc.
- 12 **(pause) button (19)**
Pauses playing a disc.
- 13 **(stop) button (19, 21)**
Stops playing a disc.
- 14 **DISPLAY button (26)**
Displays the Control Menu display on the TV screen to set or adjust the items.
- 15 **RETURN button (23, 27)**
Press to return to the previously selected screen, etc.


Index to Parts and Controls

Rear Panel

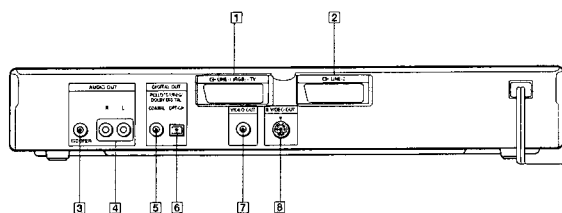

- 1 **LINE-1 (RGB)-TV connector (8, 51)**
Connect to your TV using a LINE-1 connector to output the signal from the player. You can select the video signals, the S VIDEO signals or the RGB signals as the output signal format.
- 2 **LINE-2 connector (8)**
Connect your video equipment using a LINE-2 connector to input the signal from the equipment.
- 3 **AUDIO OUT WOOFER connector (13)**
Connect to a subwoofer (not supplied).
- 4 **AUDIO OUT R (right)/L (left) connectors (9, 11)**
Connect to the audio input connector on your TV or receiver (amplifier).
- 5 **DIGITAL OUT COAXIAL connector (12, 14)**
Connect to an audio component using the coaxial digital connecting cord.
- 6 **DIGITAL OUT OPTICAL connector (12, 14)**
Connect to an audio component using the optical digital connecting cord.
- 7 **VIDEO OUT connector (9, 11)**
Connect to the video input connector on your TV or monitor.
- 8 **S VIDEO OUT connector (9, 11)**
Connect to the S video input connector on your TV or monitor.

Remote

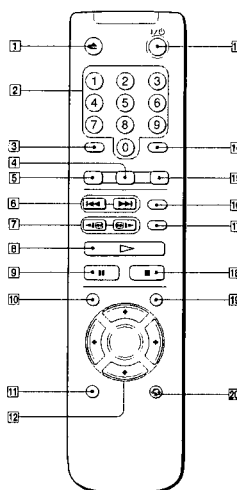

- 1 **OPEN/CLOSE button (18)**
Opens or closes the disc tray.
- 2 **Number buttons**
Selects the items or settings.
- 3 **CLEAR button (29, 41)**
Press to return to continuous play, etc.
- 4 **ANGLE button (35)**
Changes the angles when playing a DVD.
- 5 **AUDIO button (32)**
Changes the sound while playing a DVD or VIDEO CD.
- 6 **PREV/NEXT (previous/next) buttons (19)**
Press to go to the next chapter or track, or to go back to the previous chapter or track.
- 7 **SCAN/SLOW buttons (20)**
Locate a point quickly while monitoring the picture or play a disc in slow motion.
- 8 **PLAY button (18)**
Plays a disc.
- 9 **PAUSE button (19)**
Pauses playing a disc.
- 10 **TITLE button (22)**
Displays the title menu on the TV screen.
- 11 **DISPLAY button (26)**
Displays the Control Menu display on the TV screen to set or adjust the items.
- 12 **ENTER button (19)**
Selects and executes the items or settings.
- 13 **ON/STANDBY button (19)**
Press to turn on the player or place it in standby mode after power is connected by pressing 1 on the player.
- 14 **ENTER button**
Executes the items or settings.
- 15 **SUBTITLE button (34)**
Changes the subtitles when playing a DVD.
- 16 **TV/DVD button (10)**
Press to return the TV's input from CD/DVD player to the TV when you connect the player to your TV via the SCART (EURO AV) connectors.
- 17 **TIME/TEXT button (24)**
Displays the playing time of the disc, etc., on the front panel display.
- 18 **STOP button (19, 21)**
Stops playing a disc.
- 19 **DVD MENU button (22)**
Displays the DVD menu on the TV screen.
- 20 **RETURN button (23, 27)**
Press to return to the previously selected screen, etc.

68


67

69


SECTION 2 DISASSEMBLY

Note: Follow the disassembly procedure in the numerical order given.


2-1. CASE REMOVAL

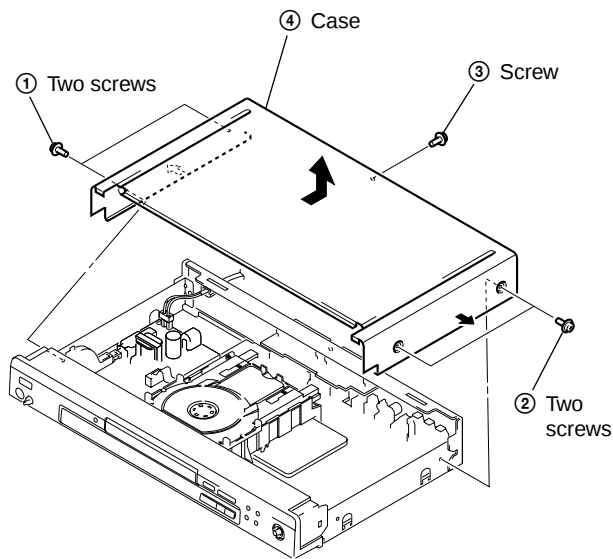


2-3. TRAY COVER REMOVAL

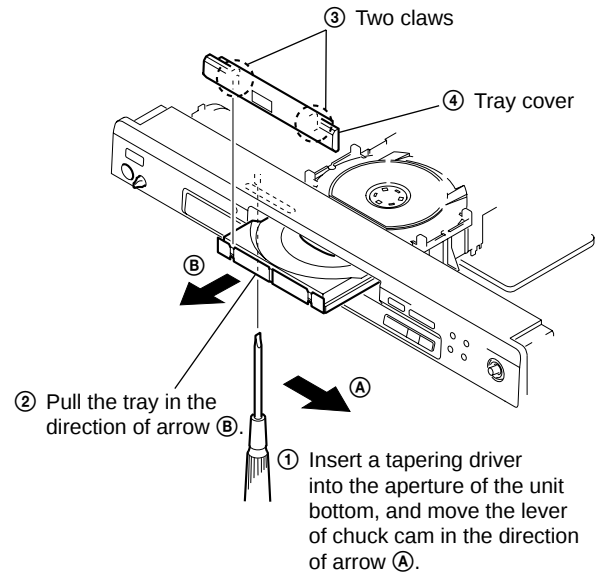


2-2. REAR PANEL REMOVAL

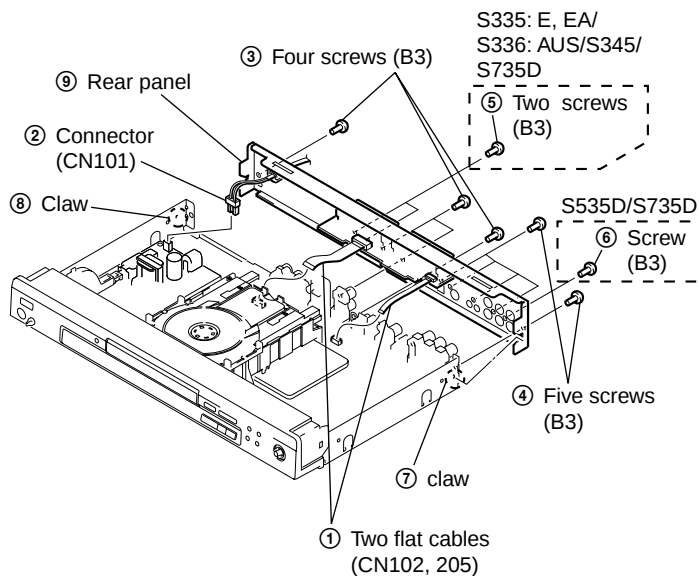


2-4. FRONT PANEL REMOVAL

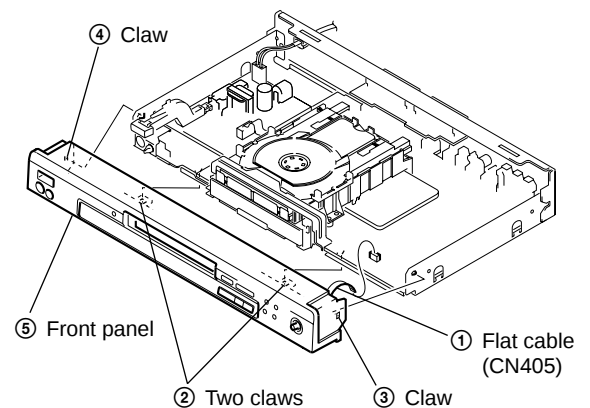


2-5. POWER BLOCK REMOVAL

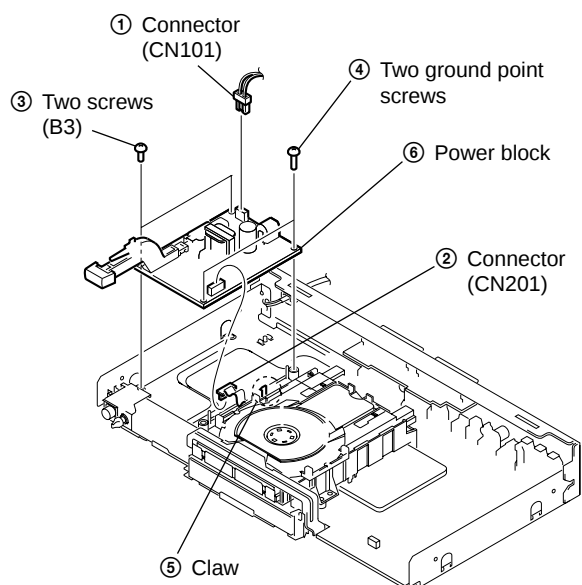


2-7. TRAY REMOVAL

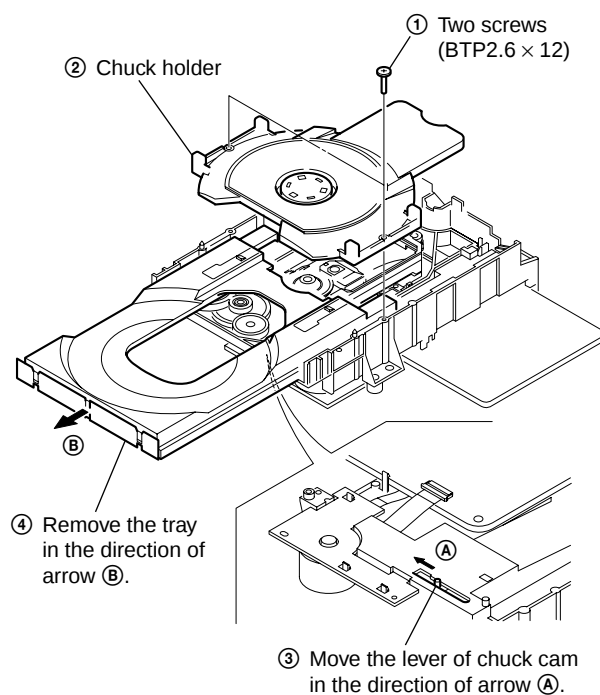


2-6. MECHANISM DECK REMOVAL

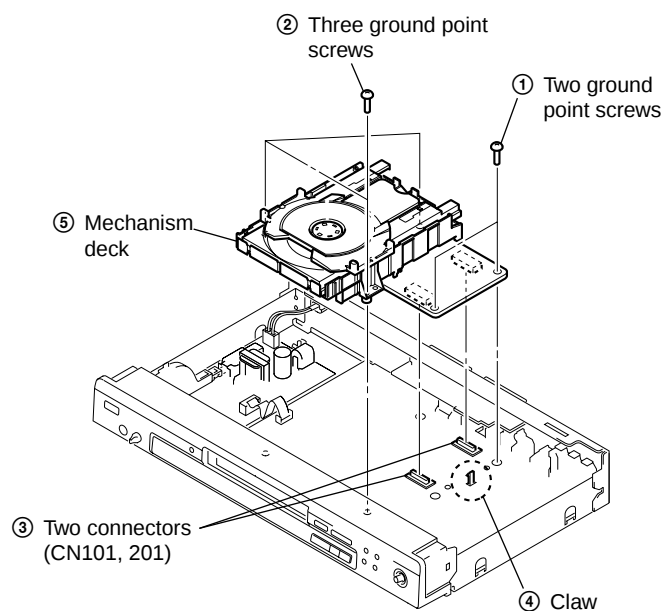


2-8. OPTICAL PICK-UP REMOVAL

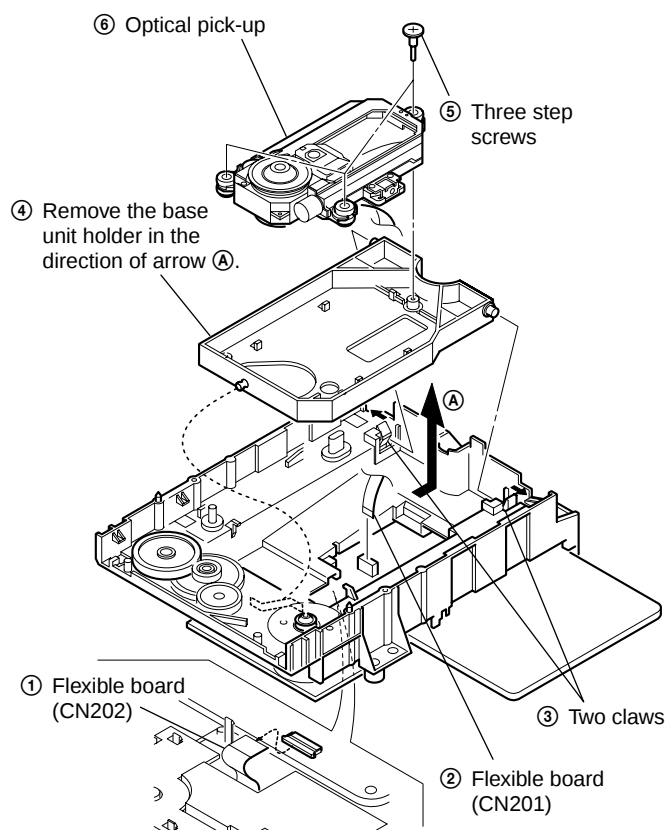

2-9. BELT, MB-86 BOARD, LOADING MOTOR (M001), MS-48 BOARD REMOVAL

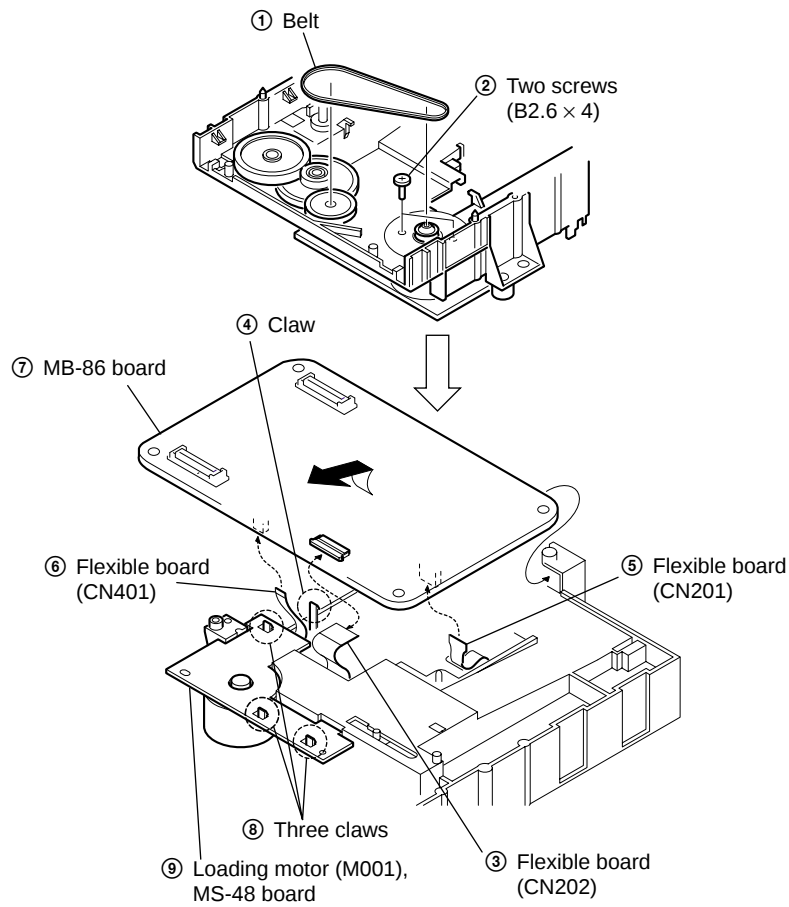

2-10. AI-17 BOARD REMOVAL

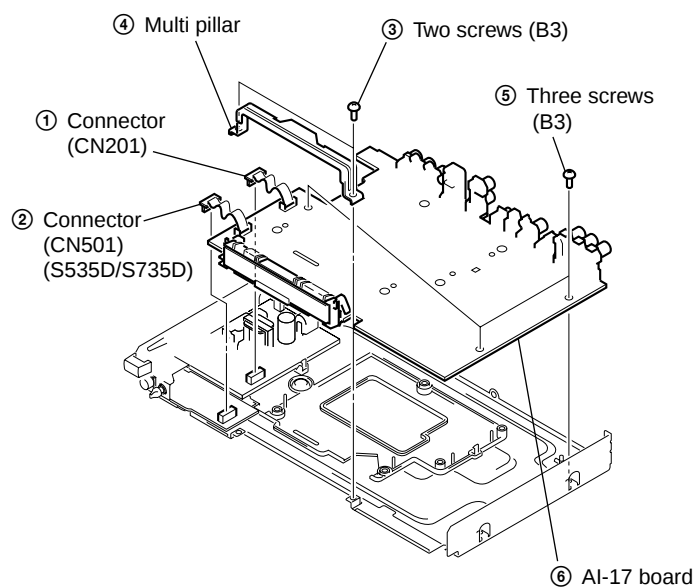


2-11. INTERNAL VIEWS

Optical pick-up
(KHM-220AAA/J1RP)
A-6062-397-A


Lever switch
1-771-562-11

DC motor (loading)
1-541-632-11

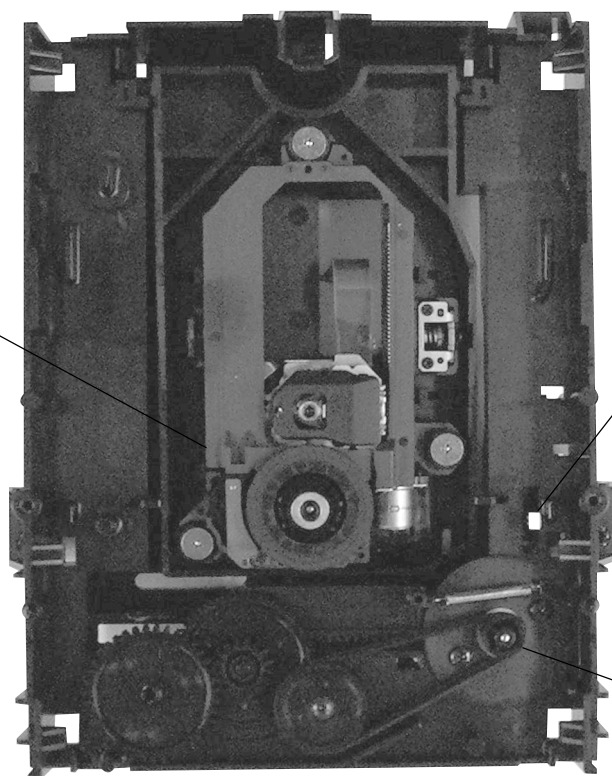


Flexible flat cable
1-792-457-11

DC motor (loading)
1-541-632-11

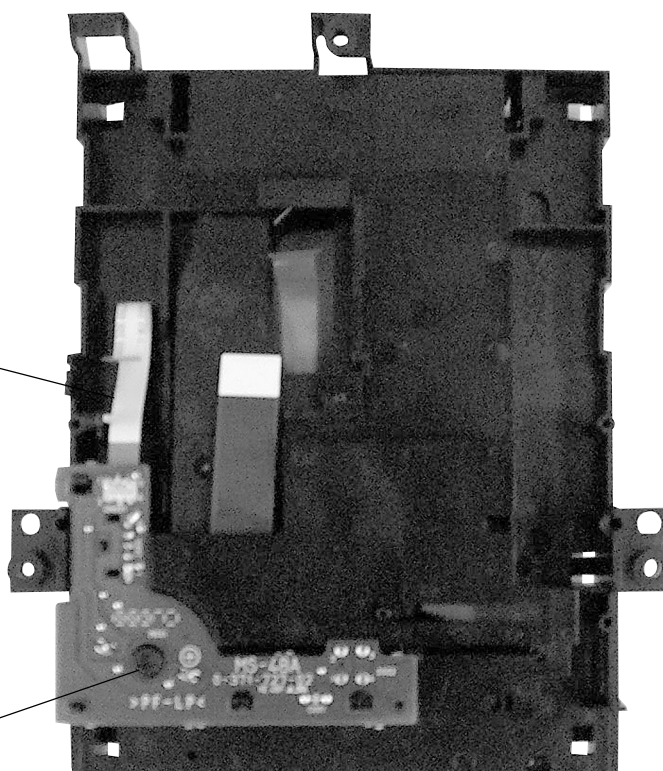


2-12. CIRCUIT BOARDS LOCATION

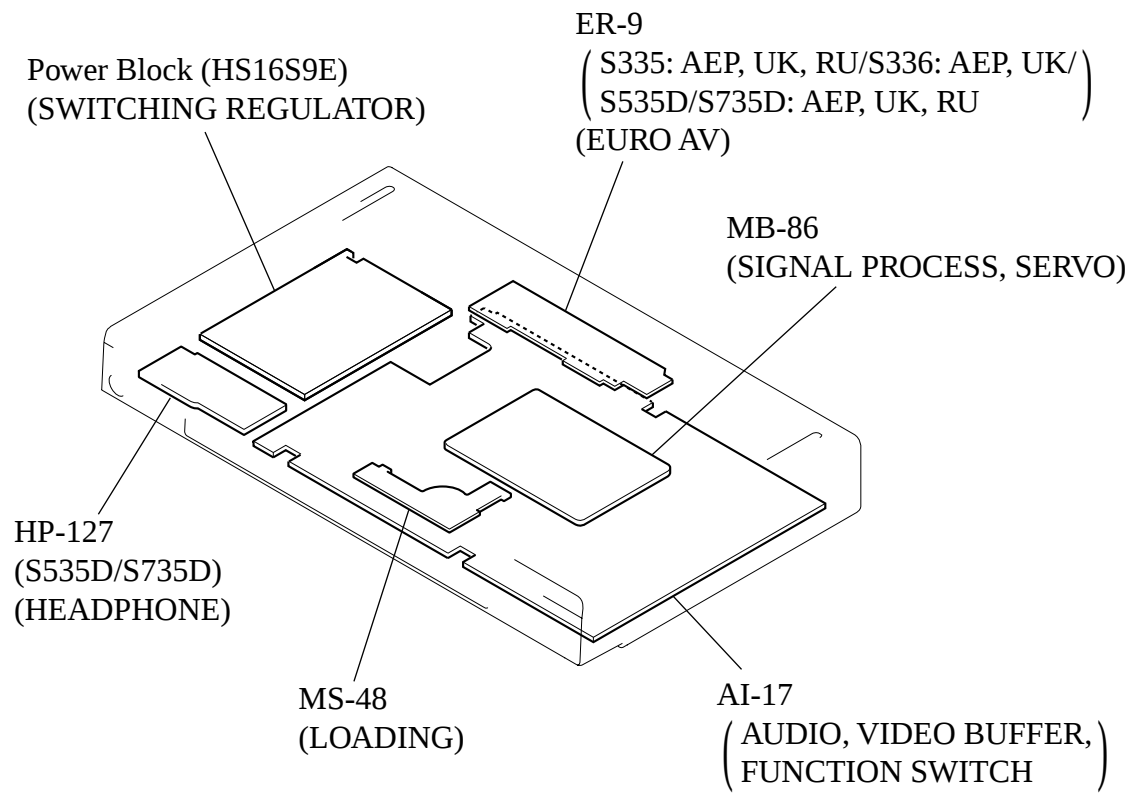


SECTION 3
BLOCK DIAGRAMS


3-1. OVERALL BLOCK DIAGRAM

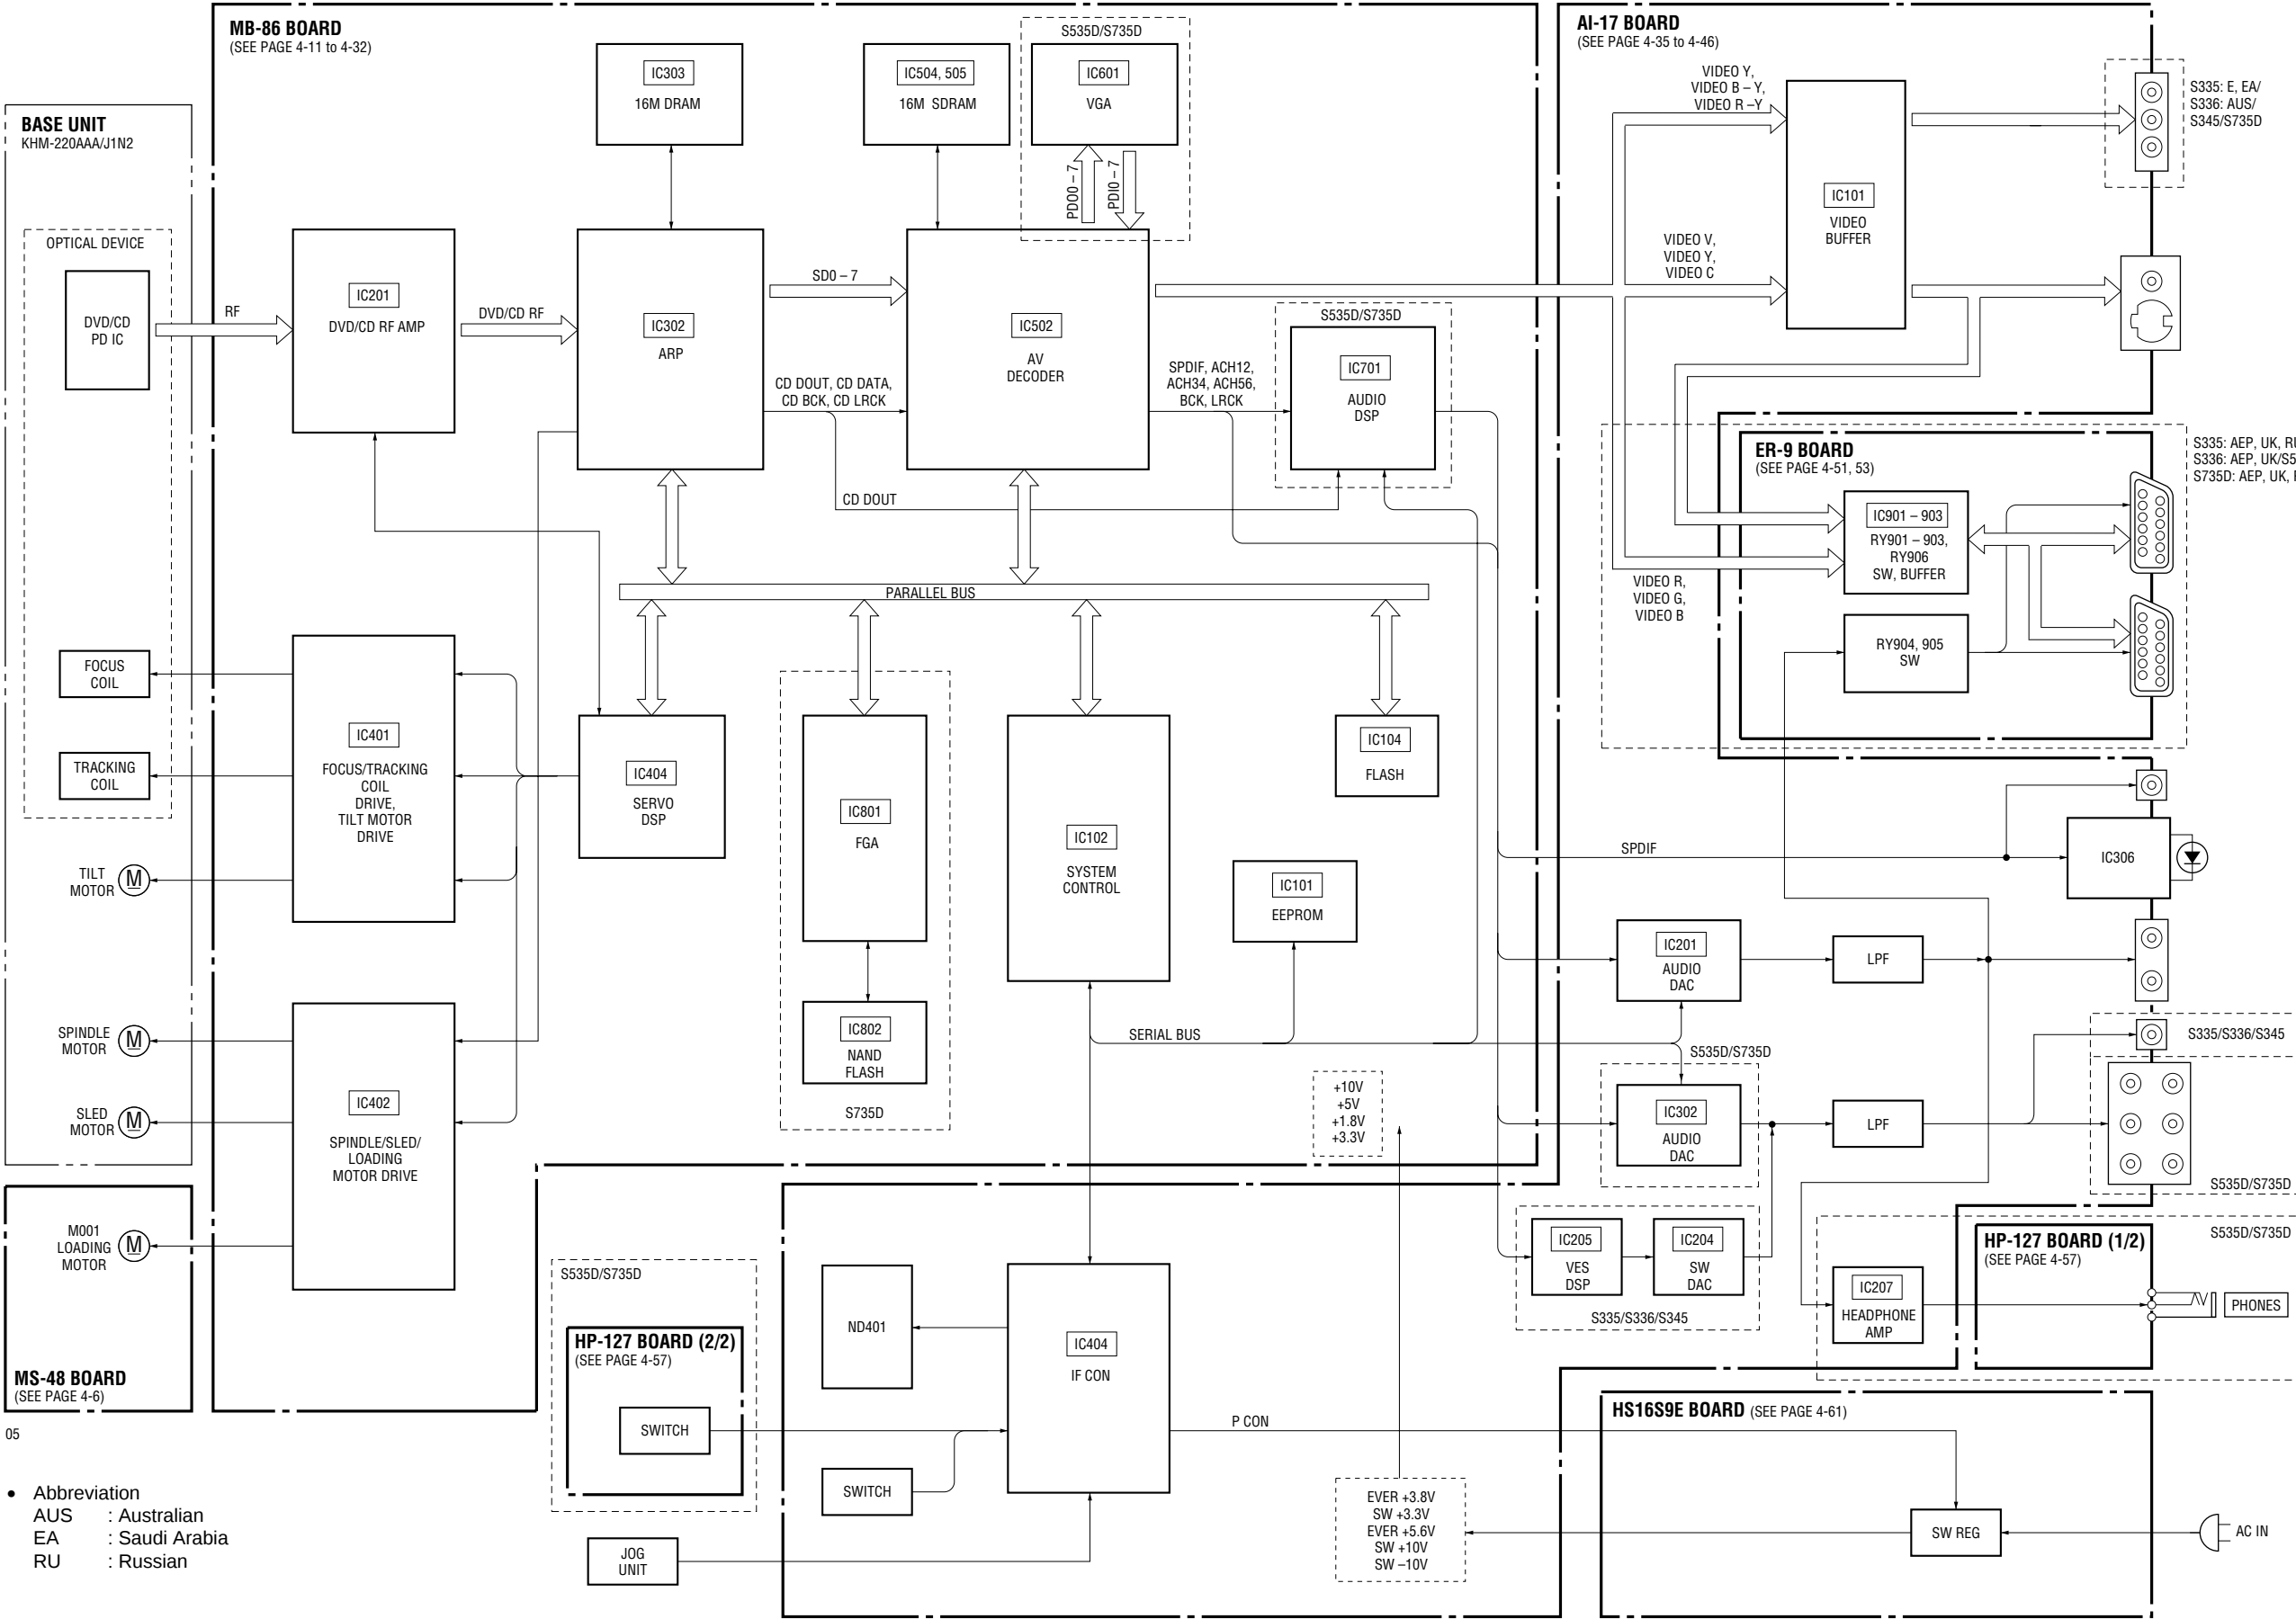


3-2. RF/SERVO BLOCK DIAGRAM

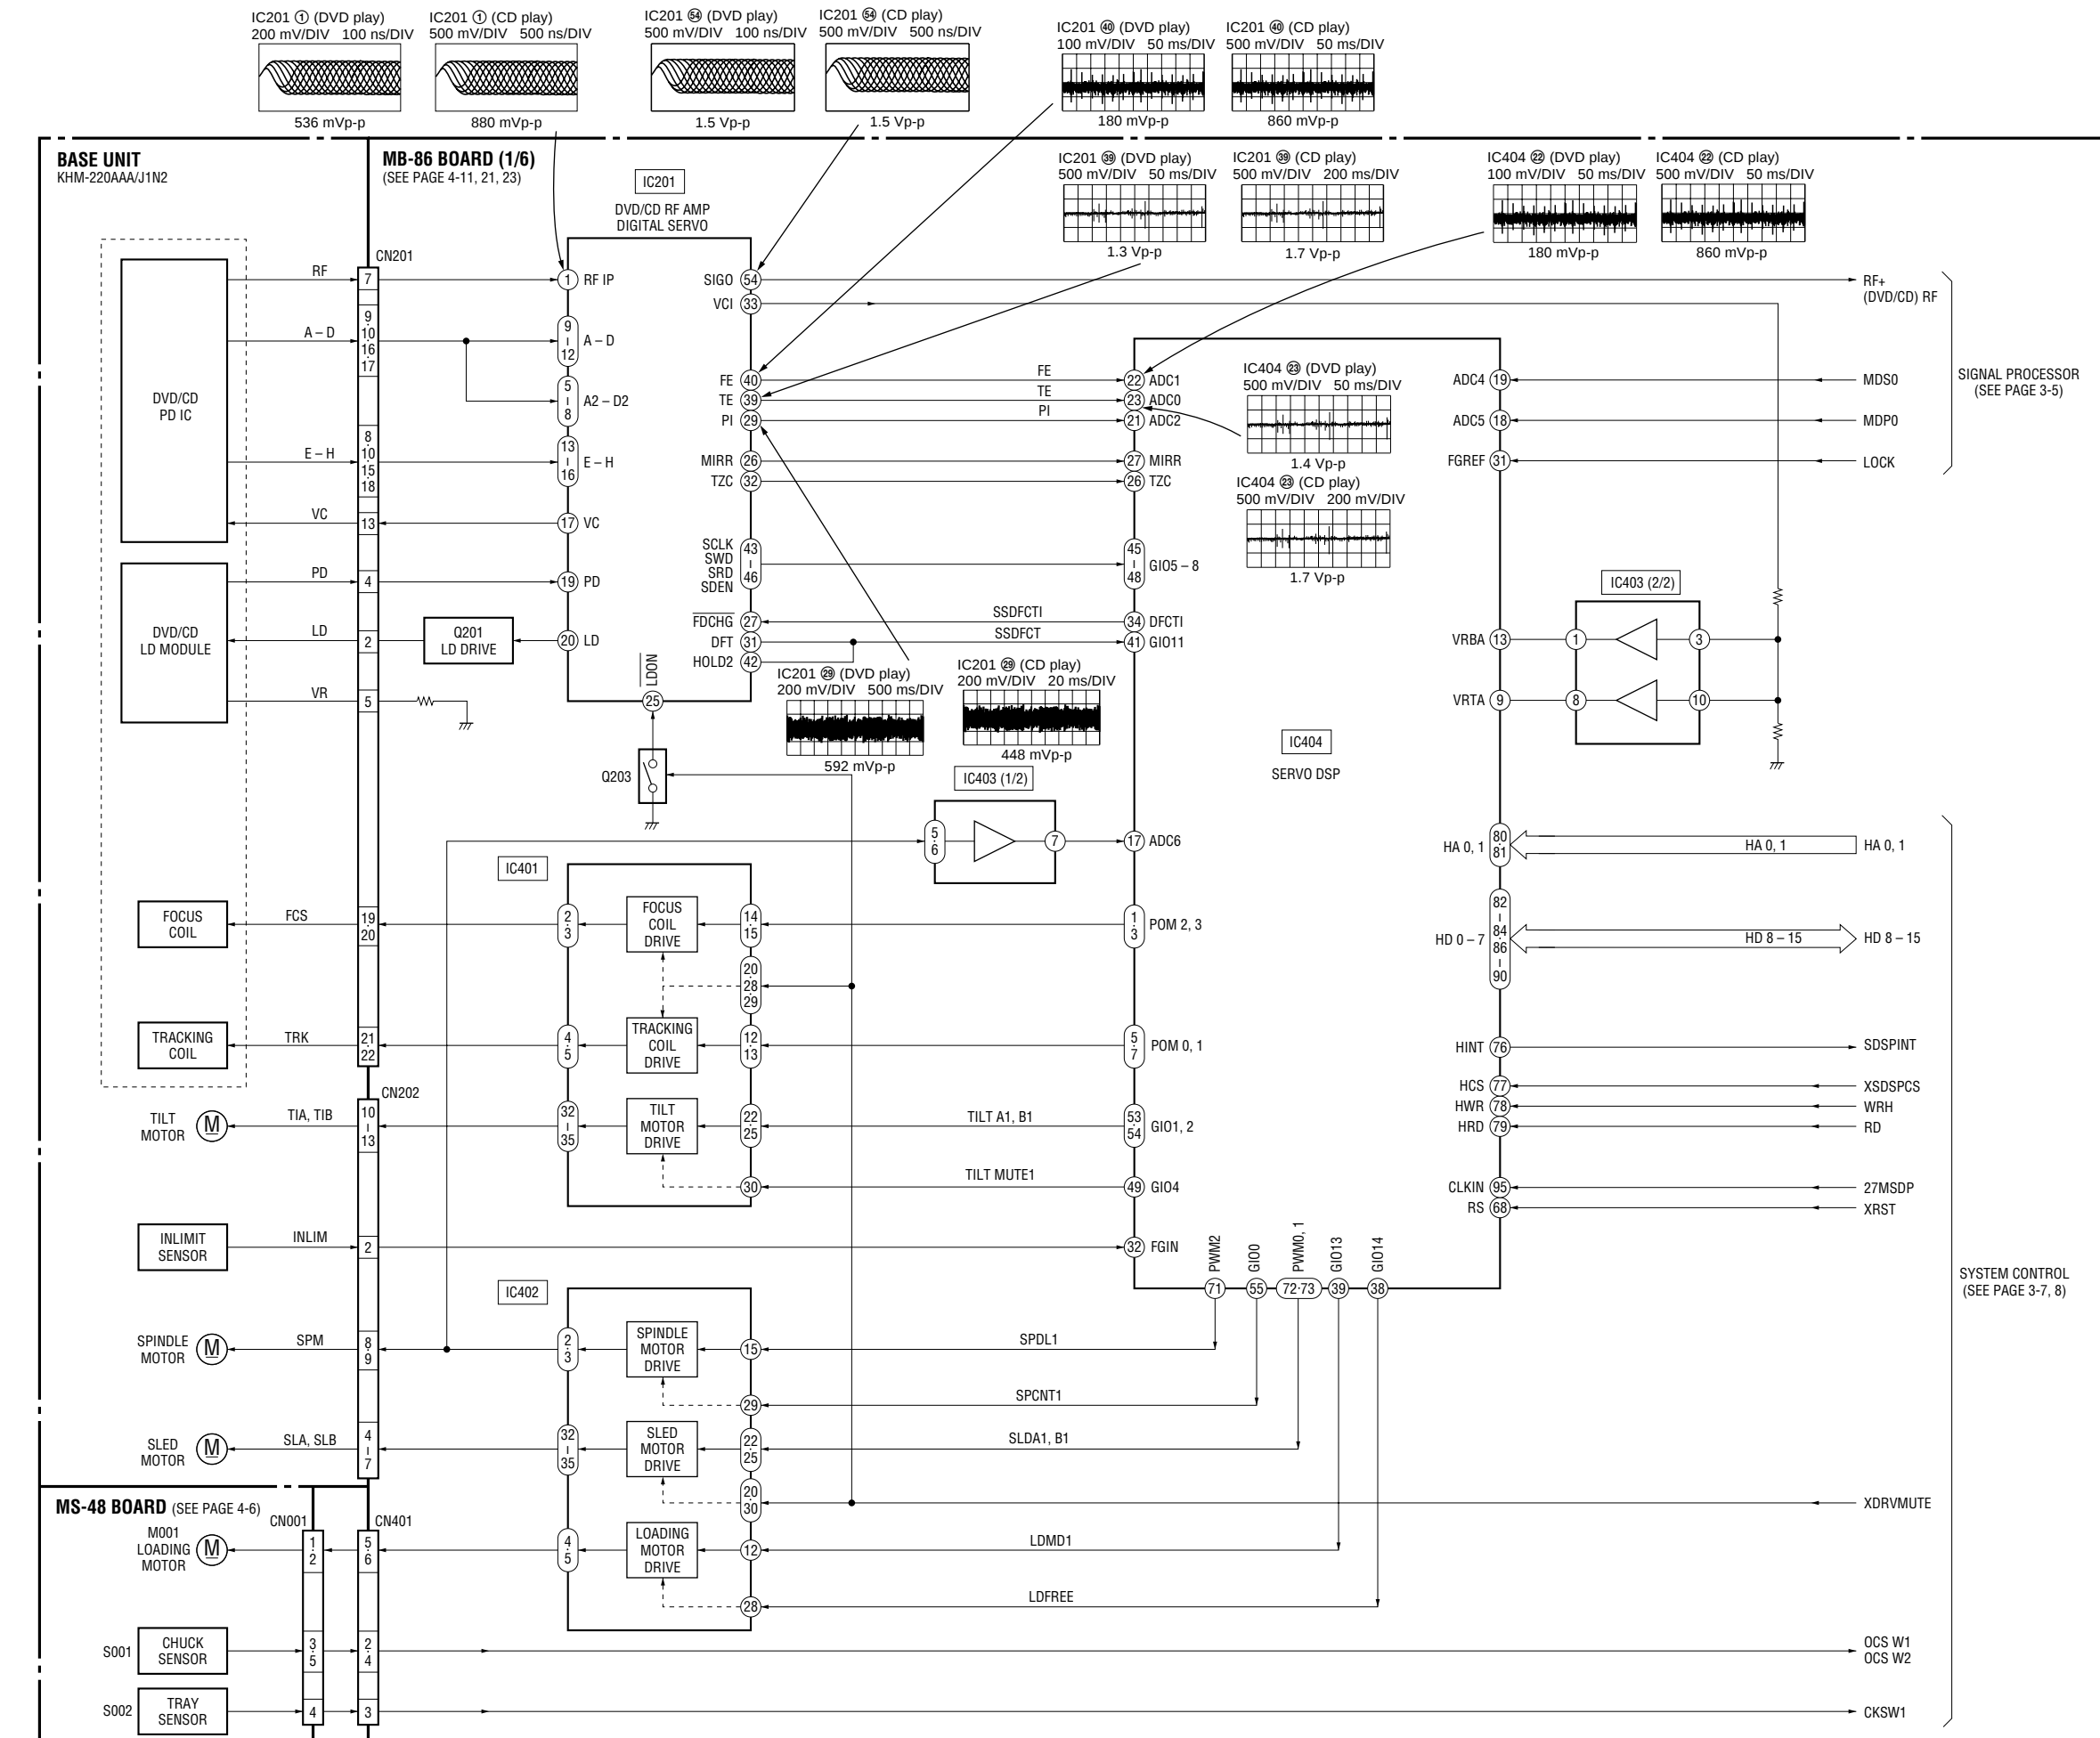


3-3. SIGNAL PROCESSOR BLOCK DIAGRAM

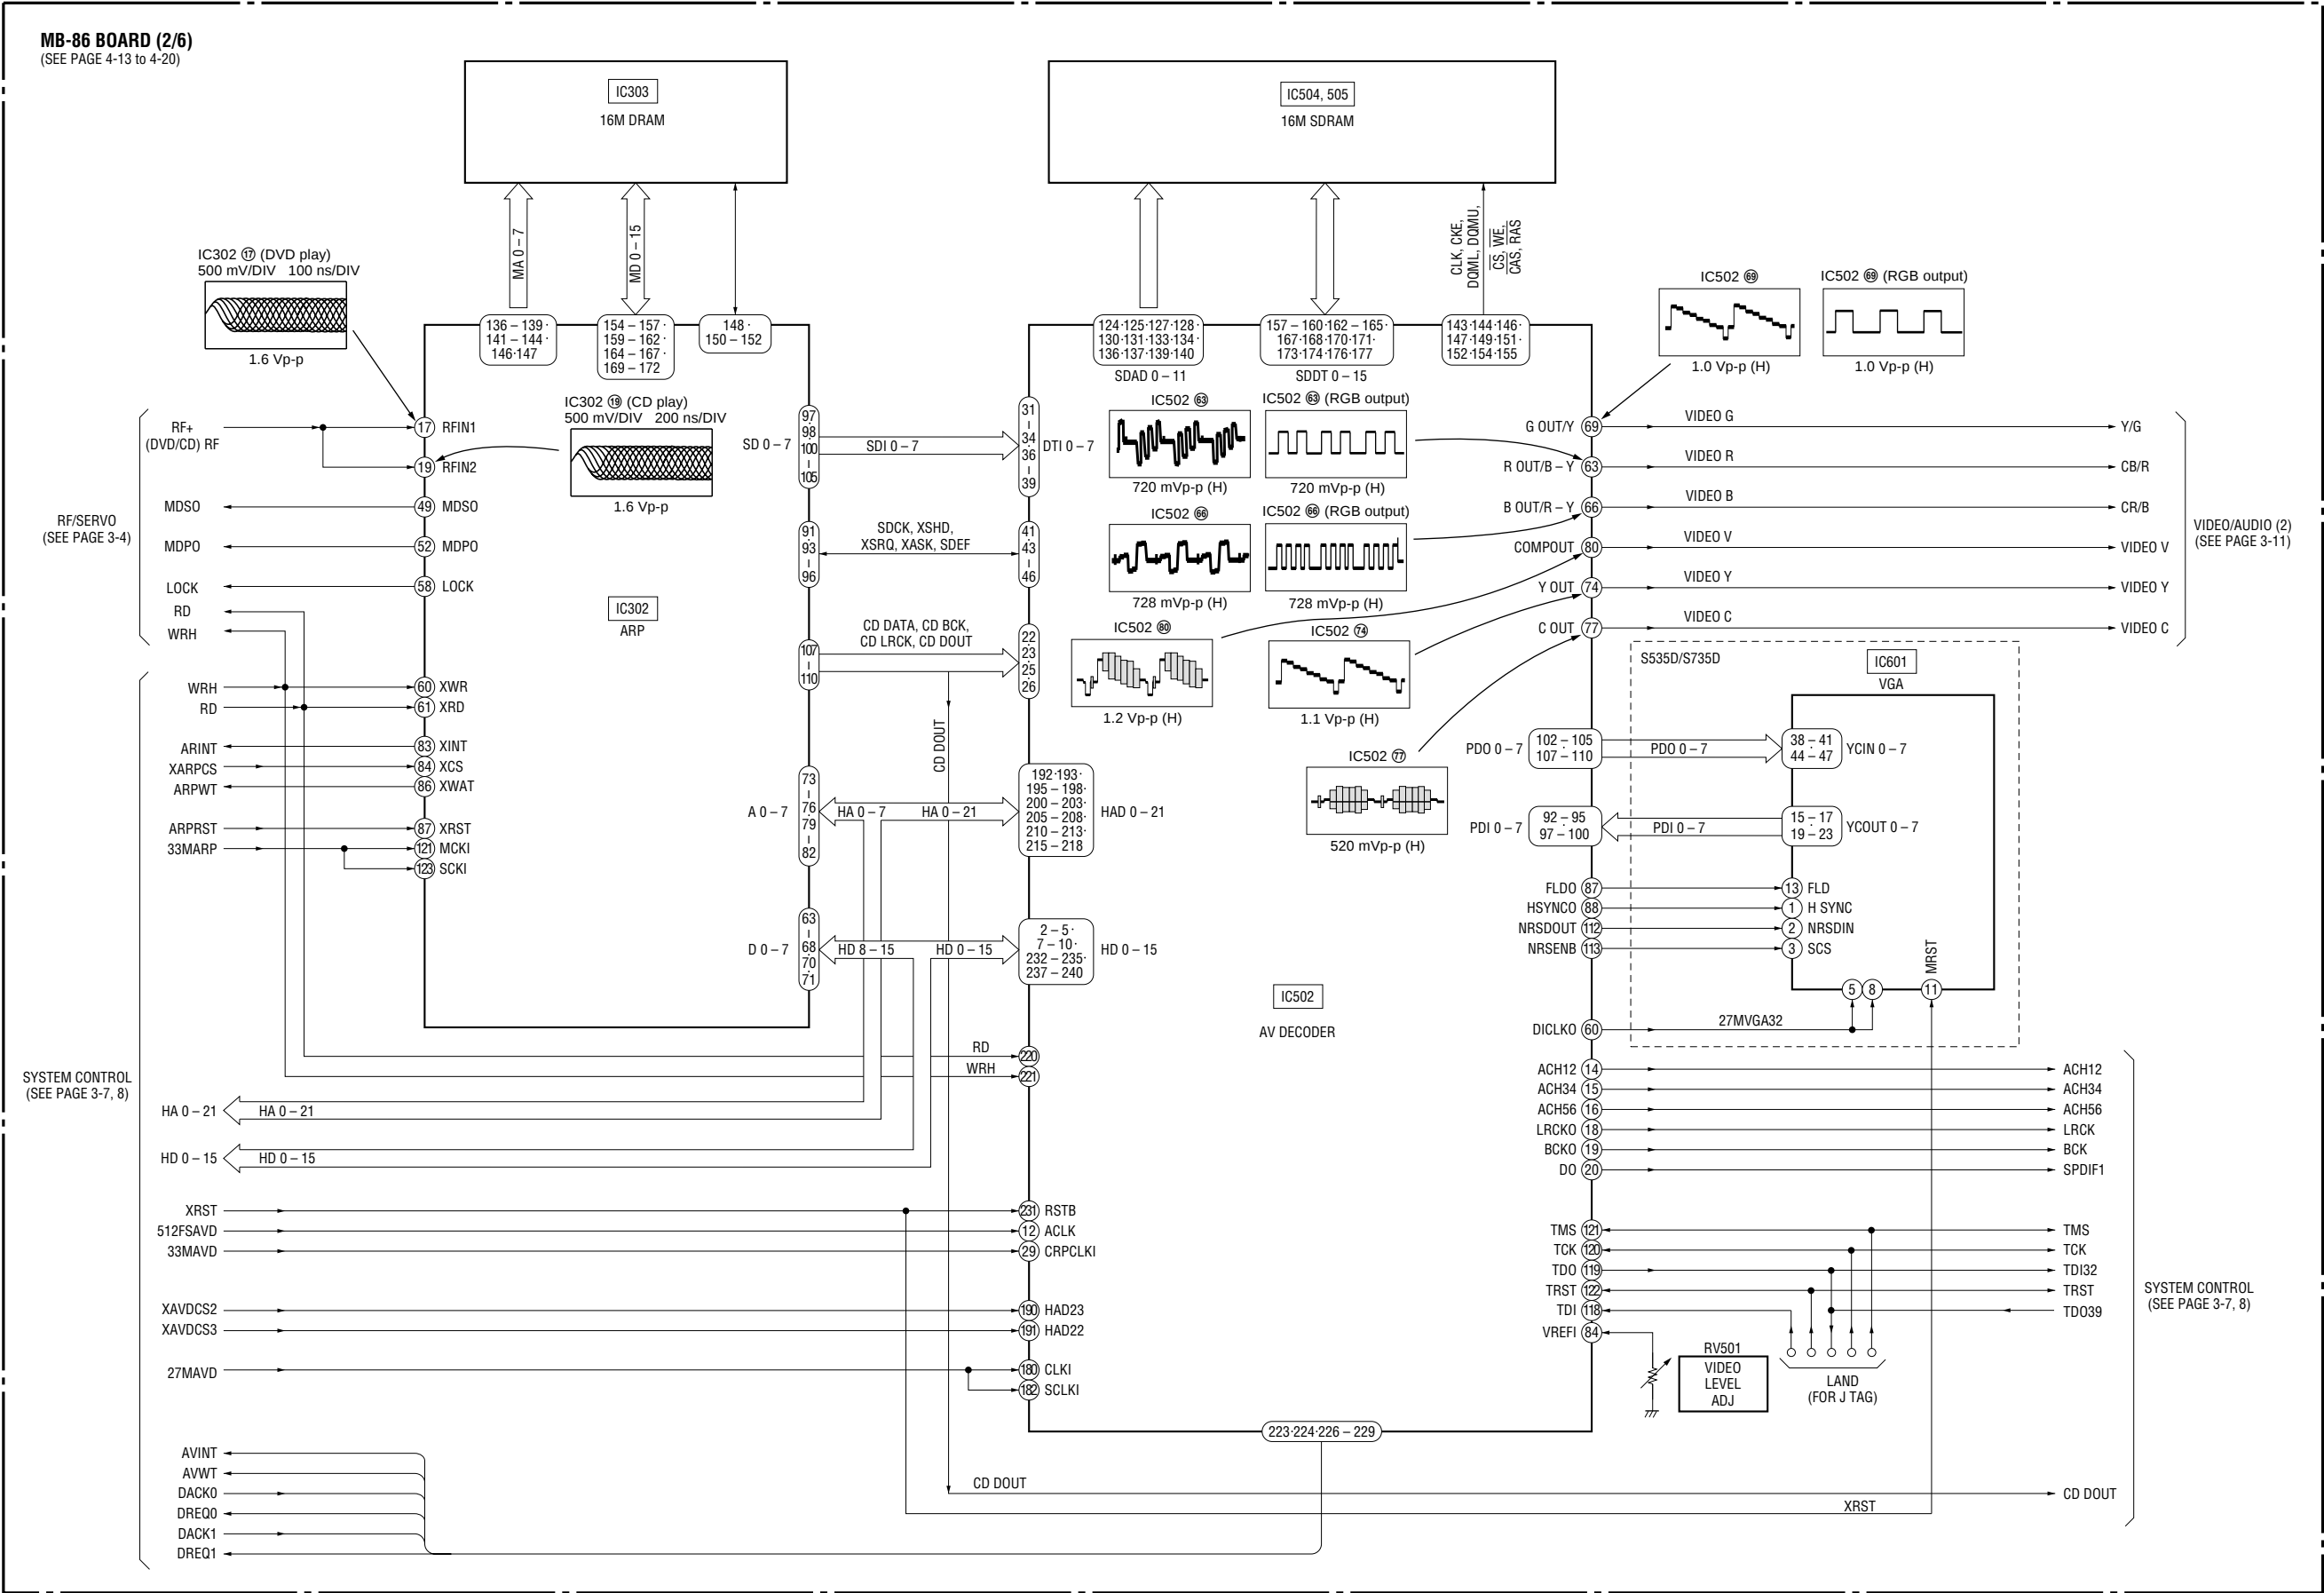


3-4. SYSTEM CONTROL BLOCK DIAGRAM

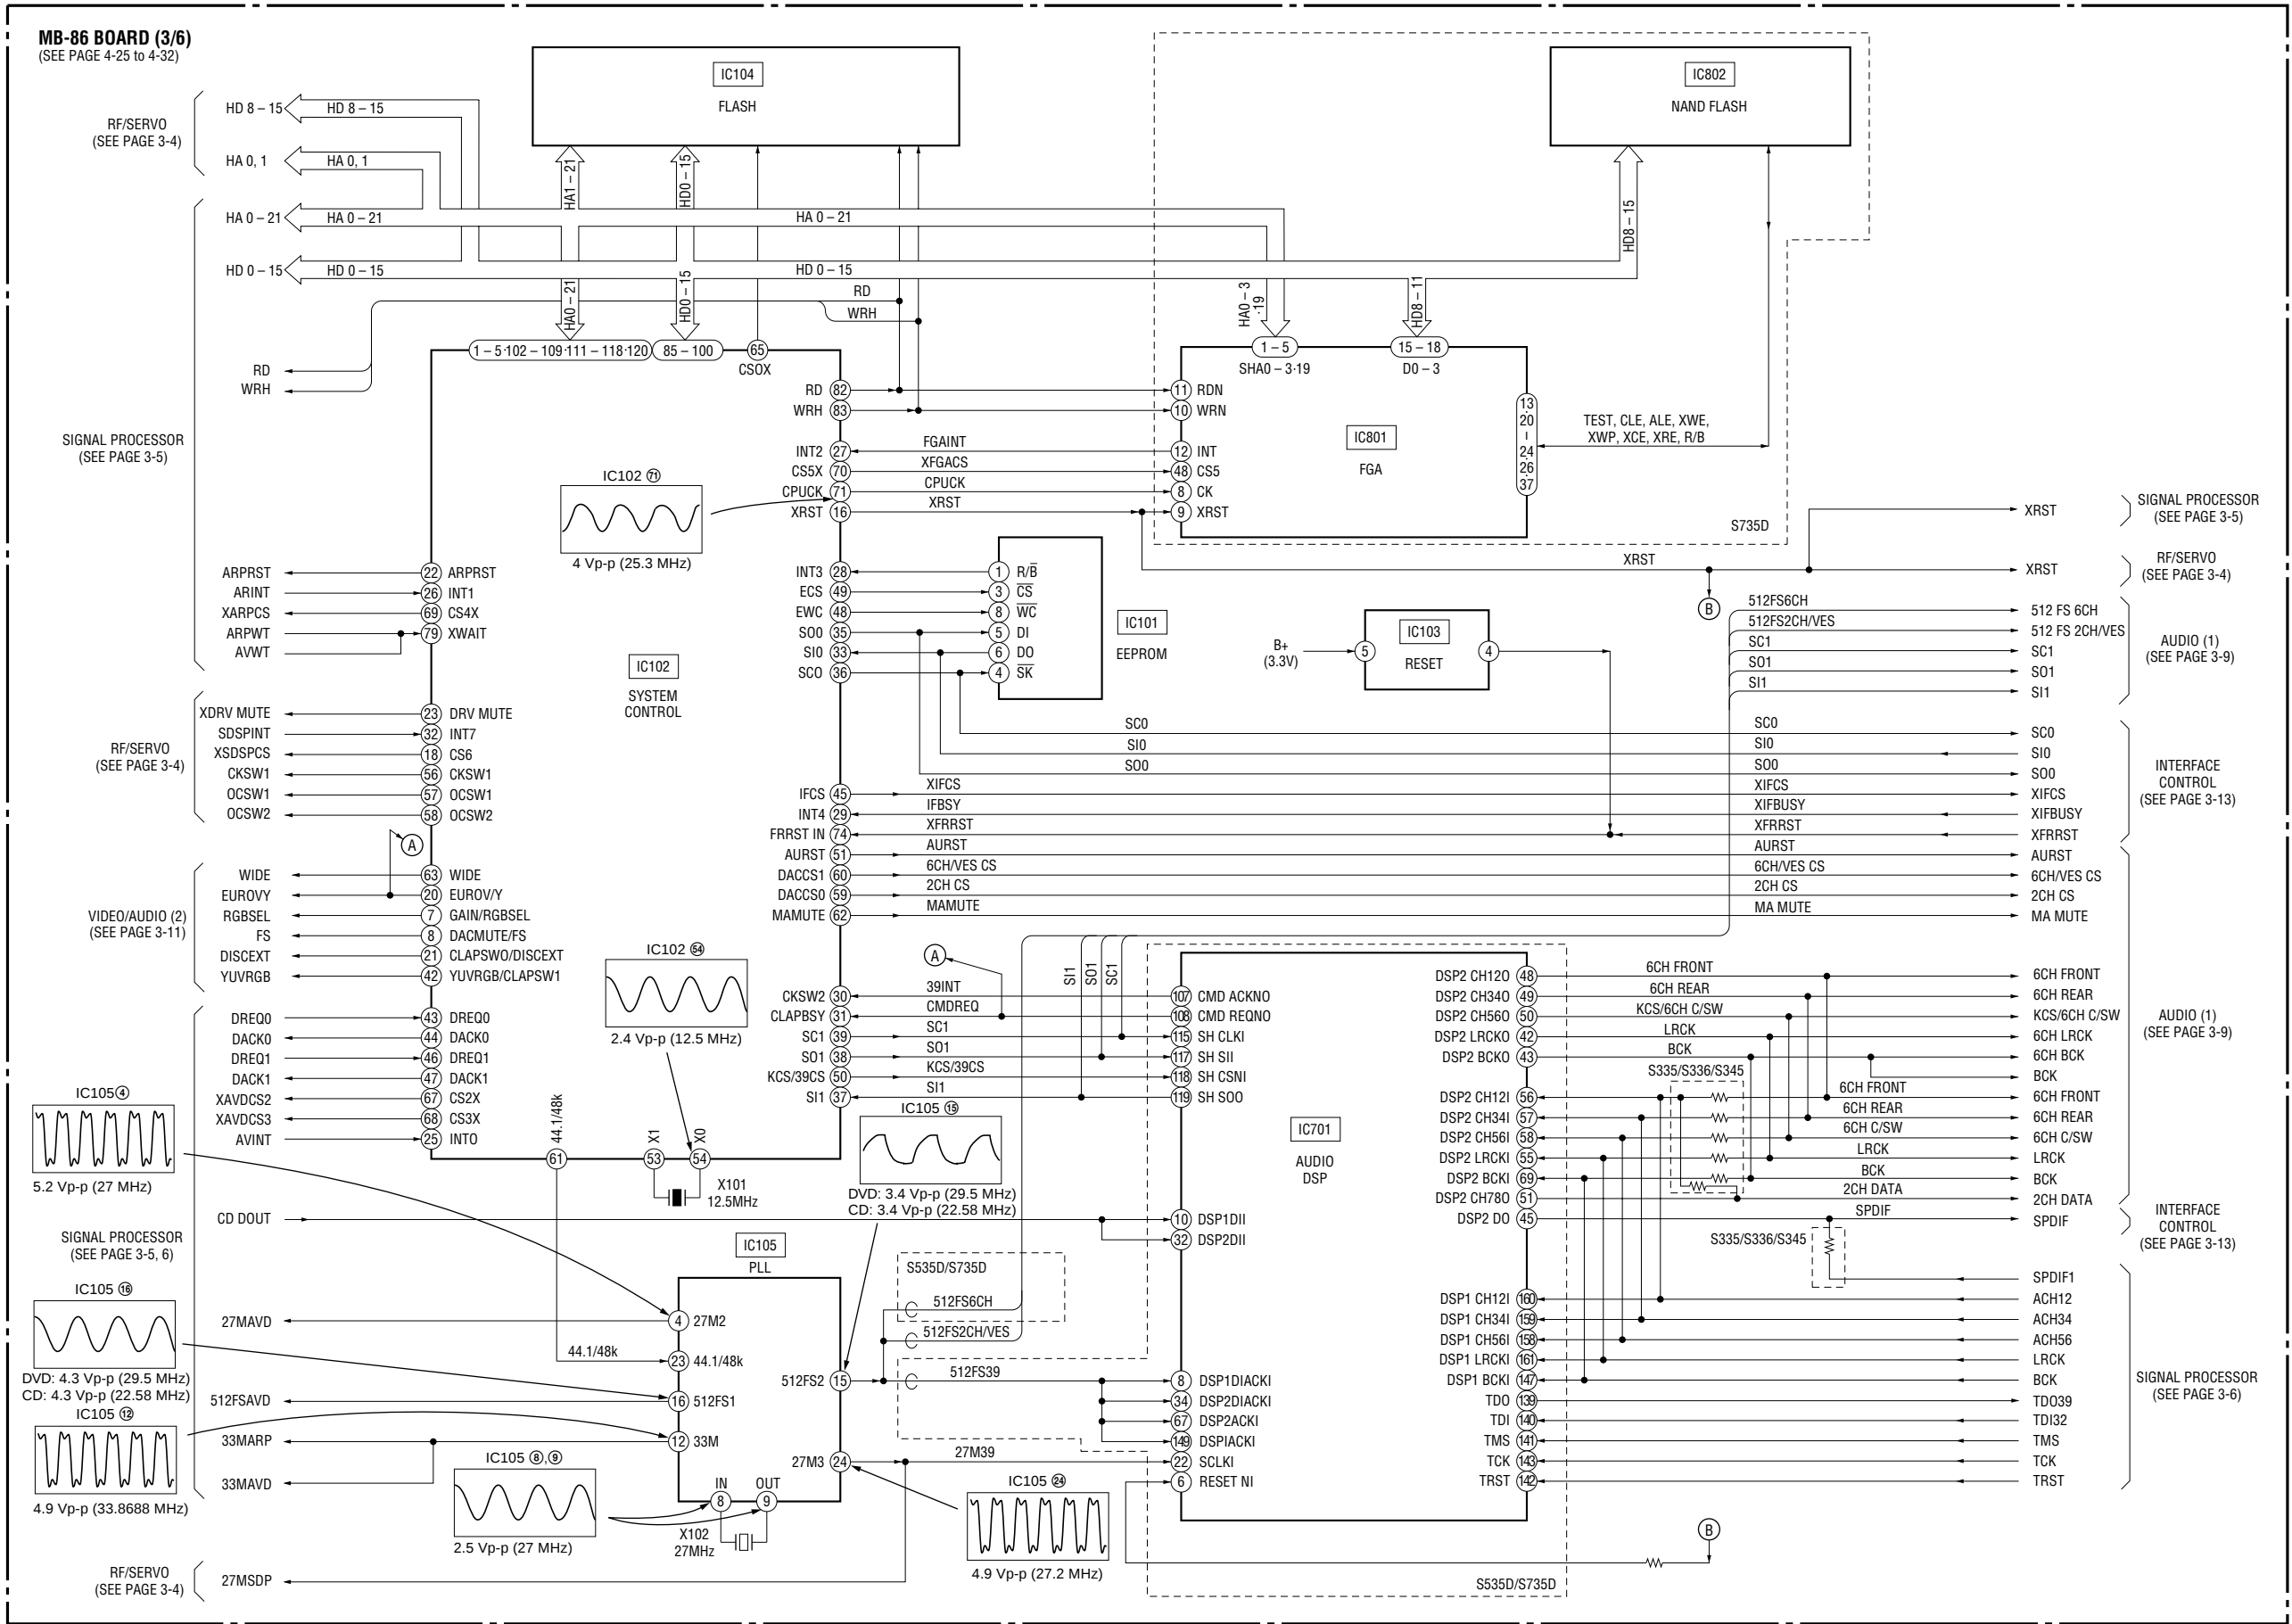


3-5. AUDIO (1) BLOCK DIAGRAM

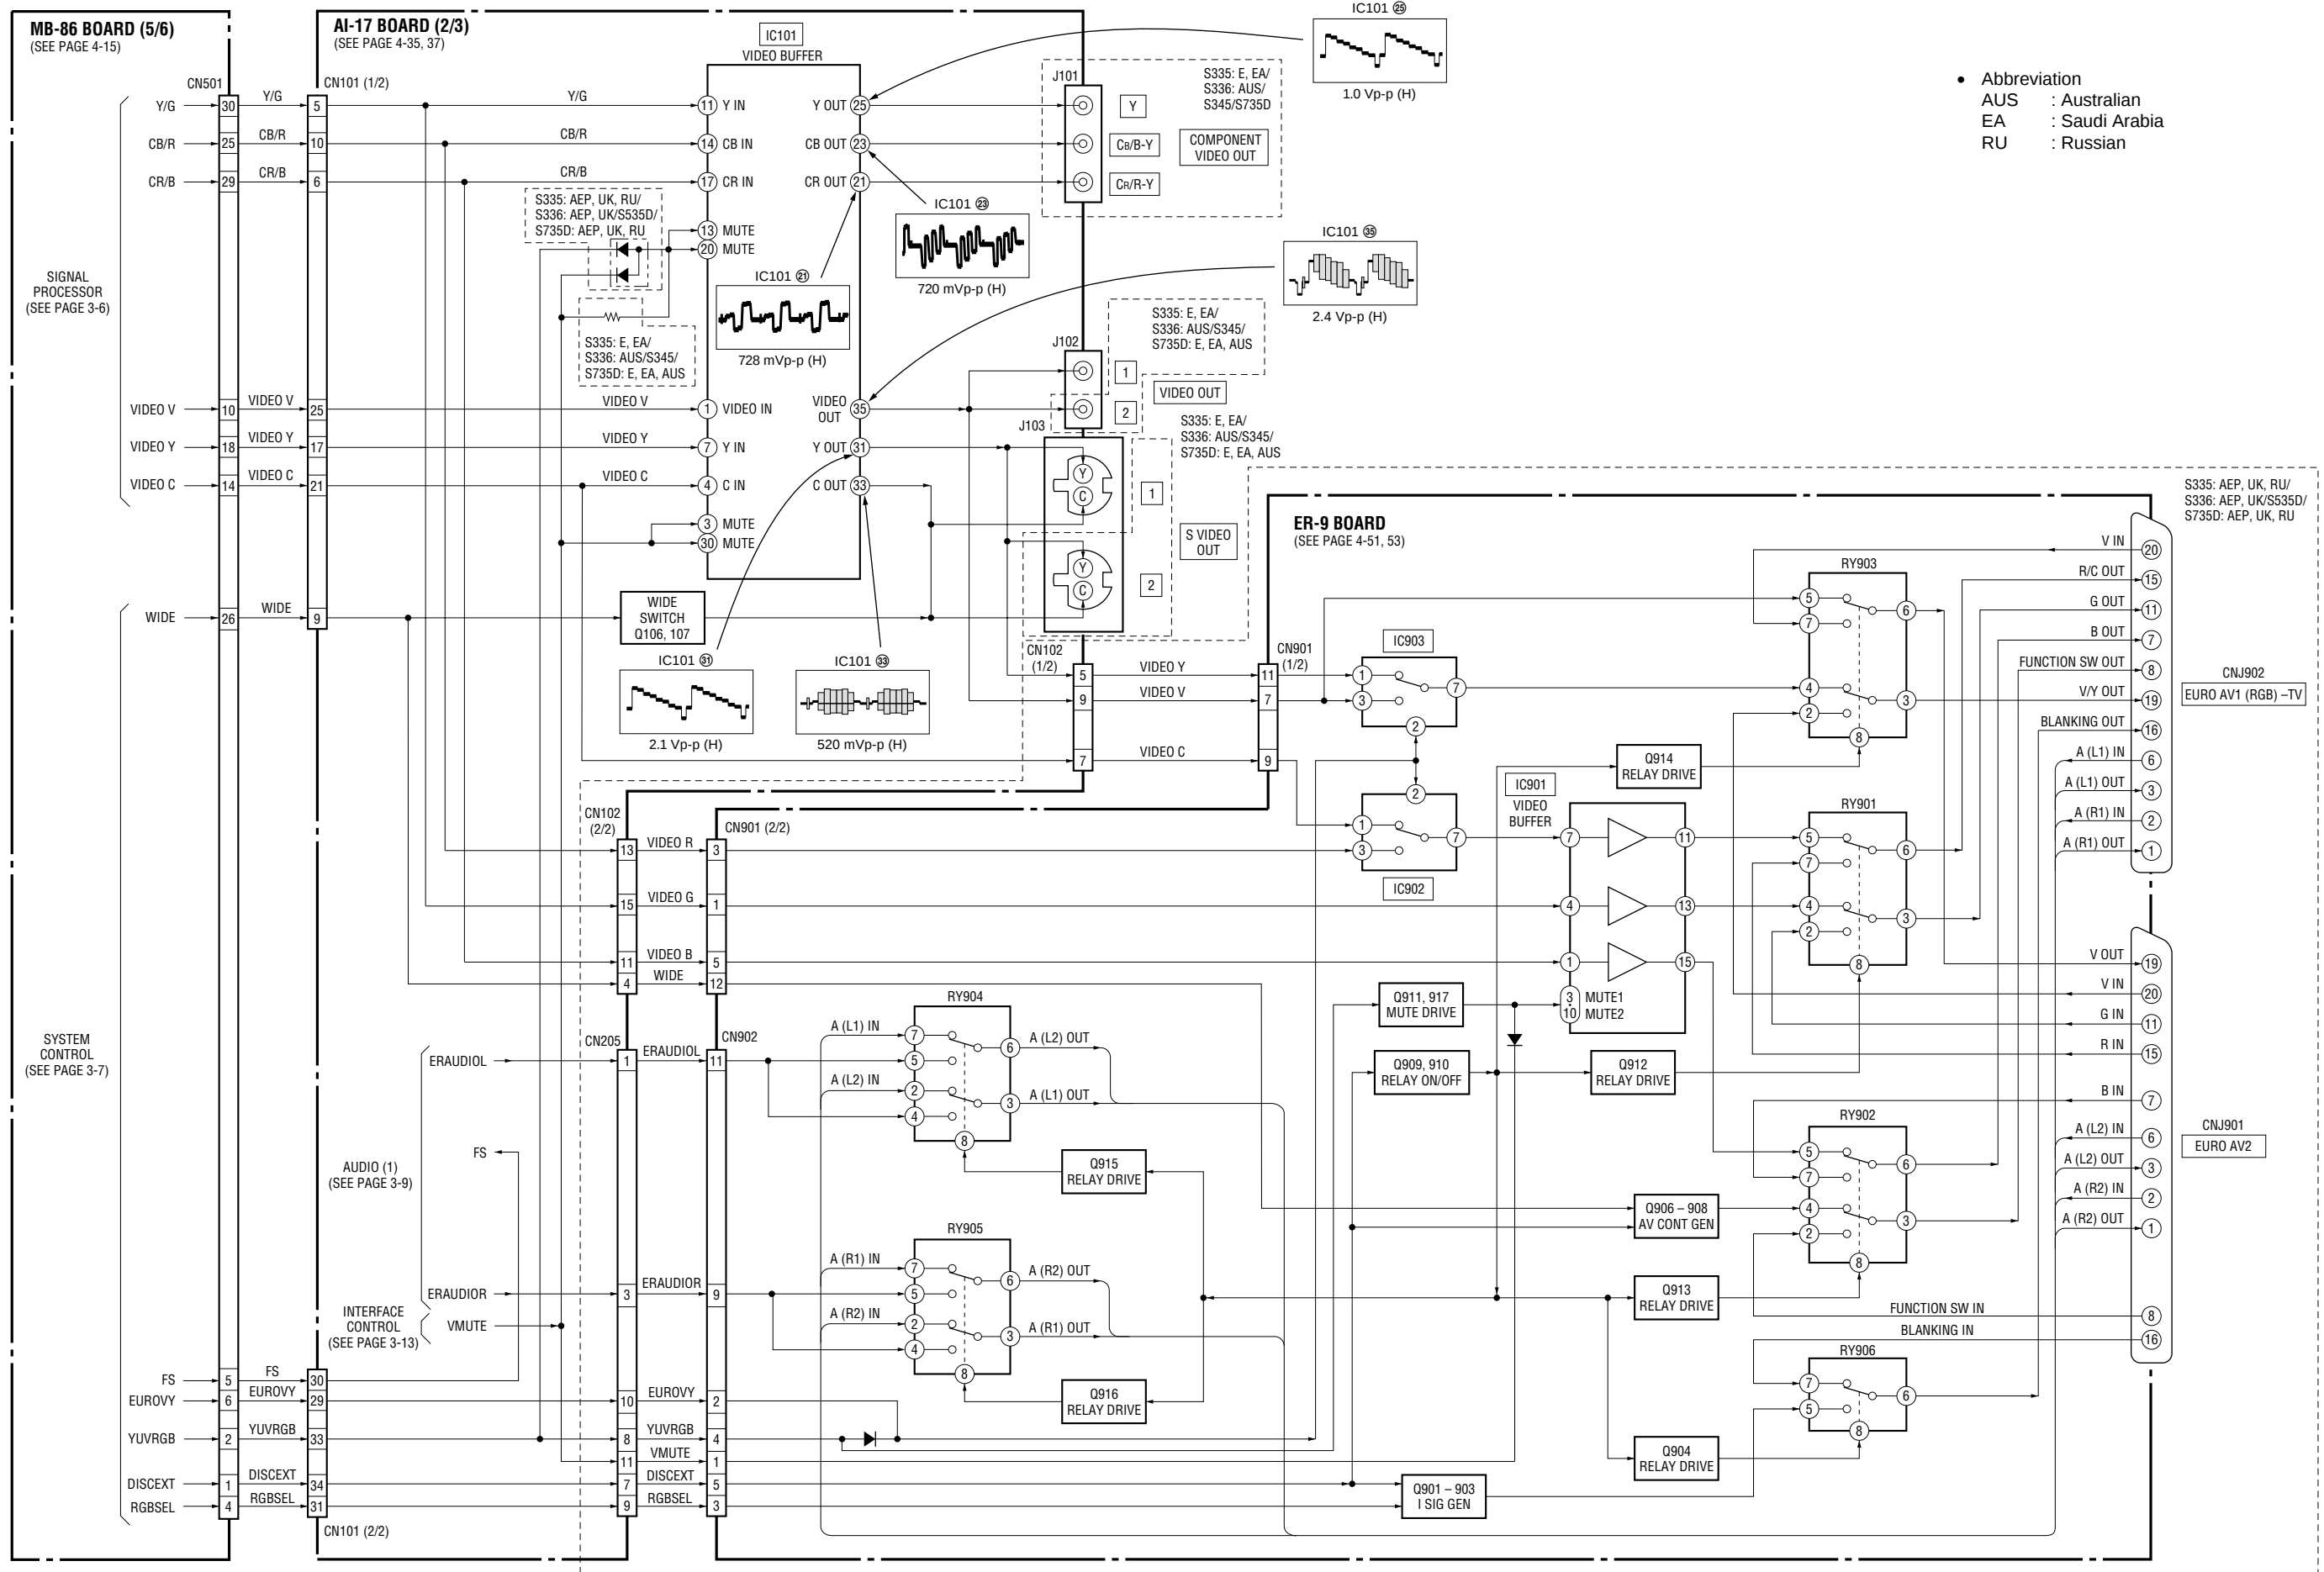

3-6. VIDEO/AUDIO (2) BLOCK DIAGRAM

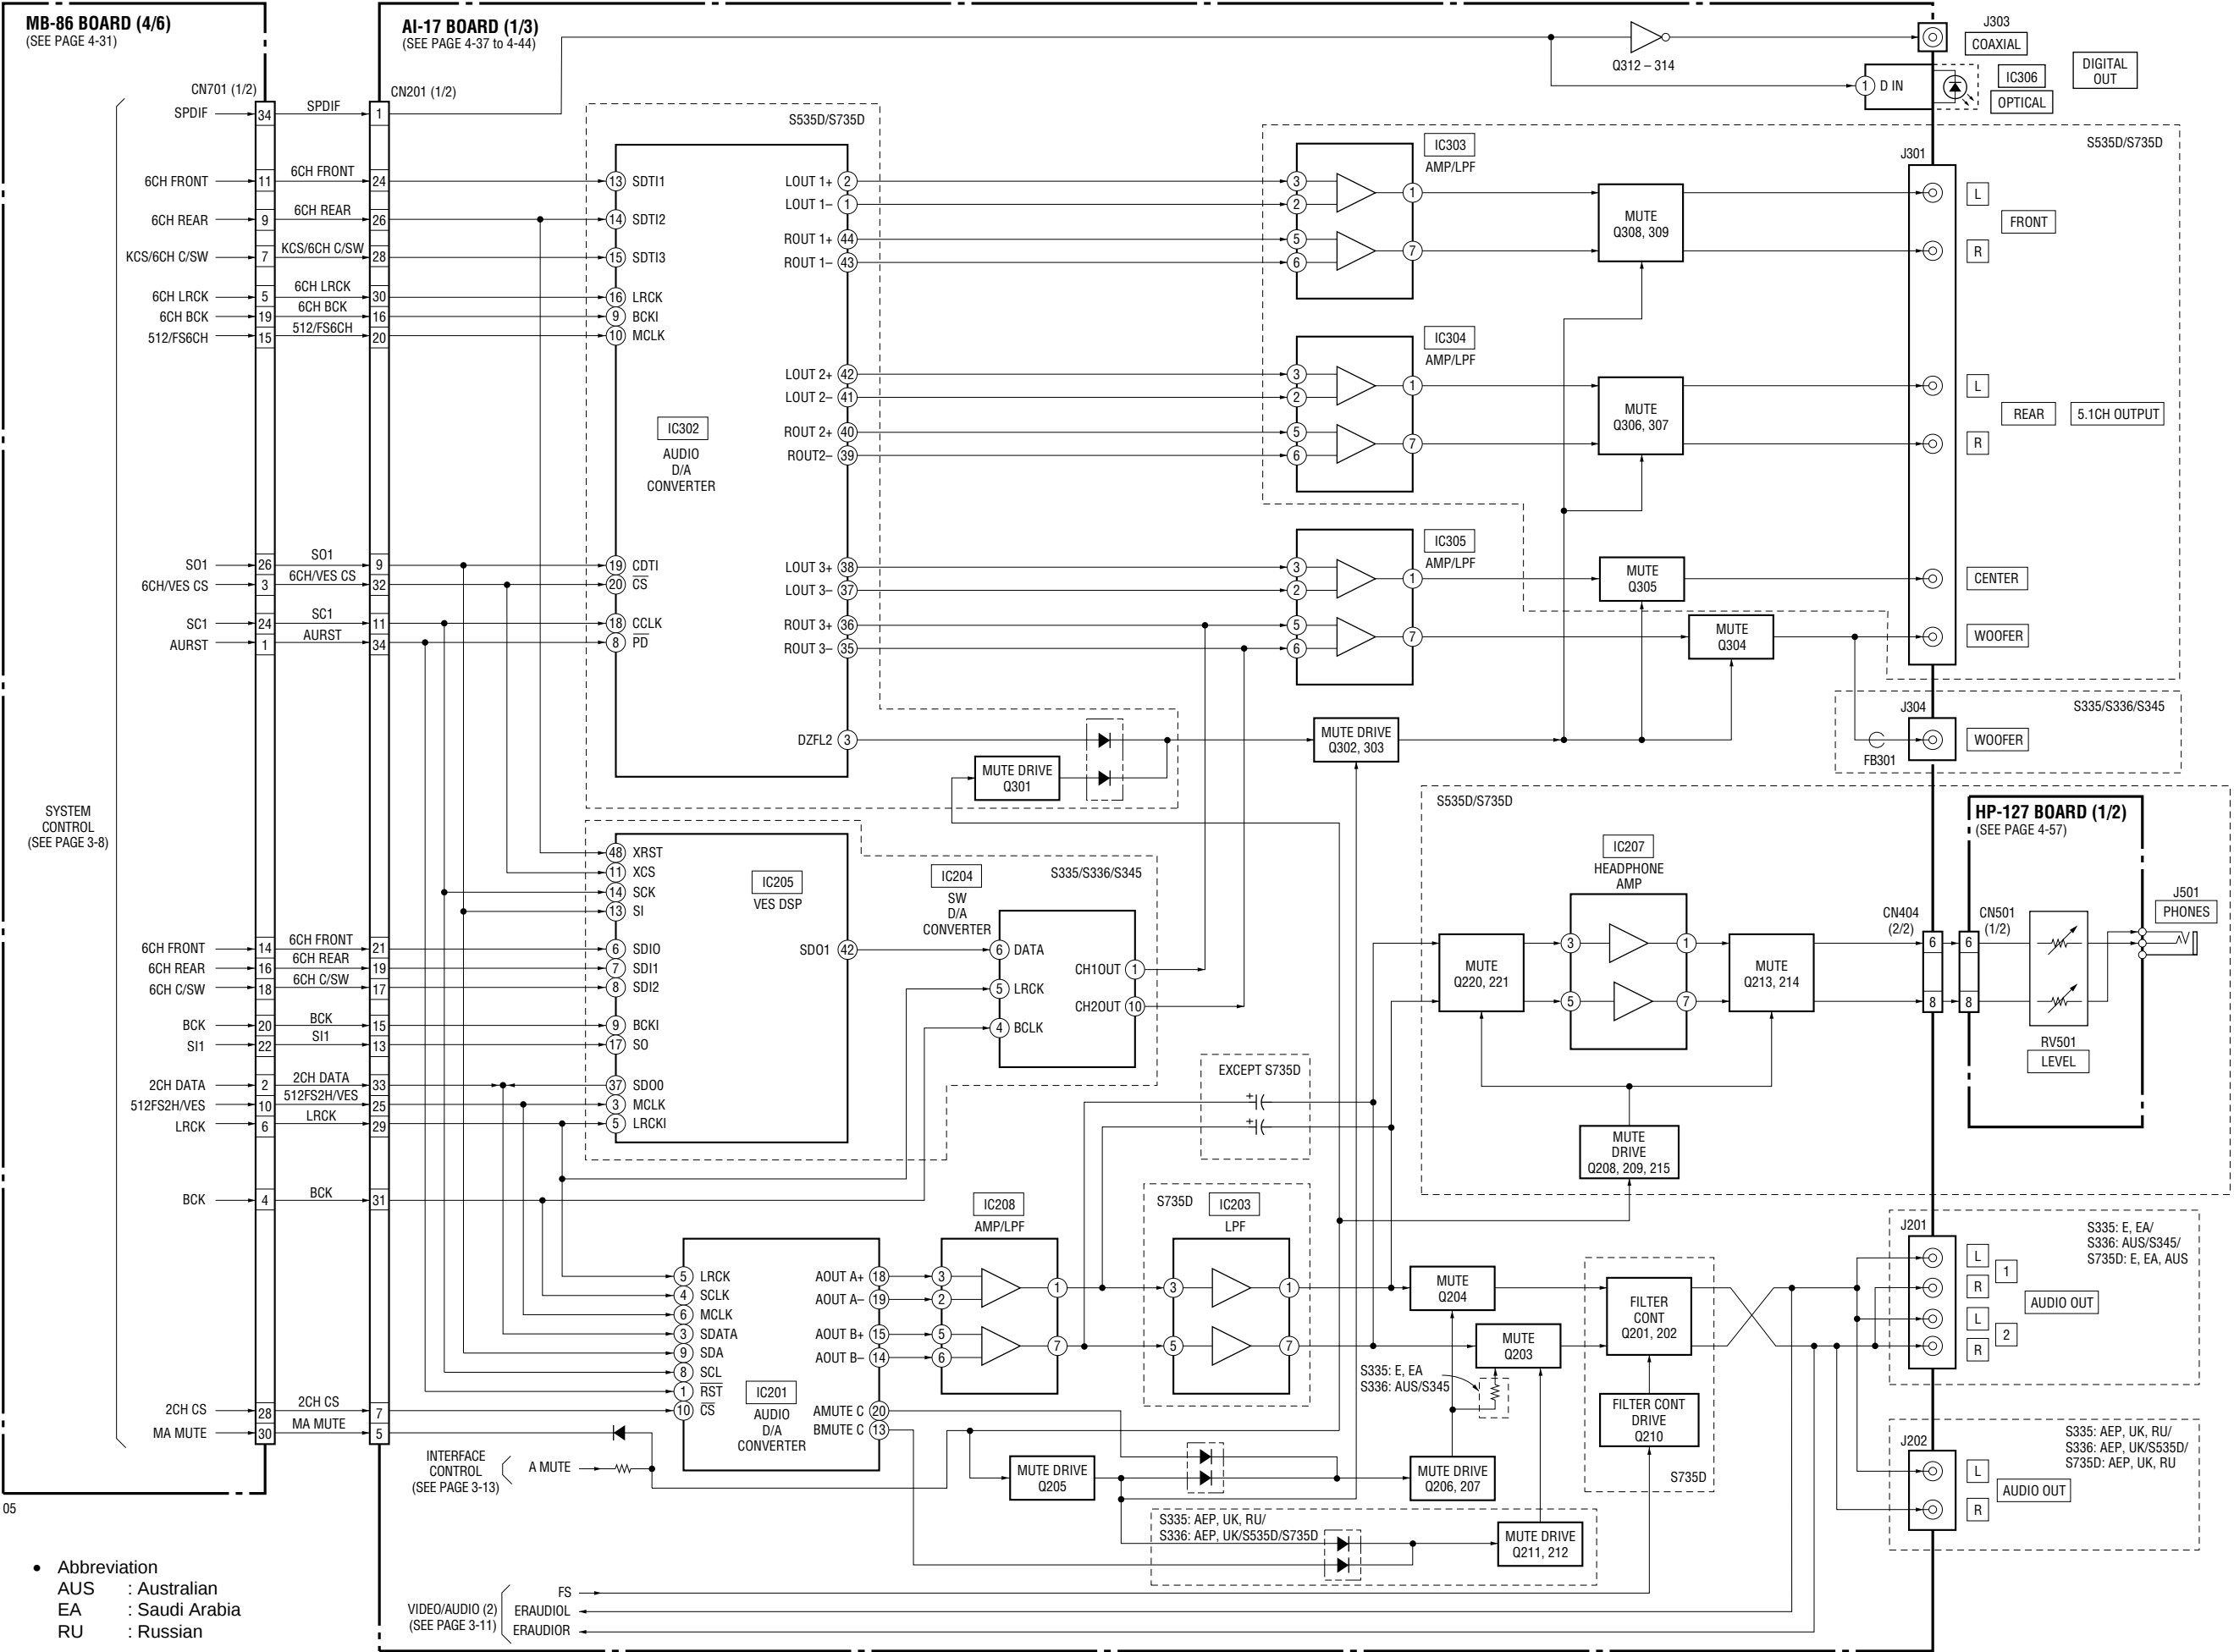


3-7. INTERFACE CONTROL BLOCK DIAGRAM

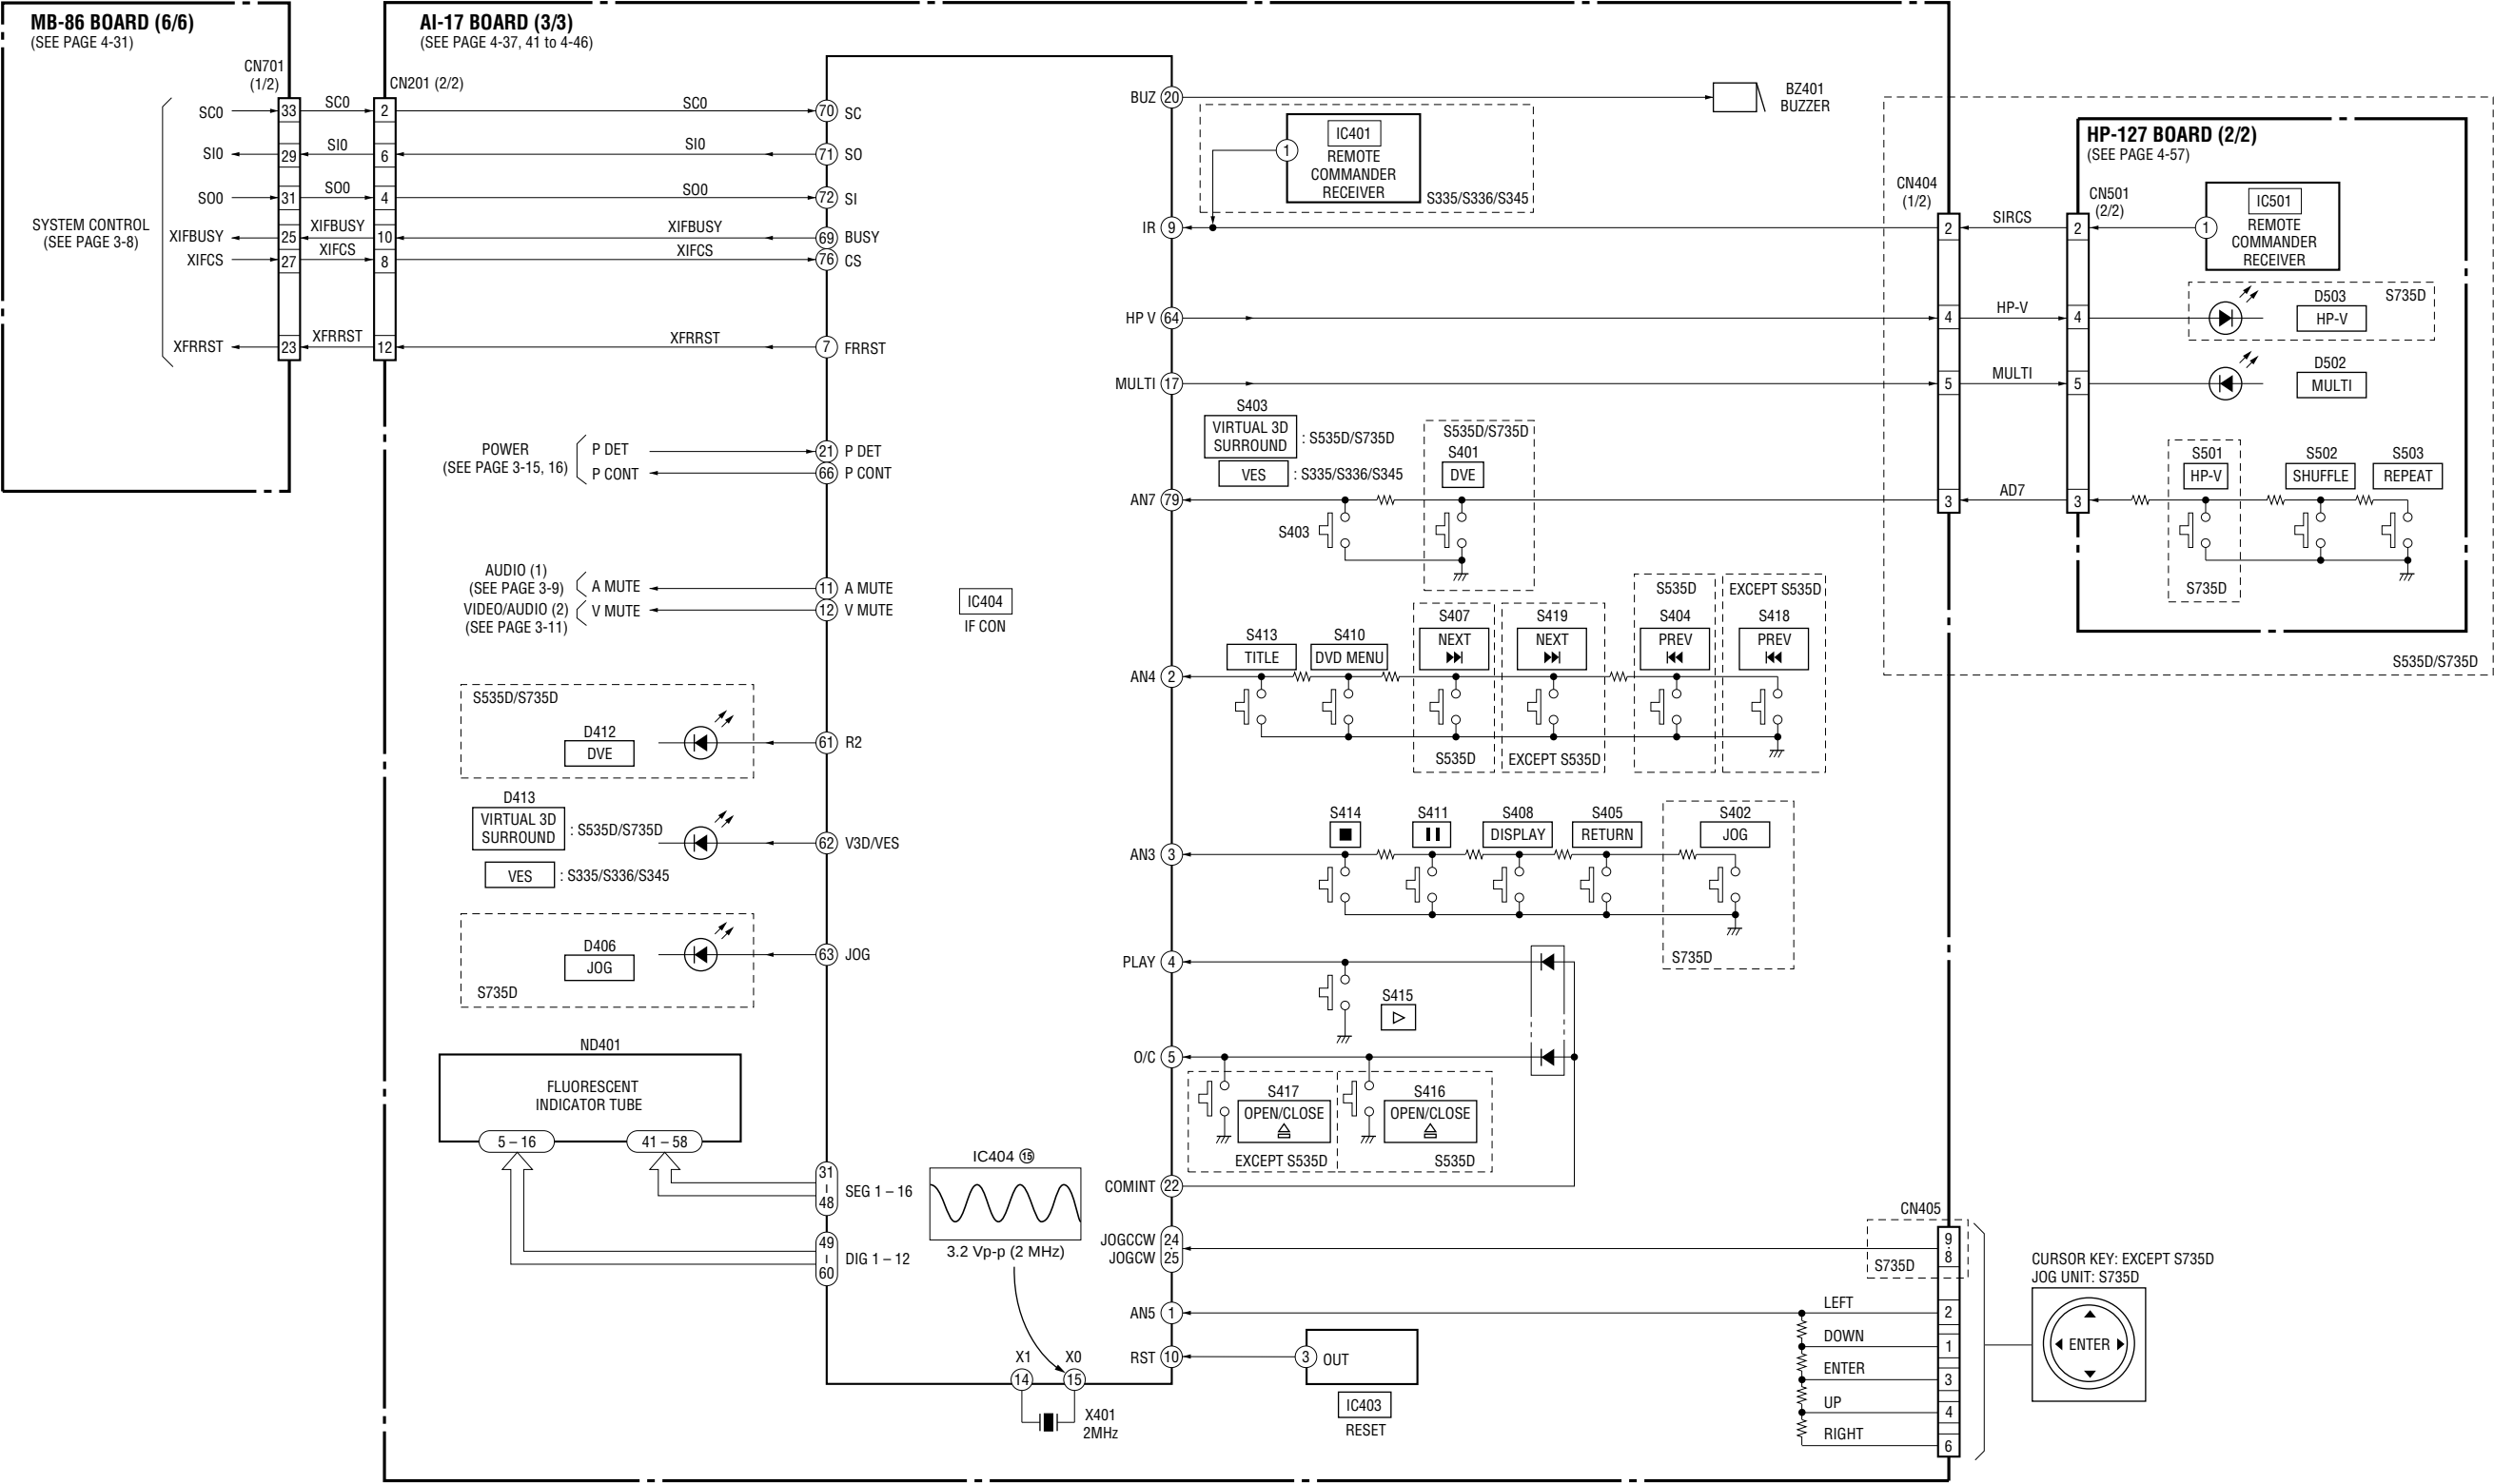

05

3-8. POWER BLOCK DIAGRAM

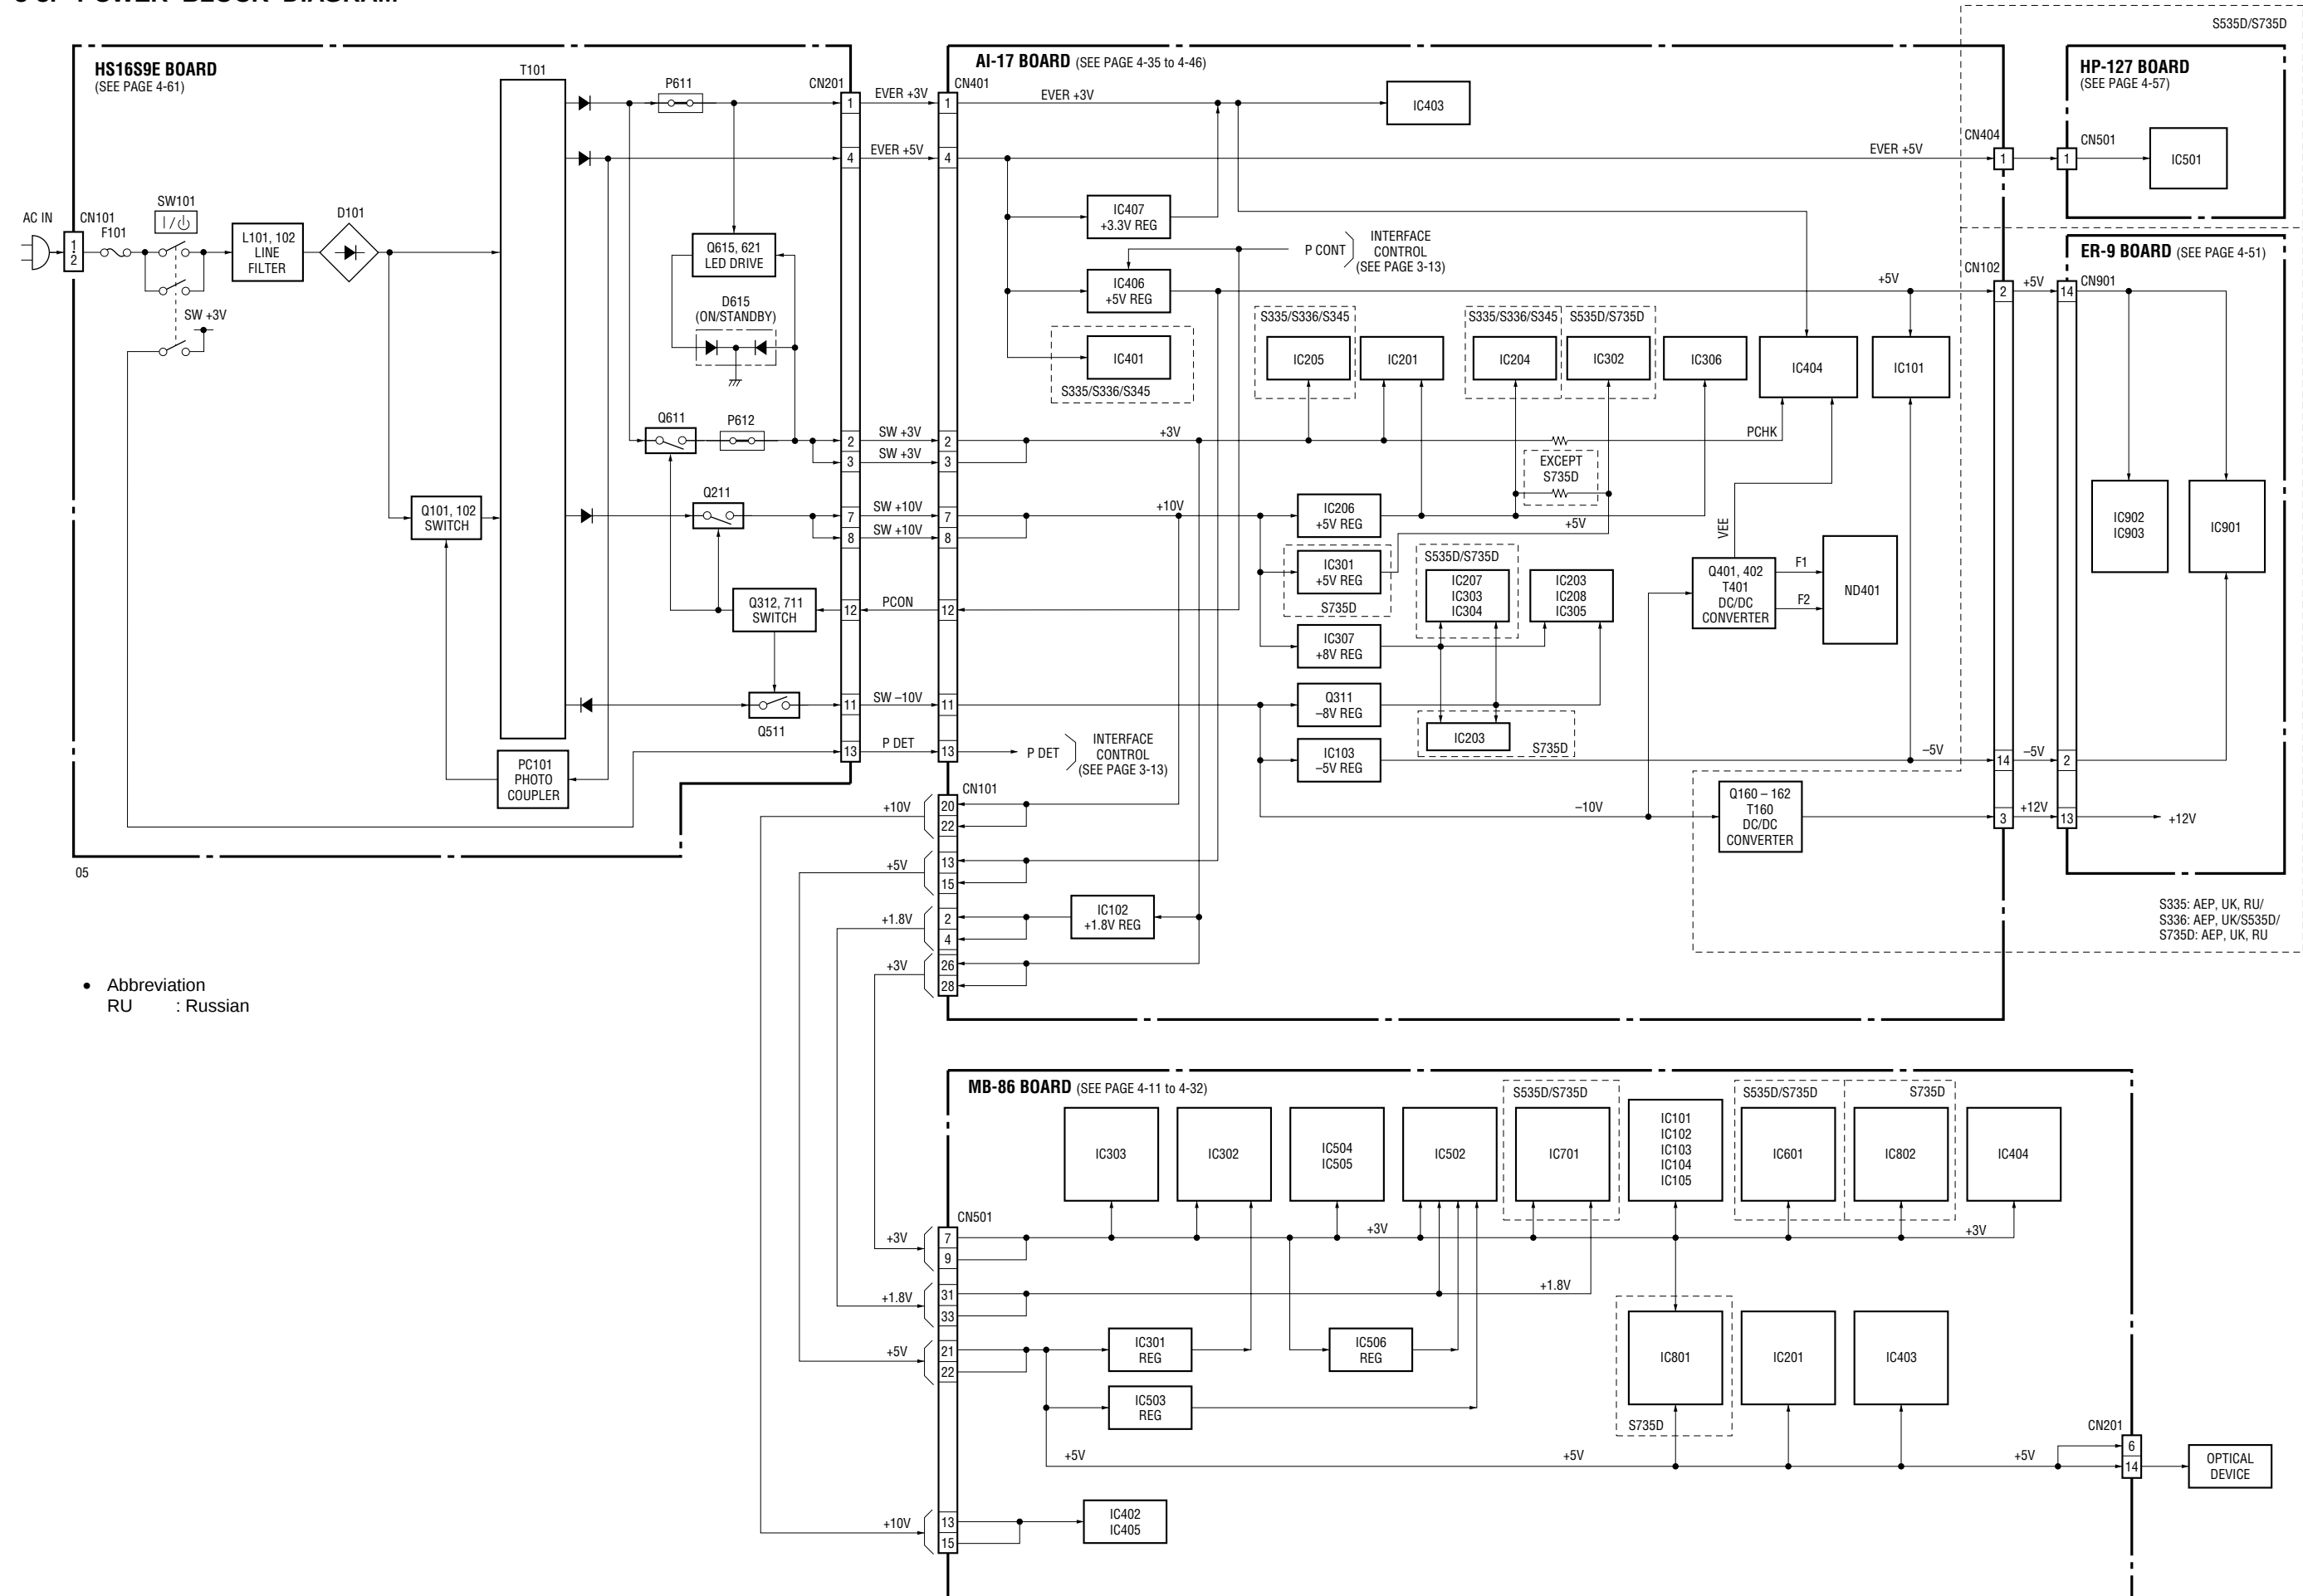

SECTION 4

PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

THIS NOTE IS COMMON FOR PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS.
(In addition to this, the necessary mote is printed in each block.)

For printed wiring boards:

- — : indicates a lead wire mounted on the component side.
- — : indicates a lead wire mounted on the printed side.
- : Through hole.
- ▨ : Pattern from the side which enables seeing.
(The other layers' patterns are not indicated.)

Caution:

Pattern face side: (Side B)	Parts on the pattern face side seen from the pattern face are indicated.
Parts face side: (Side A)	Parts on the parts face side seen from the parts face are indicated.

- Abbreviation
AUS : Australian
EA : Saudi Arabia
RU : Russian

For schematic Diagram:


- Caution when replacing chip parts.
New parts must be attached after removal of chip.
Be careful not to heat the minus side of tantalum capacitor, because it is damaged by the heat.
- All resistors are in ohms, $\frac{1}{4}$ W (Chip resistors : $\frac{1}{10}$ W) unless otherwise specified.
k Ω : 1000 Ω , M Ω : 1000k Ω .
- All capacitors are in μ F unless otherwise noted. pF : μ μ F
50V or less are not indicated except for electrolytics and tantalums.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
-  : nonflammable resistor.
-  : fusible resistor.
-  : panel designation.
- Δ : internal component.
-  : adjustment for repair.
-  : B+ Line.
-  : B- Line.
- Circled numbers refer to waveforms.
- Voltages are dc between measurement point.
- Readings are taken with a color-bar signals on DVD reference disc and when playing CD reference disc.
- Readings are taken with a digital multimeter (DC 10M Ω).
- Voltage variations may be noted due to normal production tolerances.

Note: The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

When indicating parts by reference number, please include the board name.

- Abbreviation
AUS : Australian
EA : Saudi Arabia
RU : Russian
- Description about destination (AEP model)
AEP50
↑ This number indicates the suffix number of its “model code”.

4-1. FRAME SCHEMATIC DIAGRAM



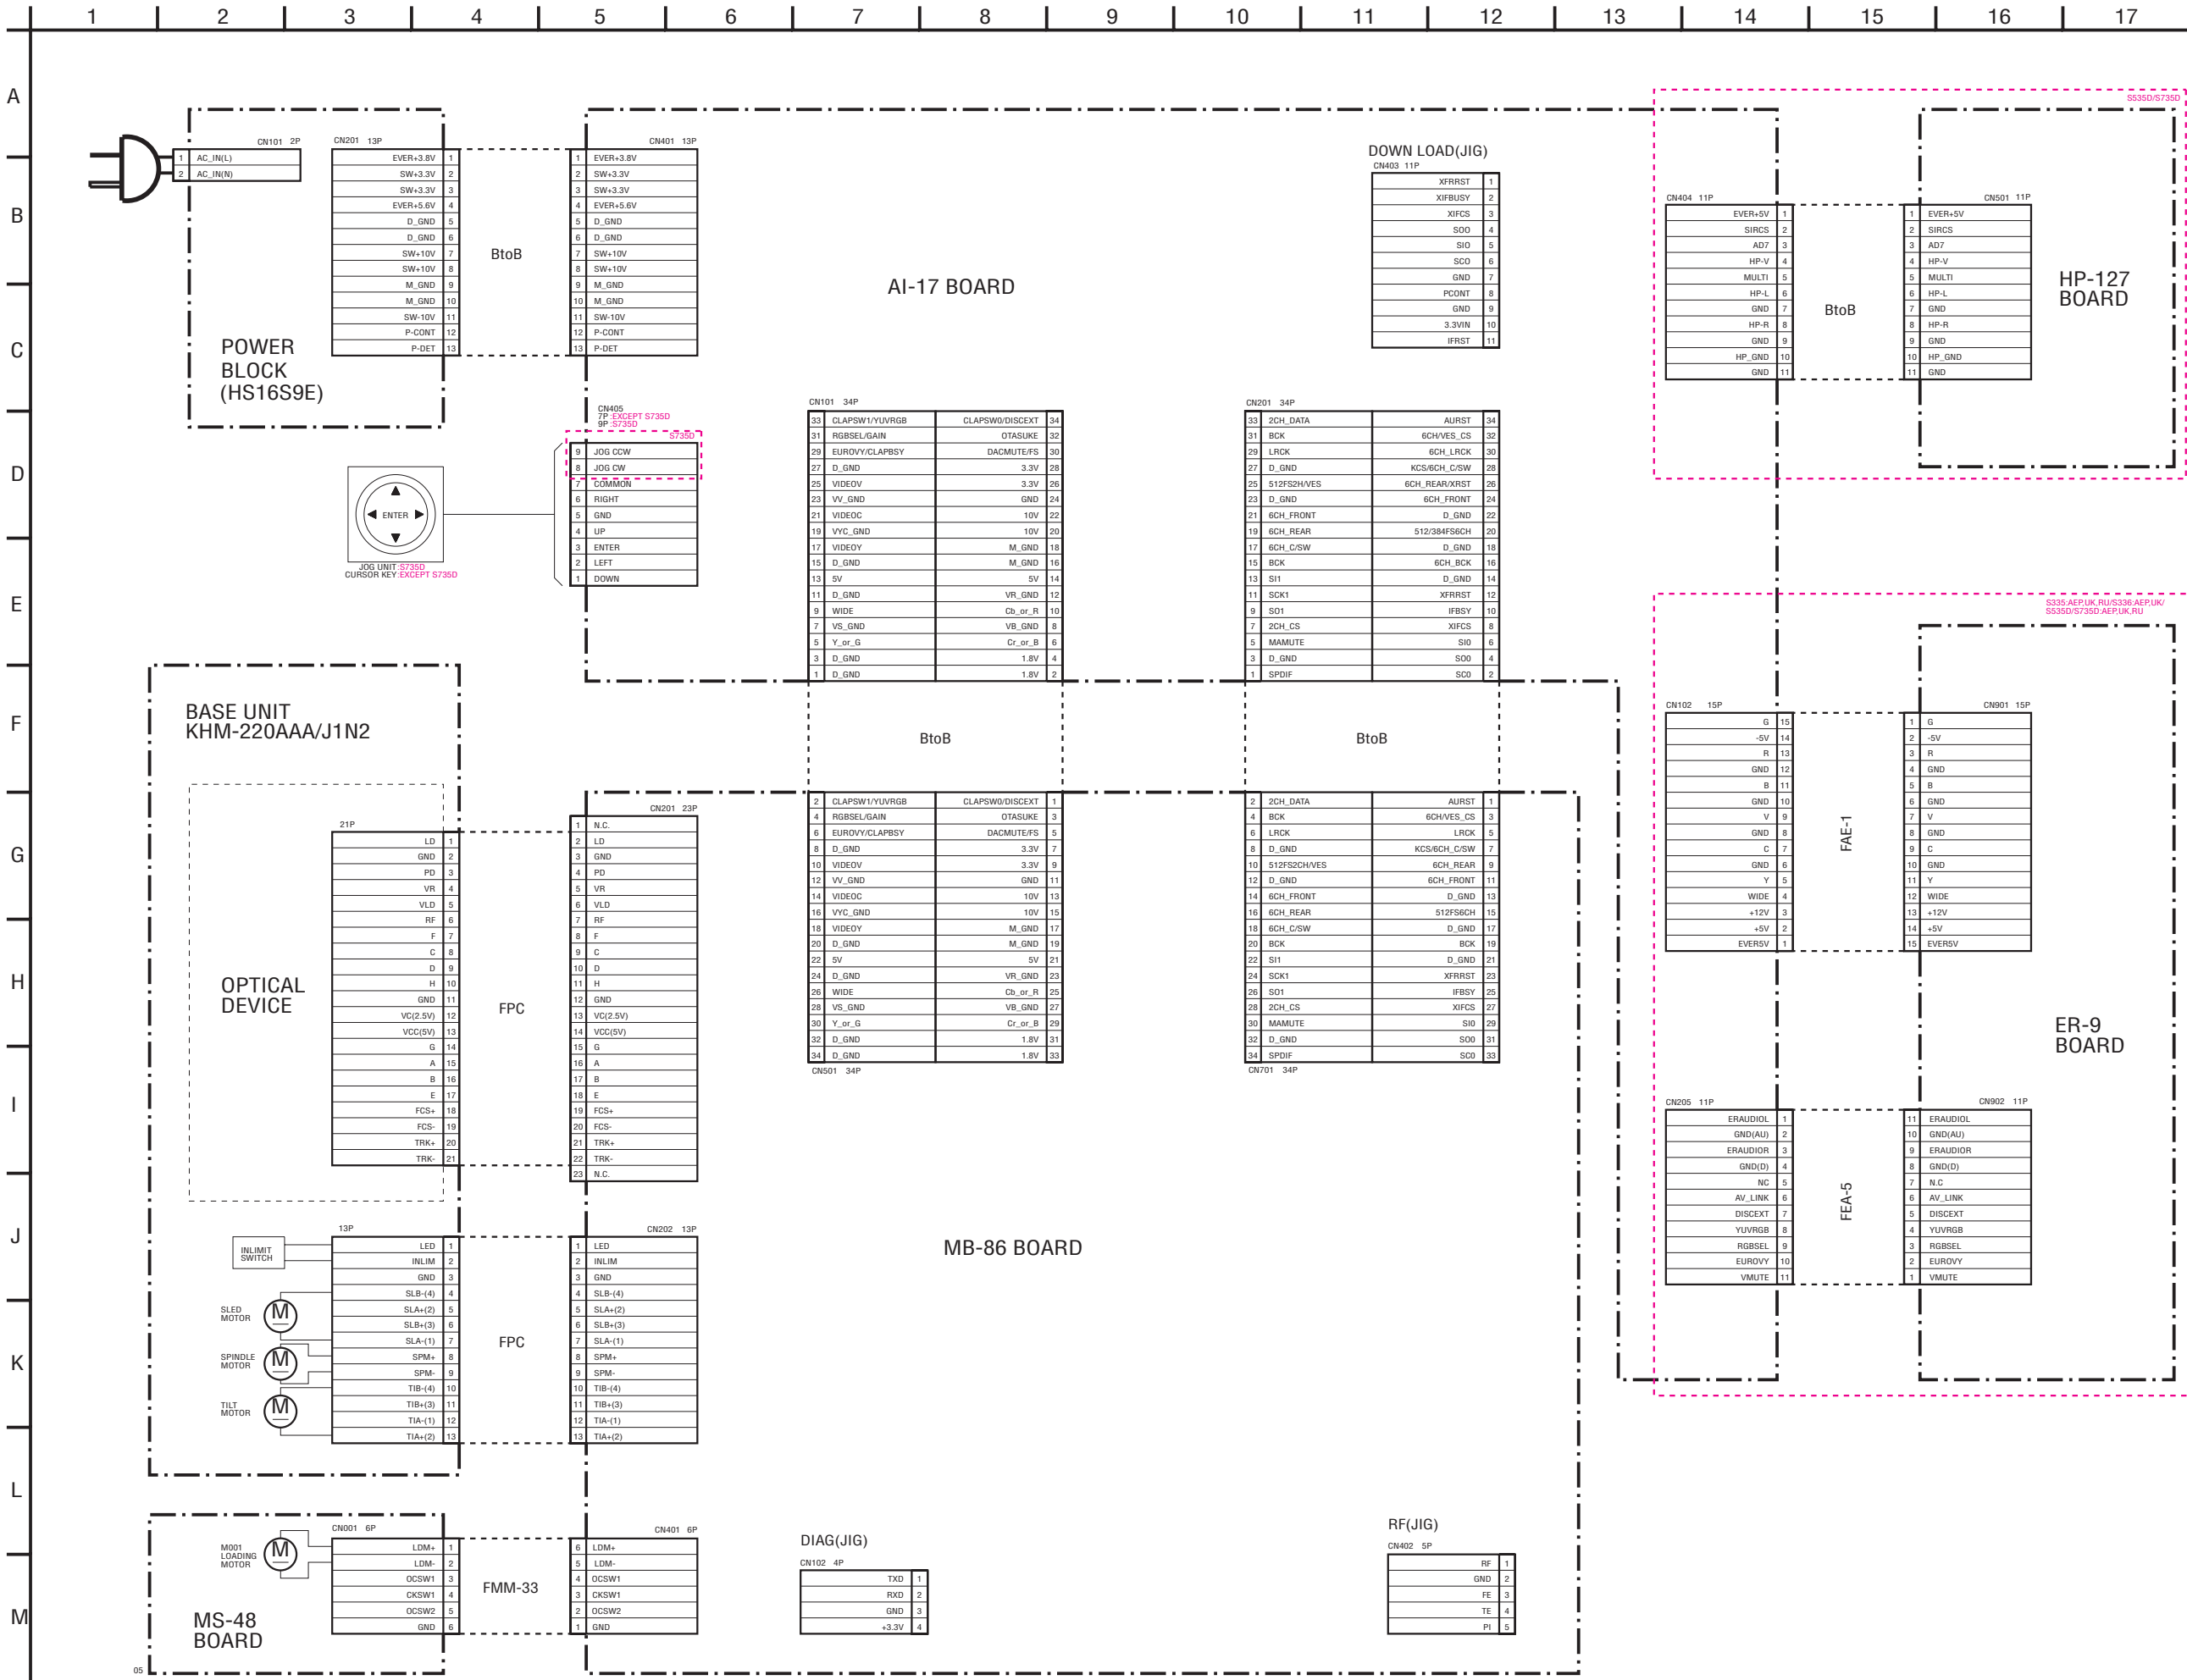


4-2. PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

MS-48 (LOADING) PRINTED WIRING BOARD AND SCHEMATIC DIAGRAM

– Ref. No.: MS-48 board; 2,000 series –

There are few cases that the part isn't mounted in this model is printed on this diagram.

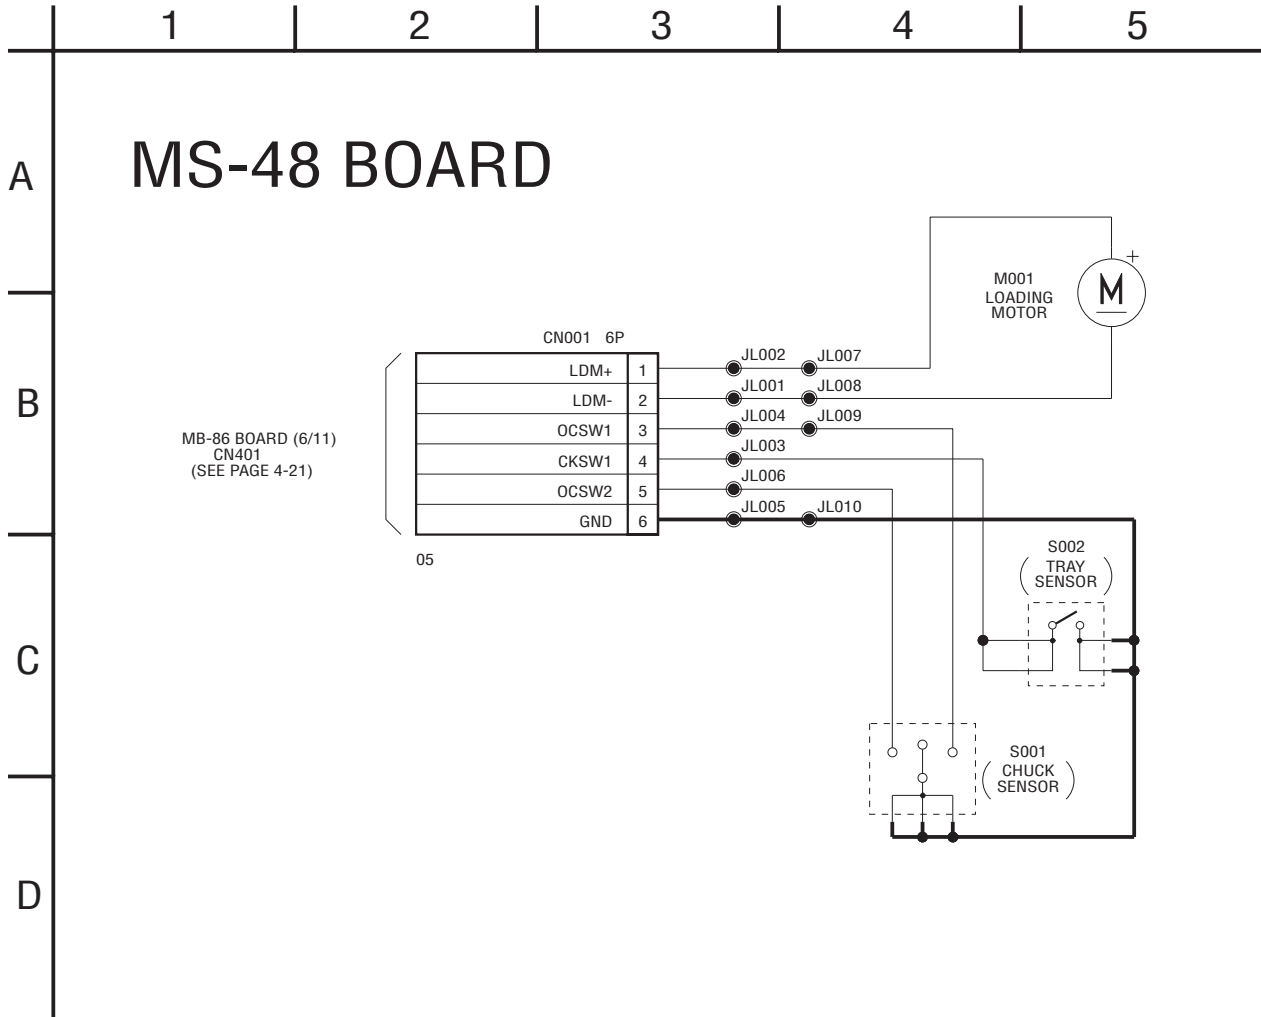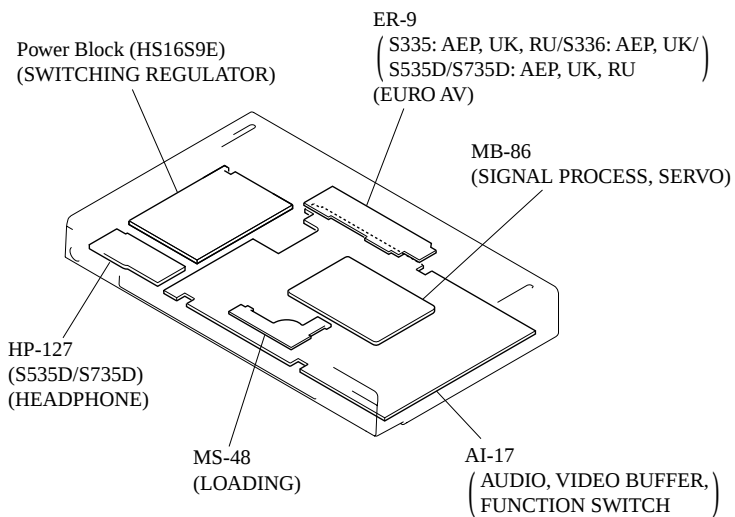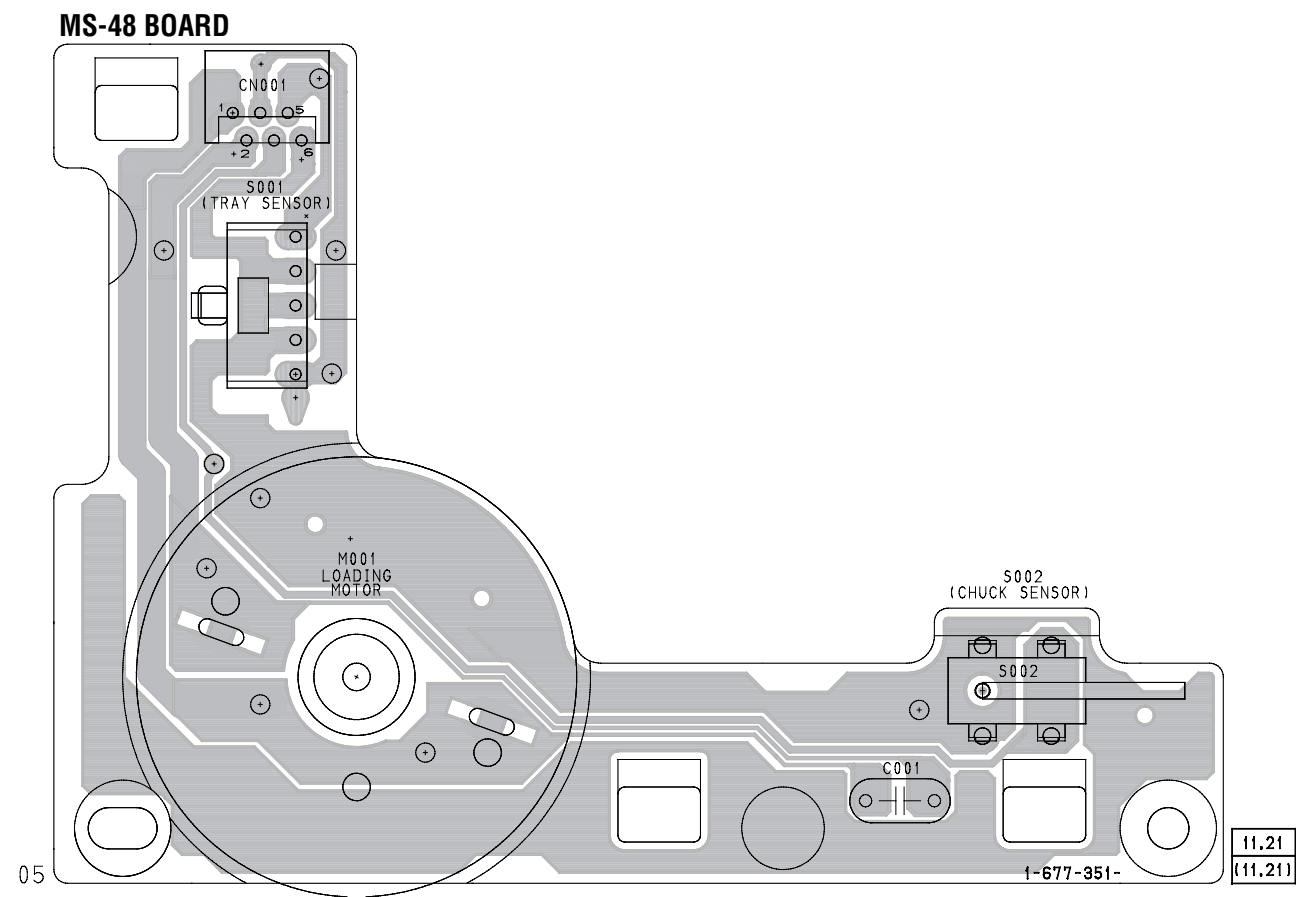



There are few cases that the part isn't mounted in this model is printed on this diagram.

MB-86 (SIGNAL PROCESS, SERVO) PRINTED WIRING BOARD
- Ref. No.: MB-86 board; 1,000 series -


MB-86 BOARD (SIDE A)

- CN102 B-1
- CN201 B-5
- CN401 A-3
- CN402 D-4
- D201 B-5
- IC101 B-2
- IC102 C-1
- IC201 B-5
- IC302 C-4
- IC404 B-4
- IC502 C-2
- IC503 D-3
- IC506 B-3
- IC701 A-2

MB-86 BOARD (SIDE A)

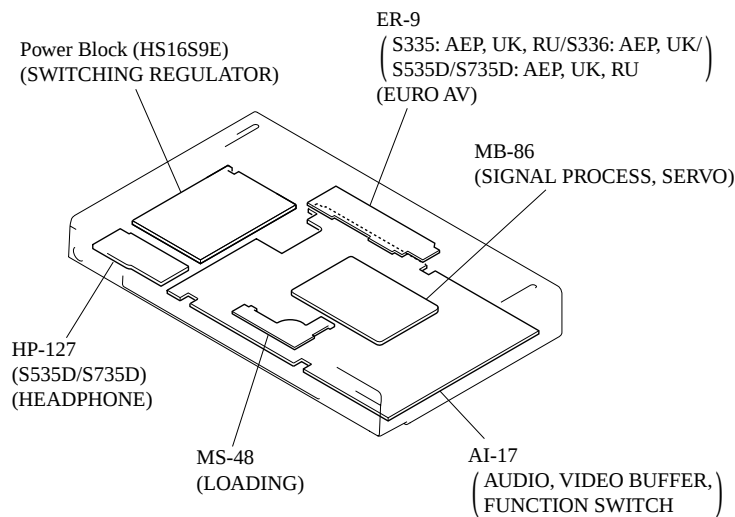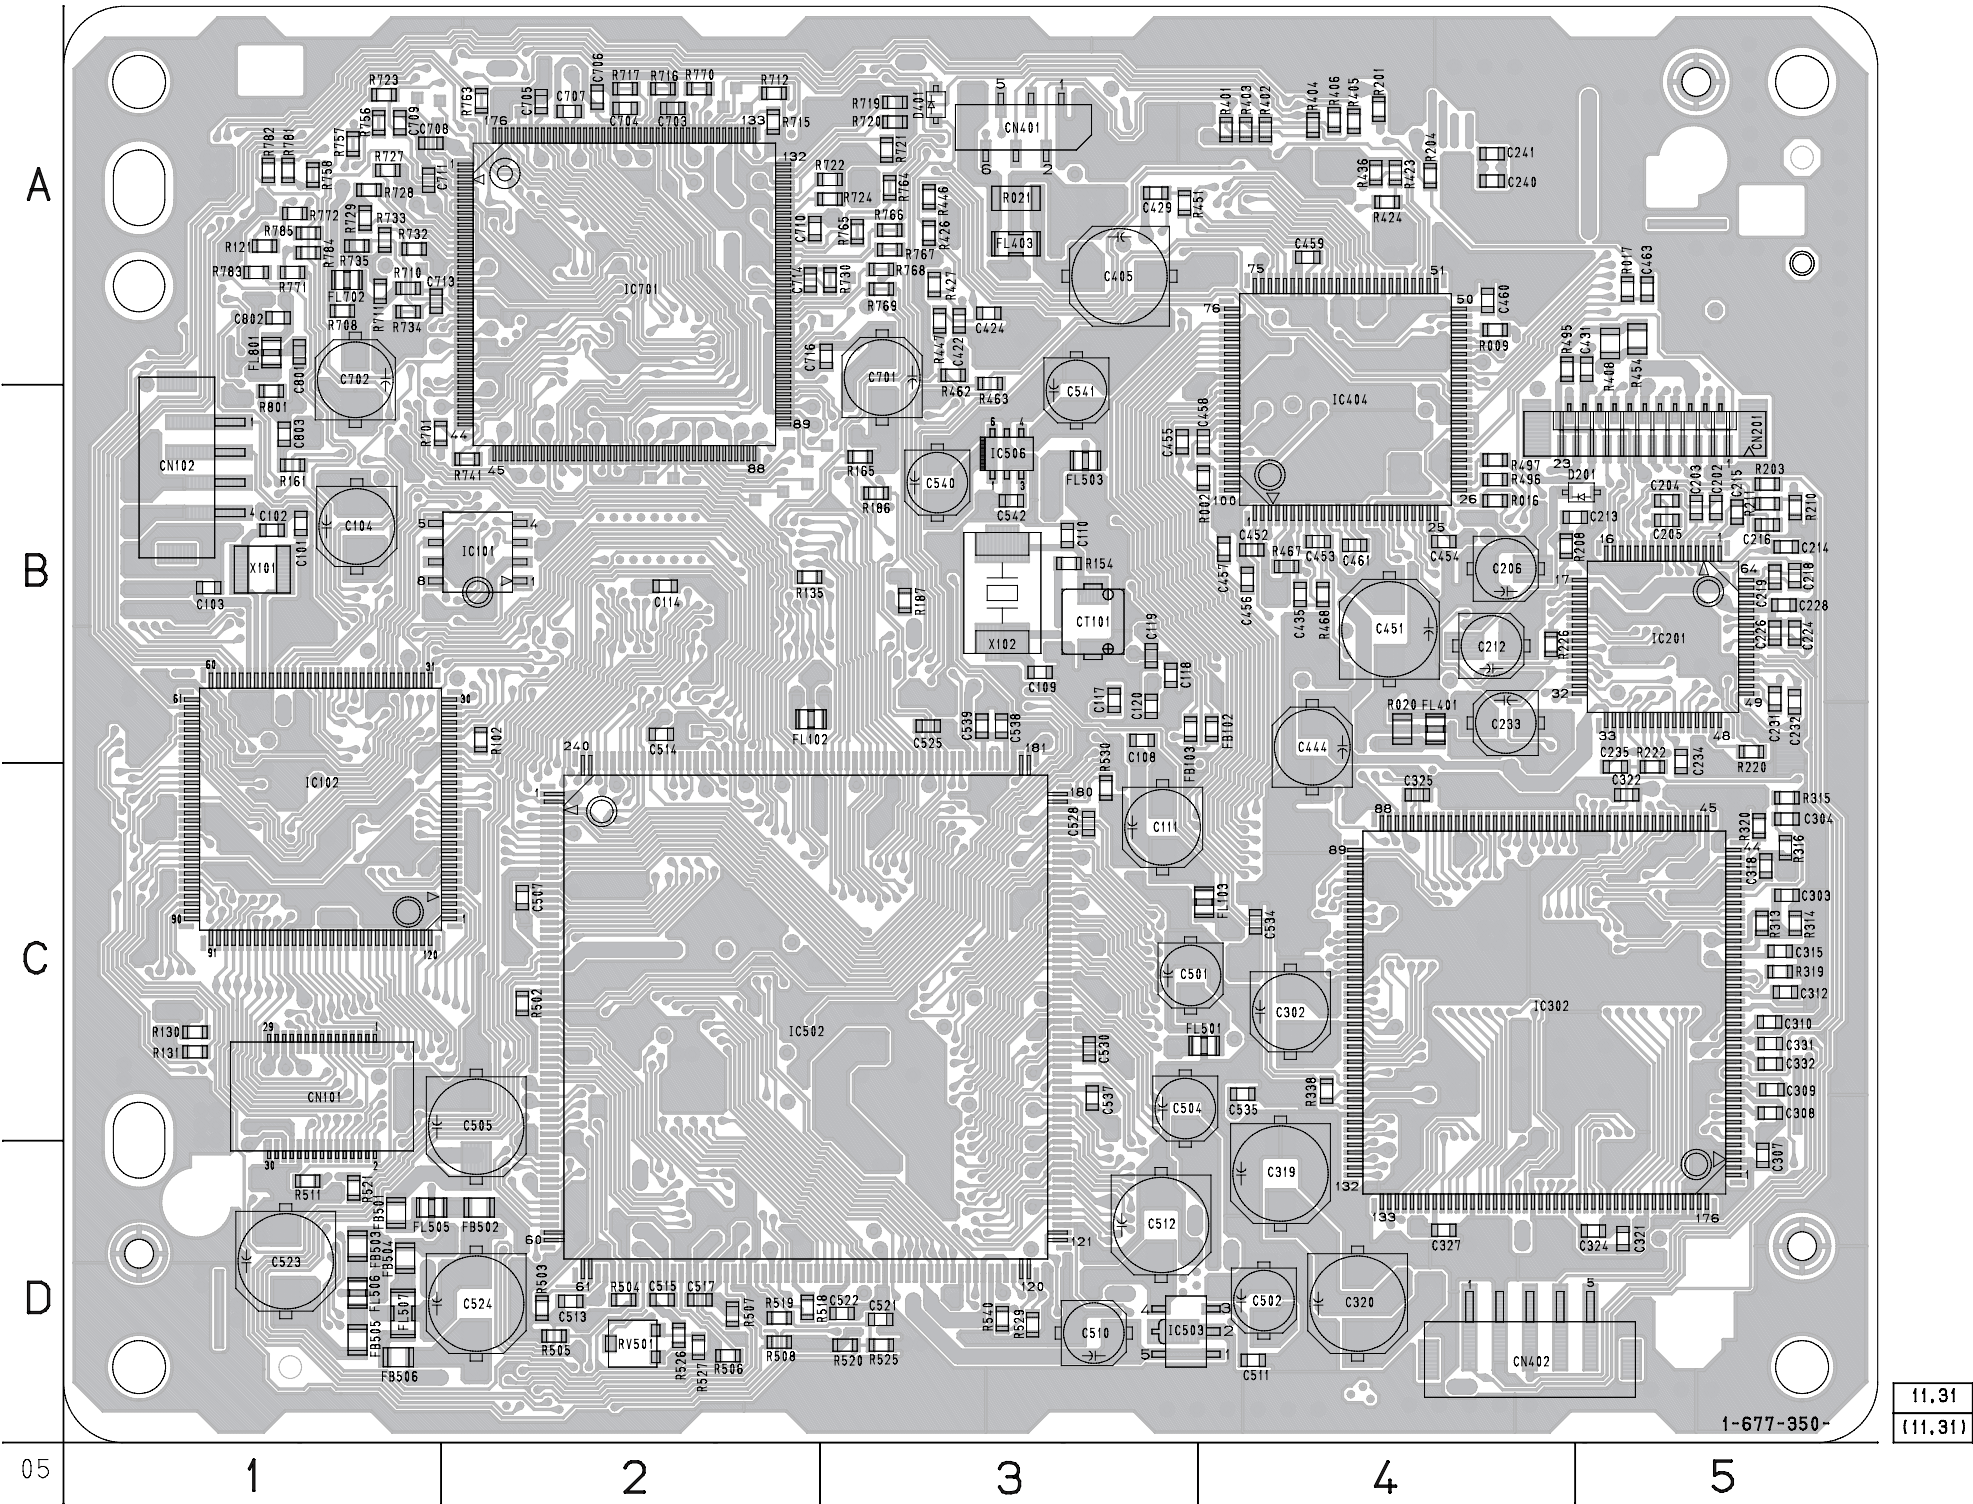

MB-86 BOARD (SIDE B)

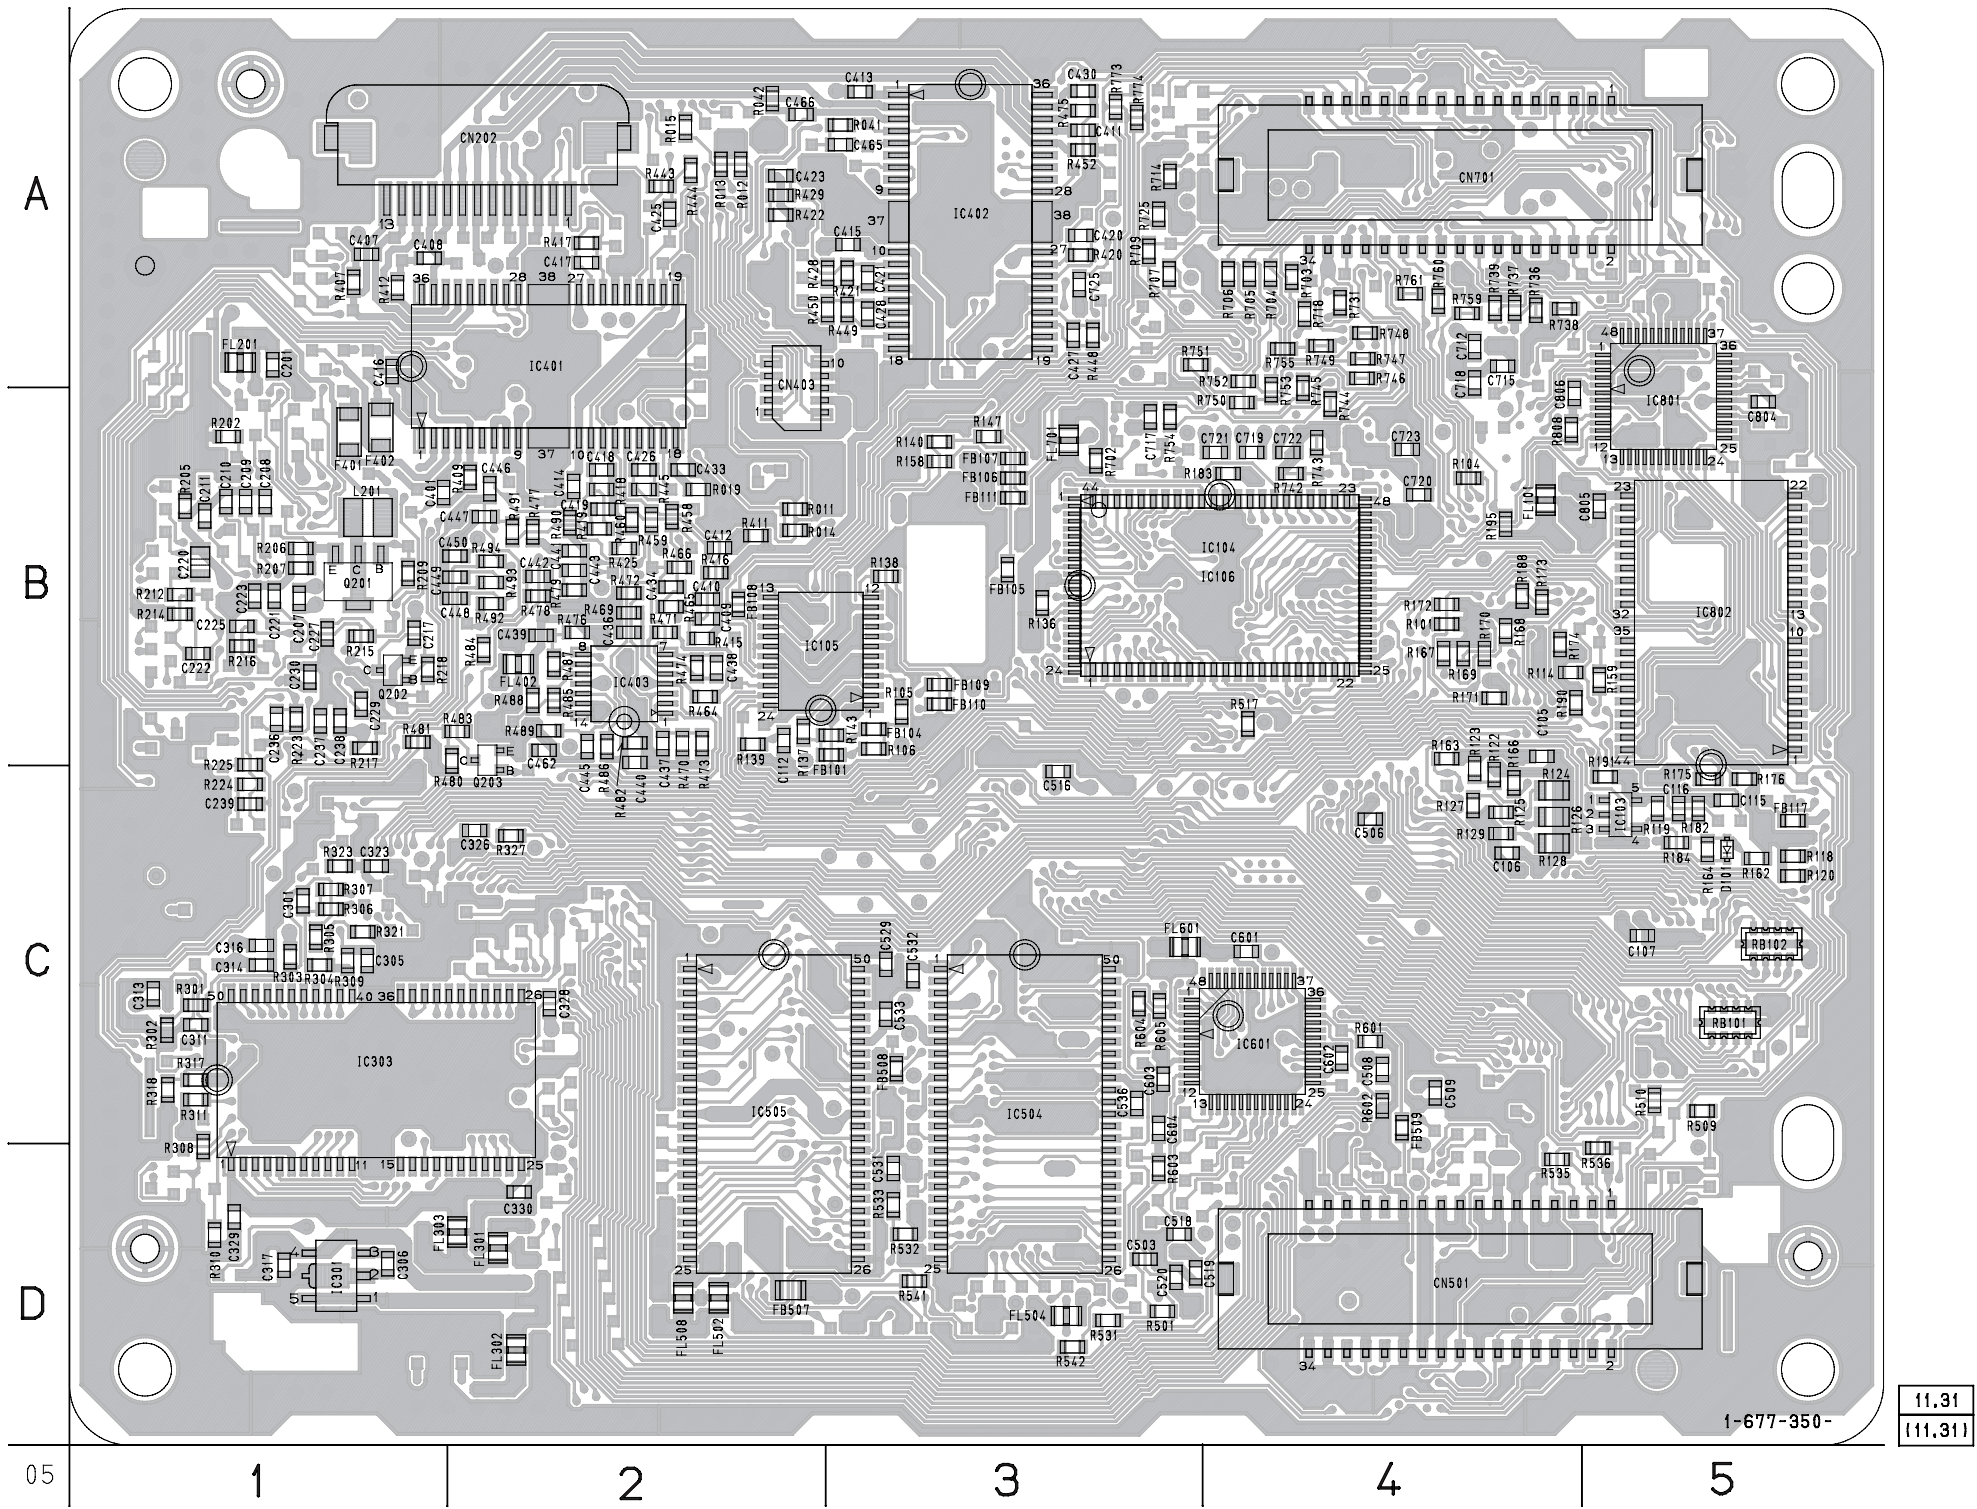


MB-86 BOARD (SIDE B)

CN202	A-2	IC402	A-3
CN501	D-4	IC403	B-2
CN701	A-4	IC504	C-3
		IC505	C-2
D101	C-5	IC601	C-4
		IC801	B-5
IC103	C-5	IC802	B-5
IC104	B-4		
IC105	B-2	Q201	B-1
IC301	D-1	Q203	B-1
IC303	C-1		
IC401	A-2		


• Waveforms

① IC201 ① (DVD play)
200 mV/DIV 100 ns/DIV




536 mVp-p

③ IC201 ③ (CD play)
500 mV/DIV 200 ms/DIV




1.7 Vp-p

① IC201 ① (CD play)
500 mV/DIV 500 ns/DIV




880 mVp-p

④ IC201 ④ (DVD play)
100 mV/DIV 50 ms/DIV




180 mVp-p

② IC201 ② (DVD play)
200 mV/DIV 500 ms/DIV




592 mVp-p

④ IC201 ④ (CD play)
500 mV/DIV 50 ms/DIV




860 mVp-p

② IC201 ② (CD play)
200 mV/DIV 20 ms/DIV




448 mVp-p

⑤ IC201 ⑤ (DVD play)
500 mV/DIV 100 ns/DIV




1.5 Vp-p

③ IC201 ③ (DVD play)
500 mV/DIV 50 ms/DIV




1.3 Vp-p

⑤ IC201 ⑤ (CD play)
500 mV/DIV 500 ns/DIV




1.5 Vp-p




MB-86 (ARP) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.

– Ref. No.: MB-86 board; 1,000 series –

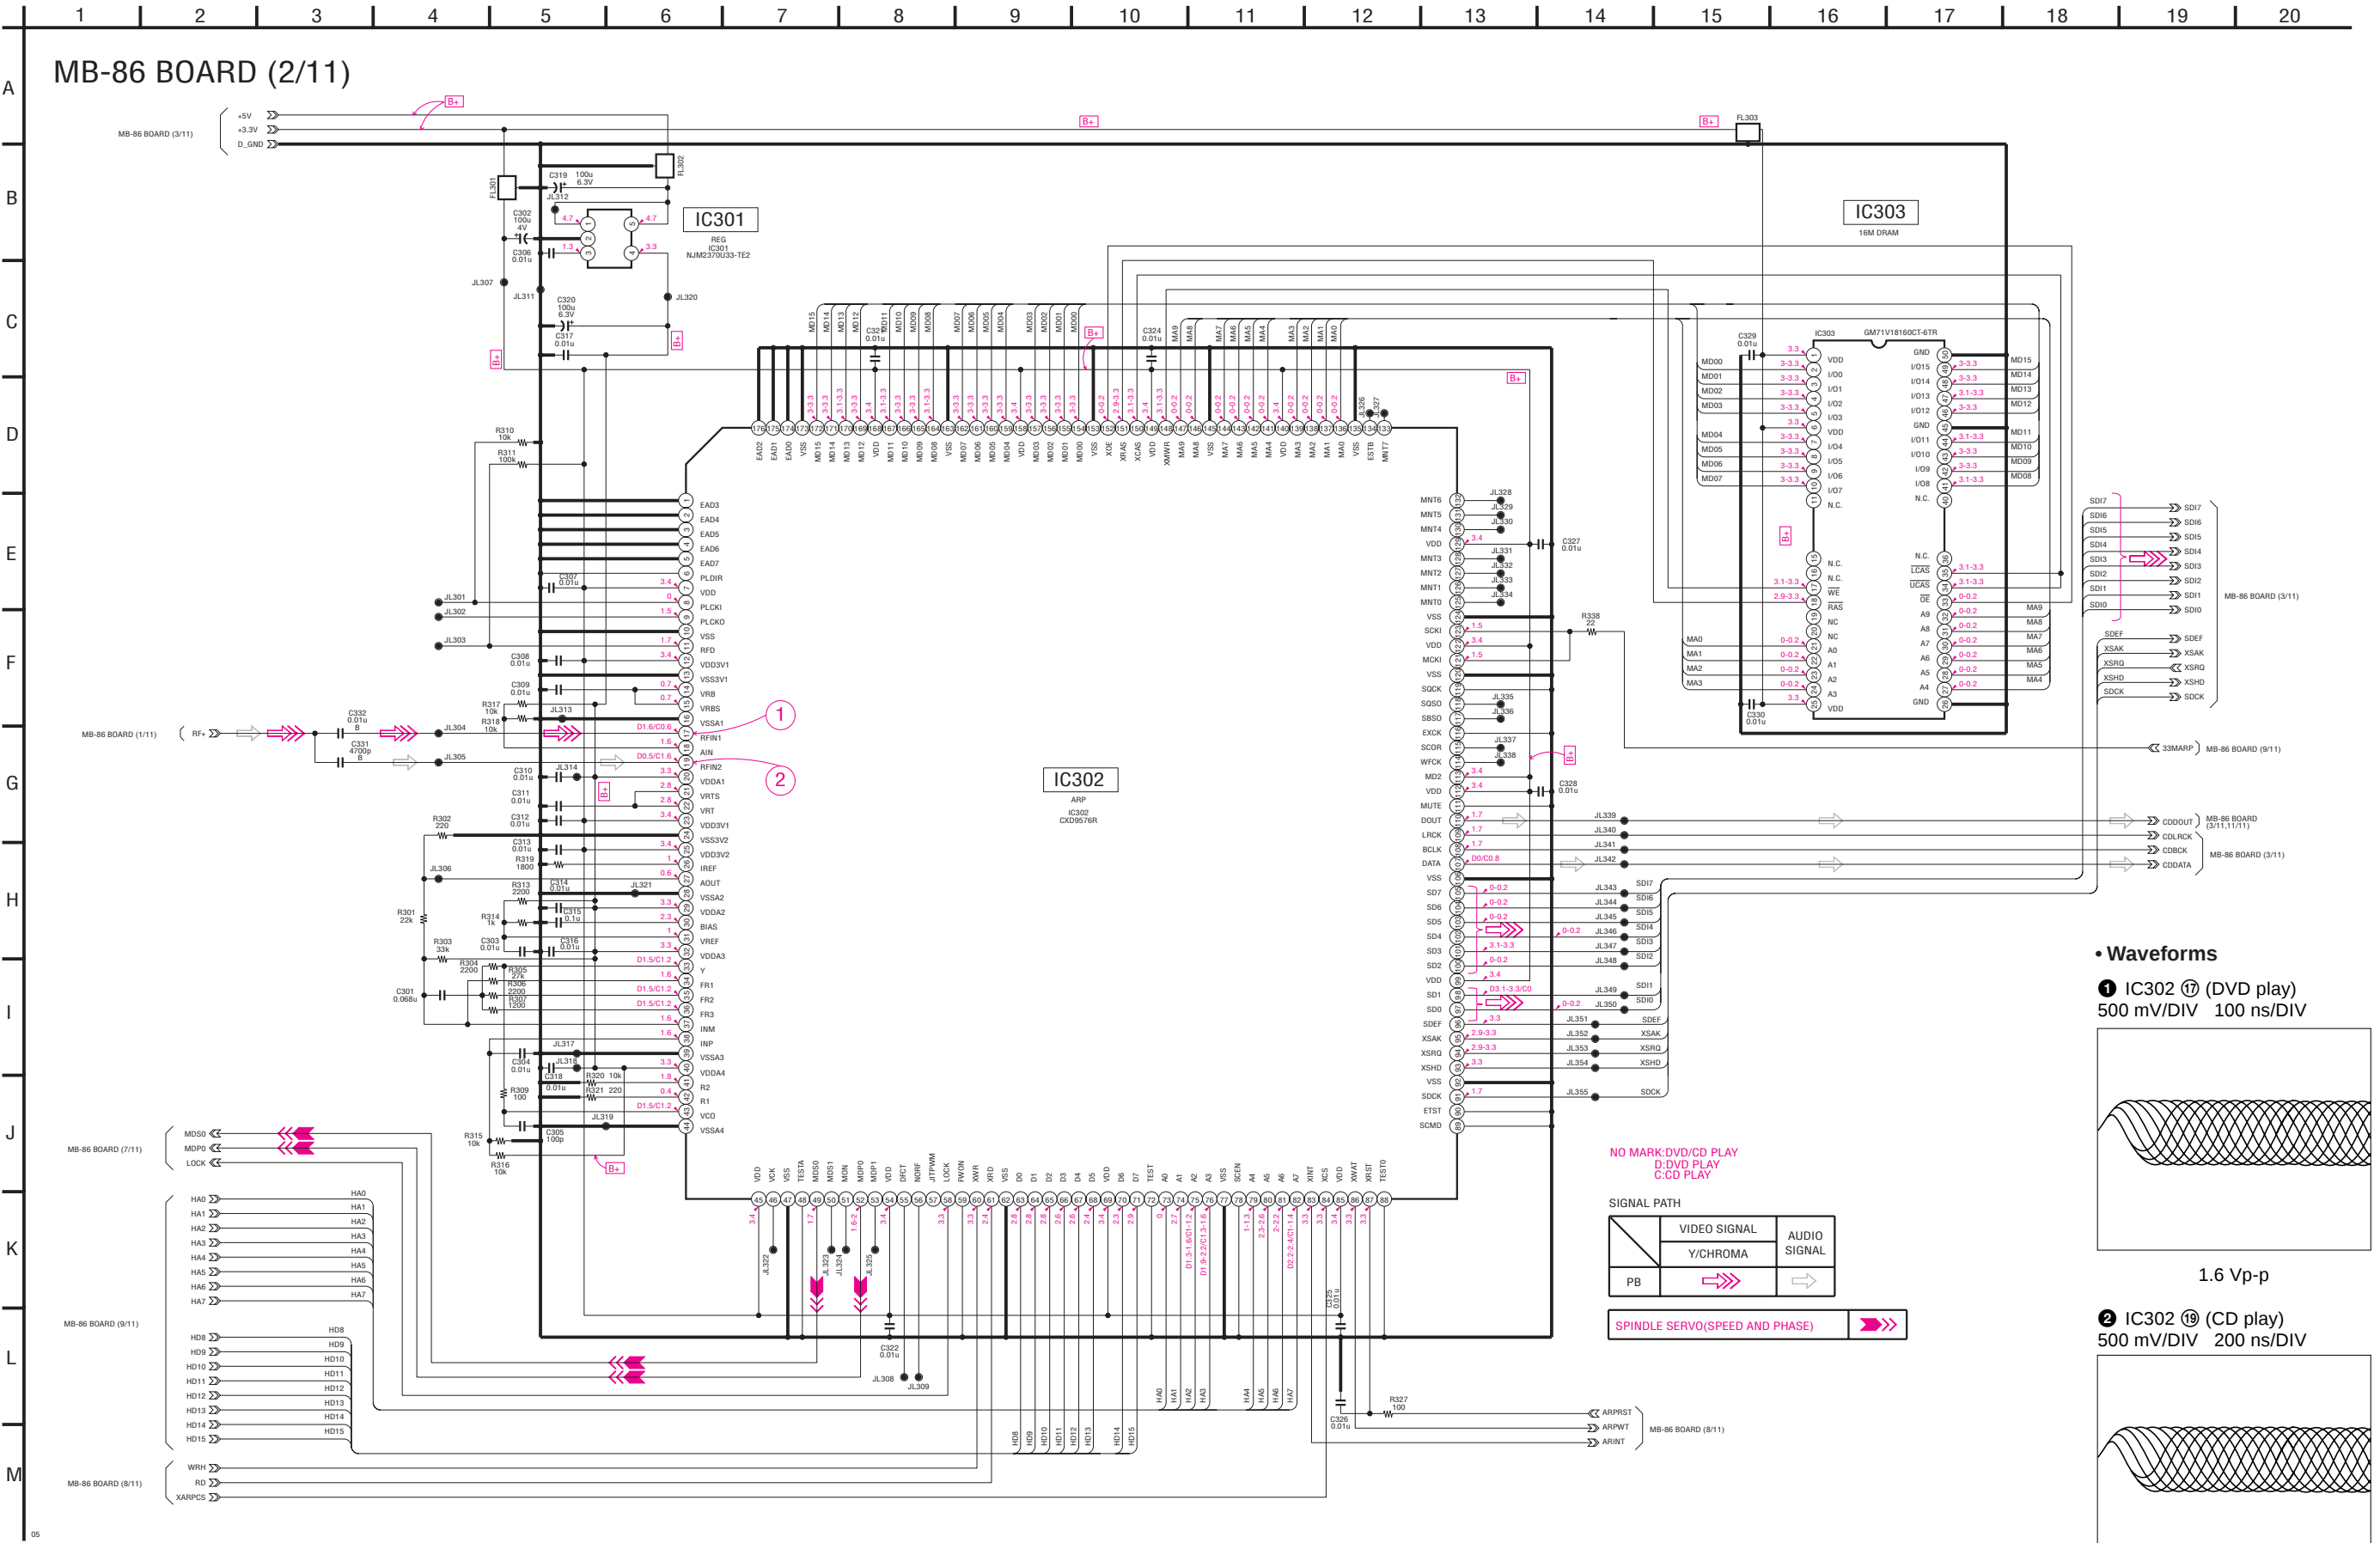


MB-86 (AV DECODER) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.


– Ref. No.: MB-86 board; 1,000 series –

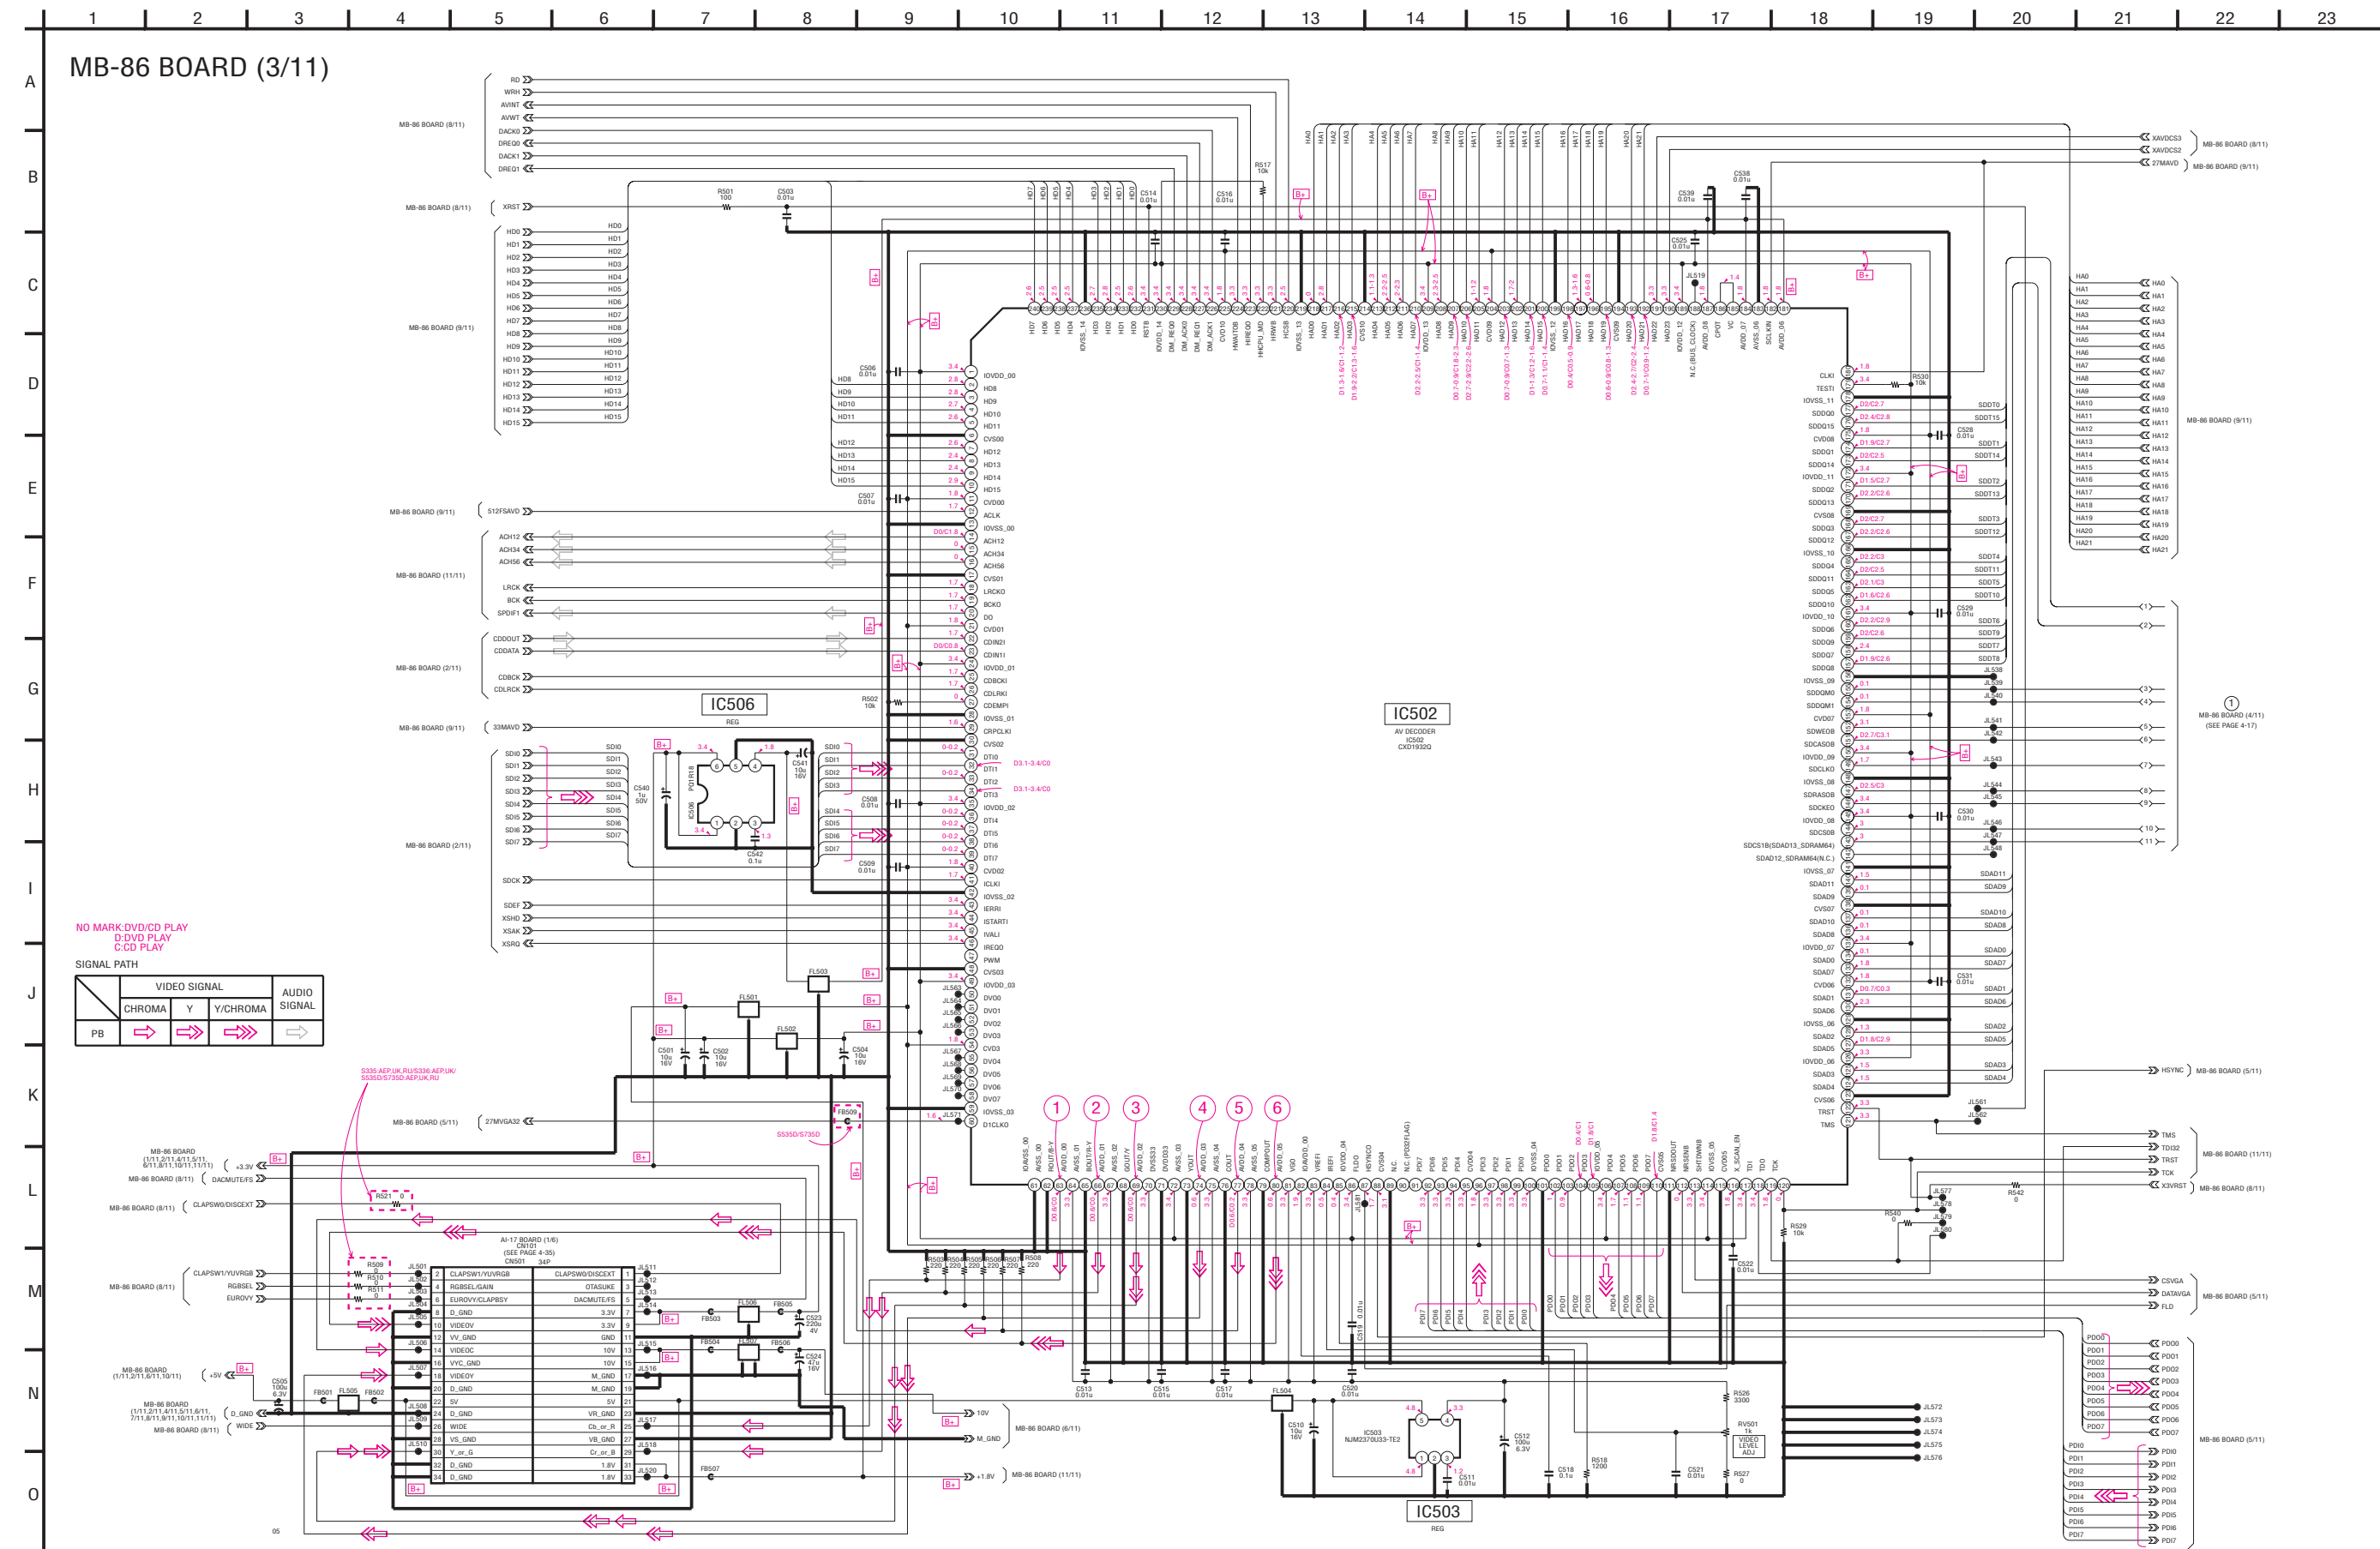

MB-86 (SDRAM) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.
– Ref. No.: MB-86 board; 1,000 series –

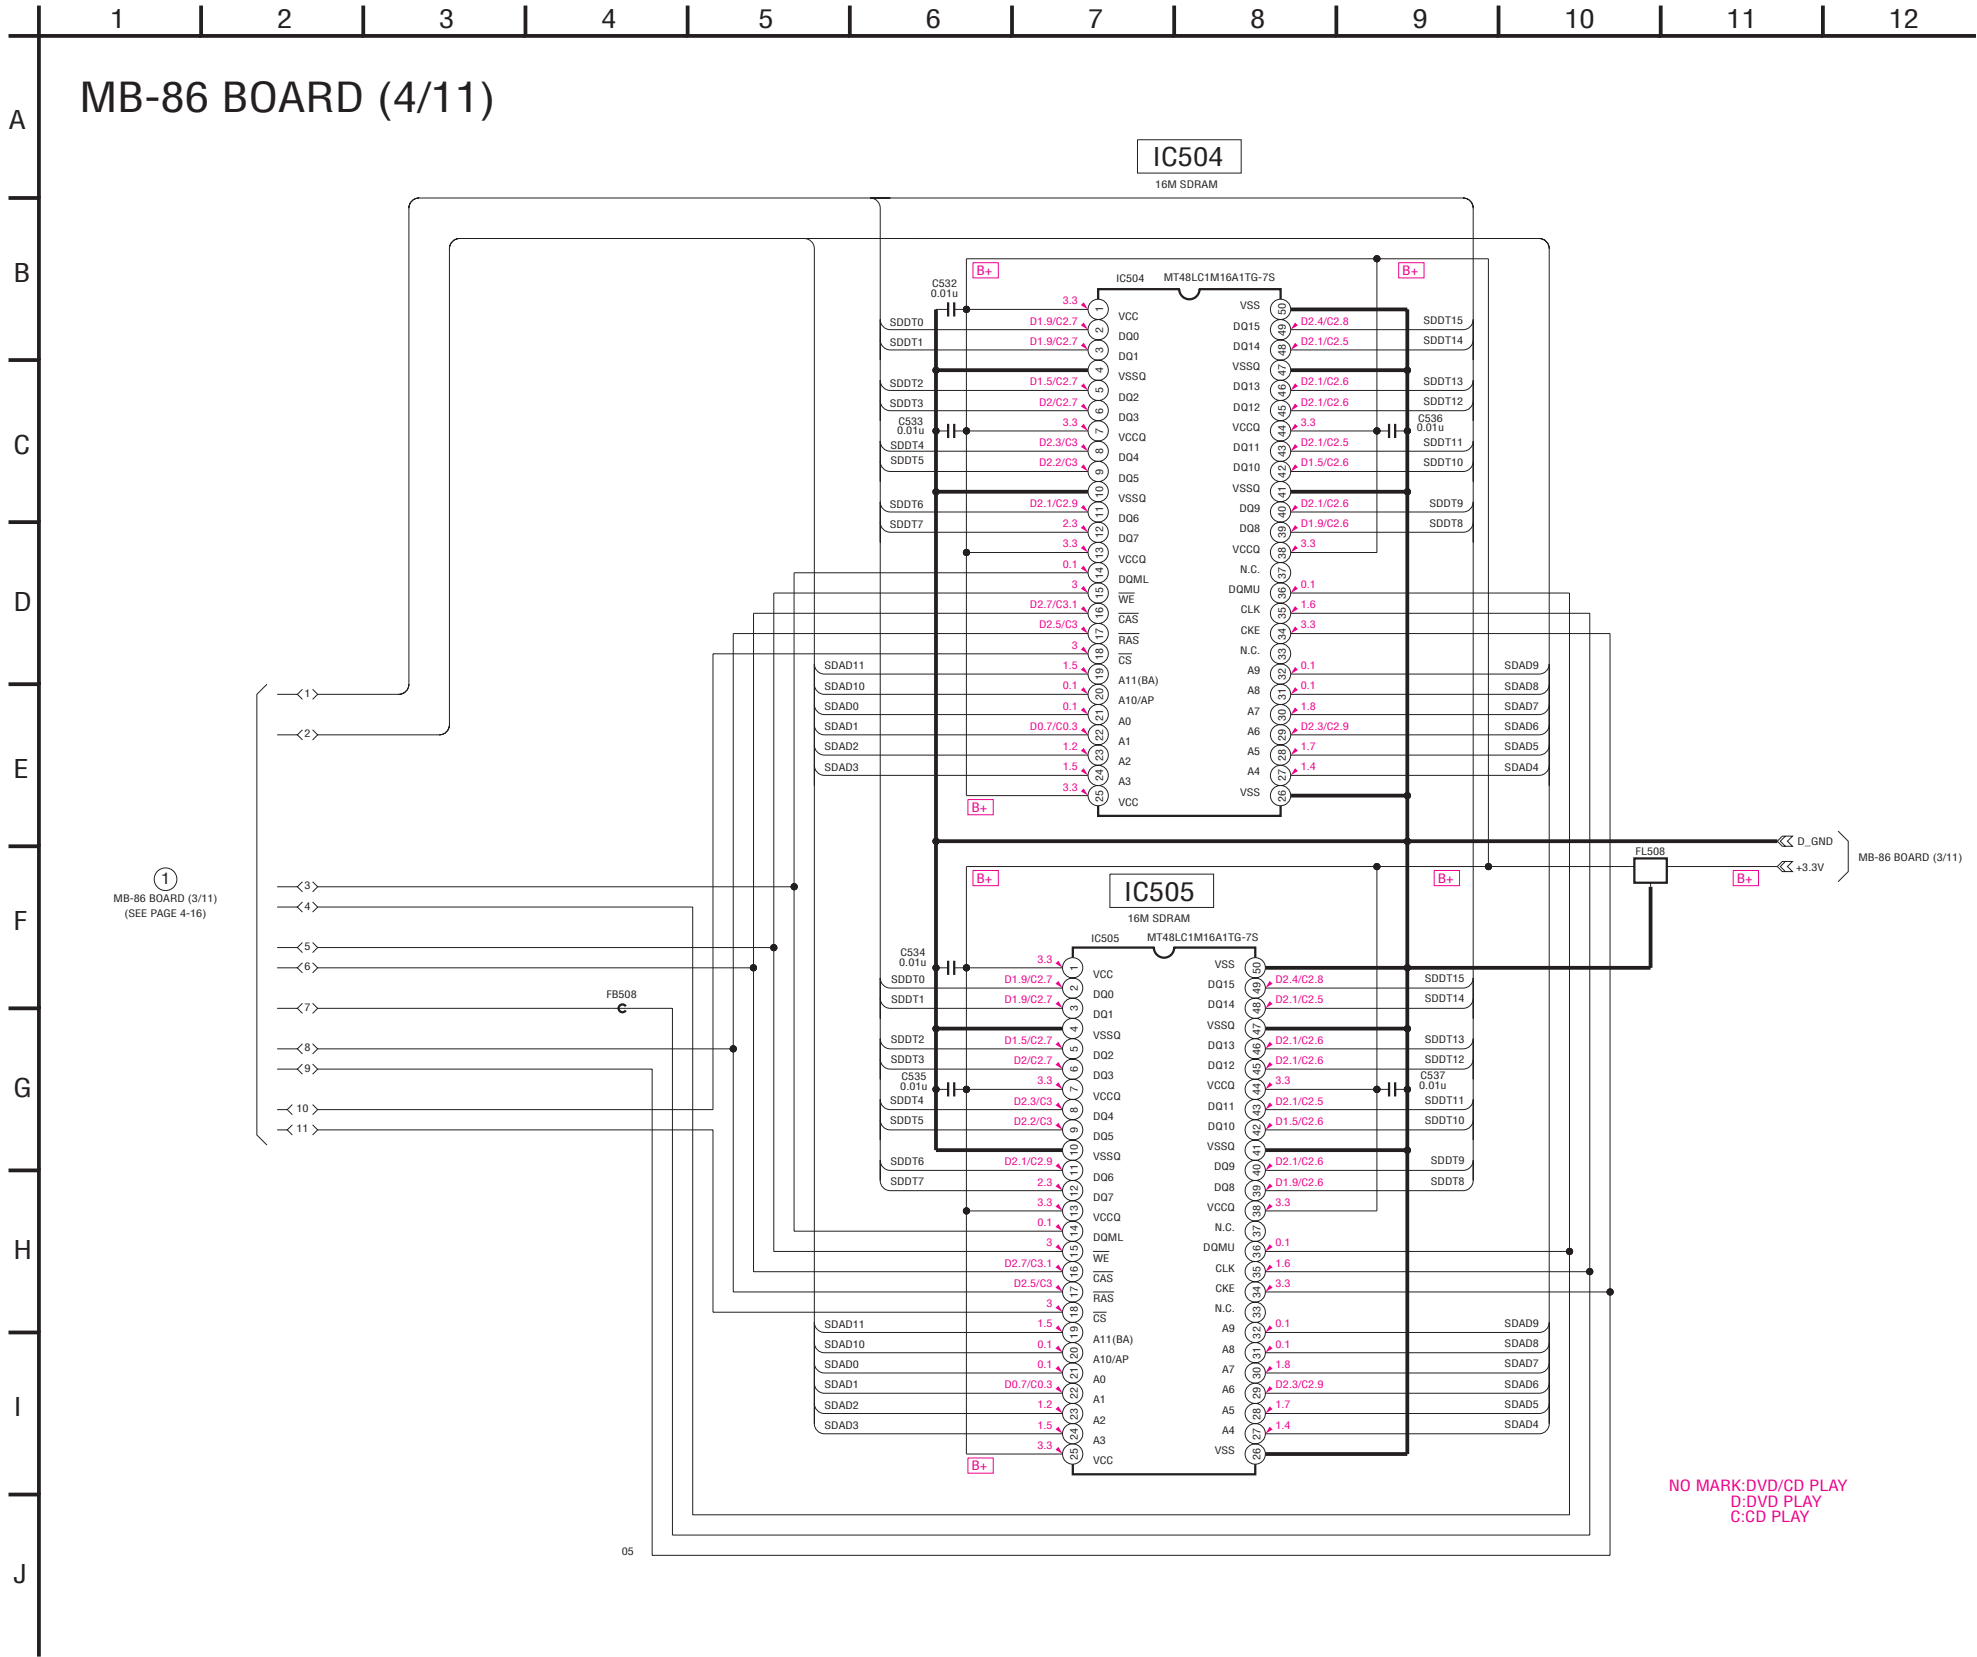


• Waveforms

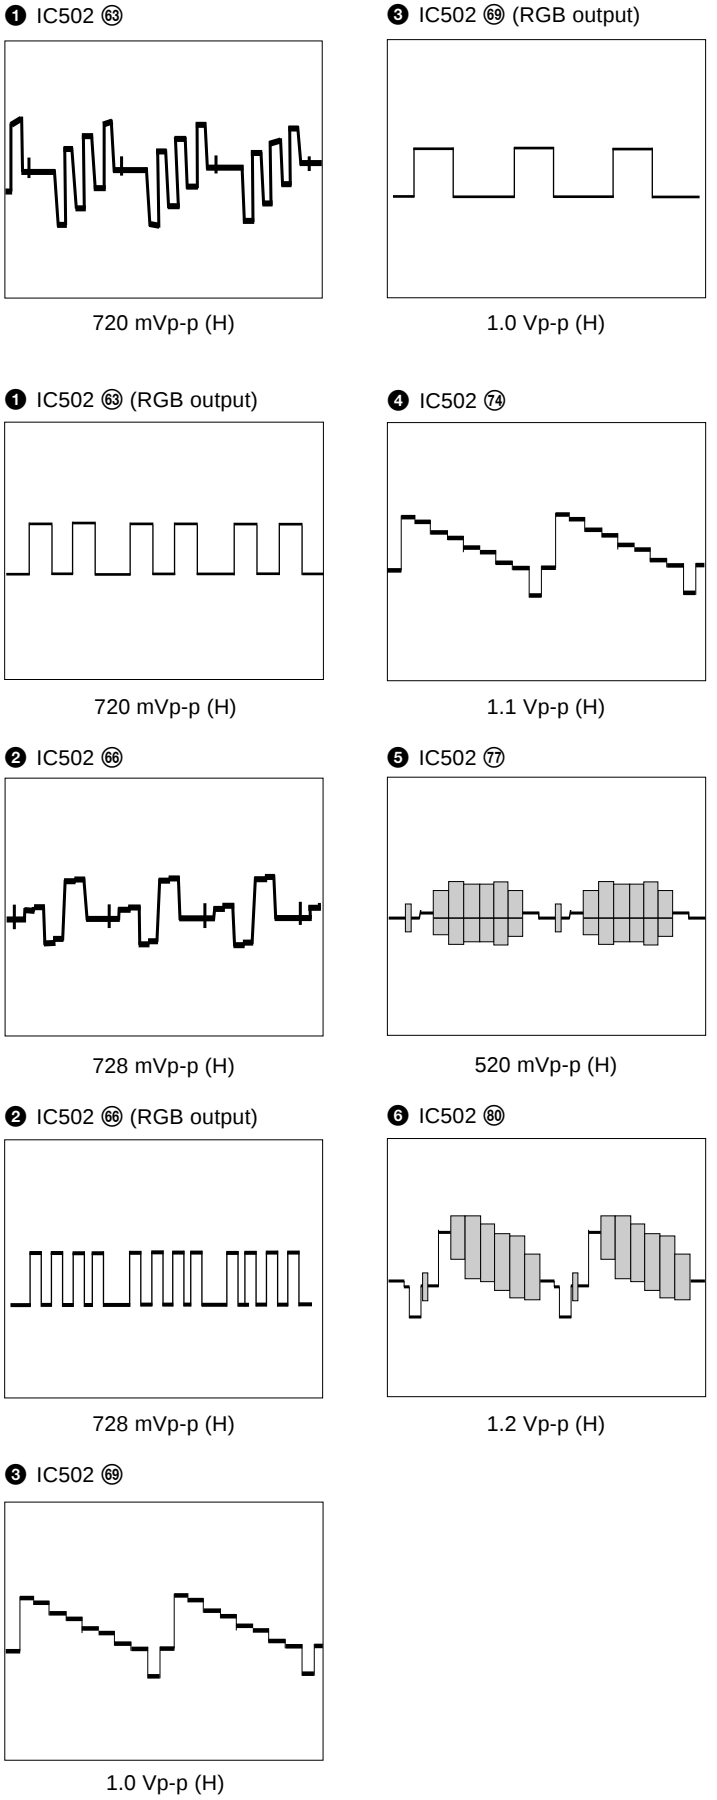


MB-86 (VGA) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.

– Ref. No.: MB-86 board; 1,000 series –

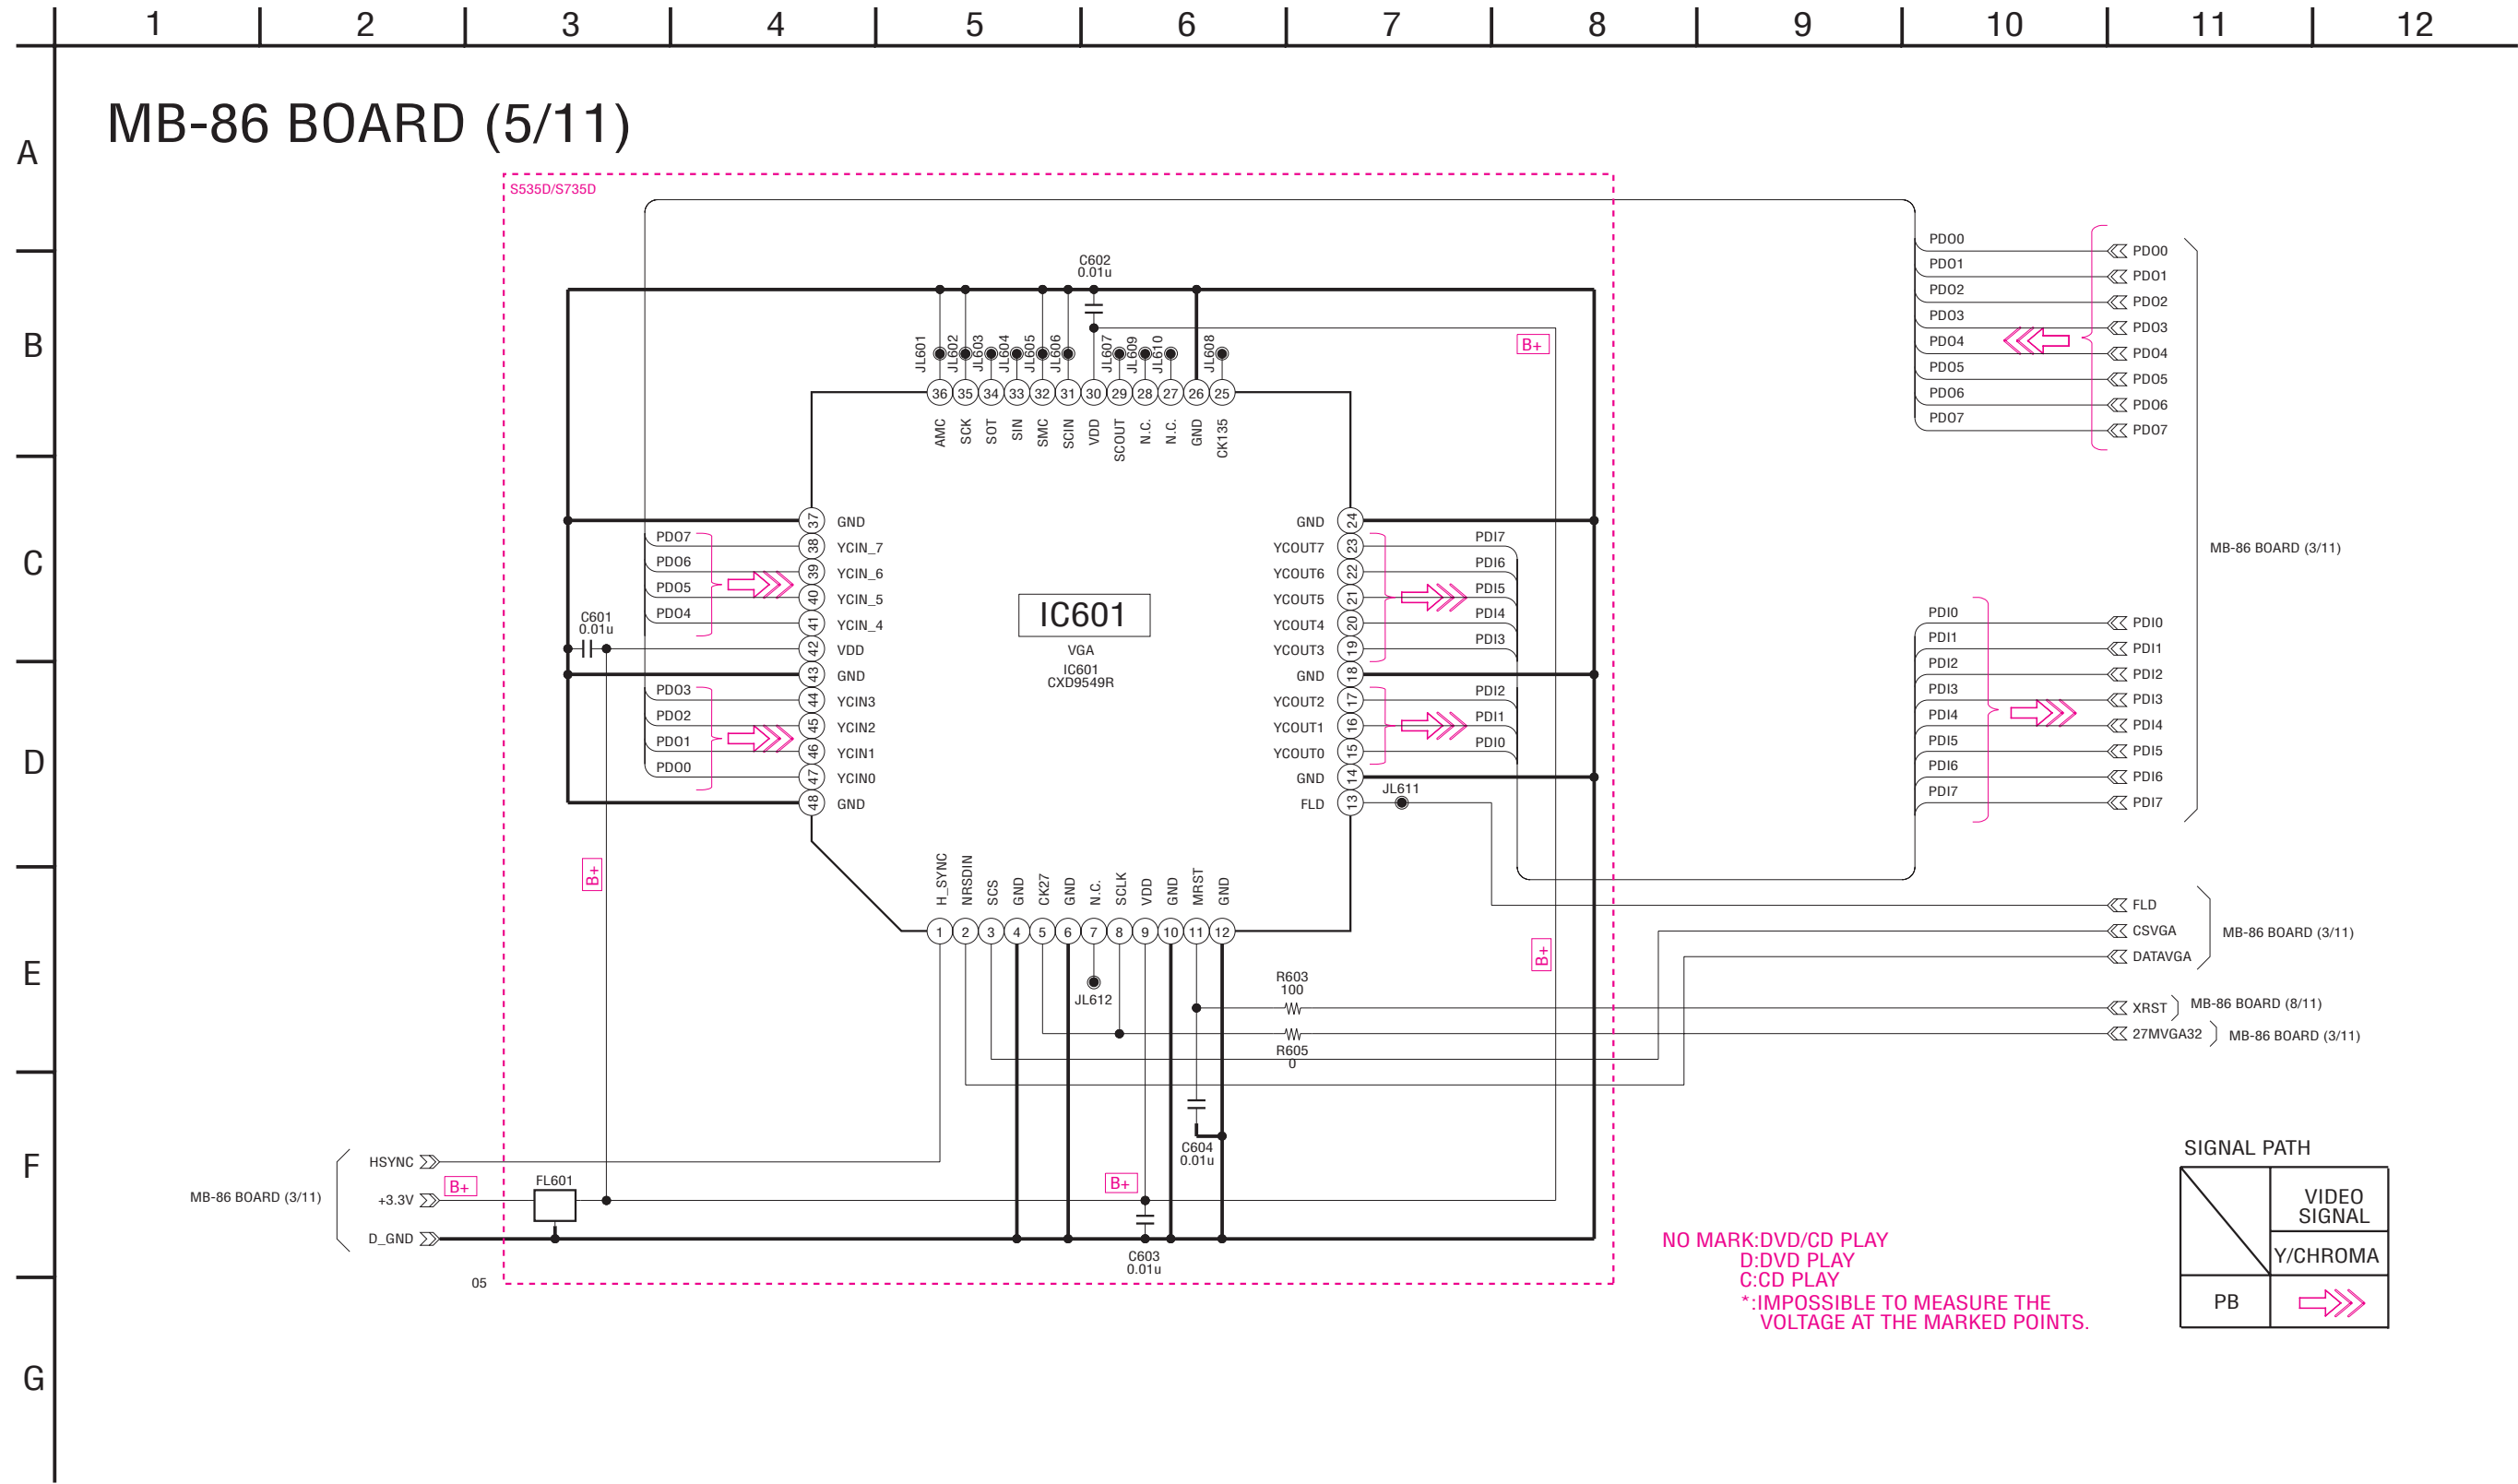

MB-86 (DRIVE) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.
– Ref. No.: MB-86 board; 1,000 series –

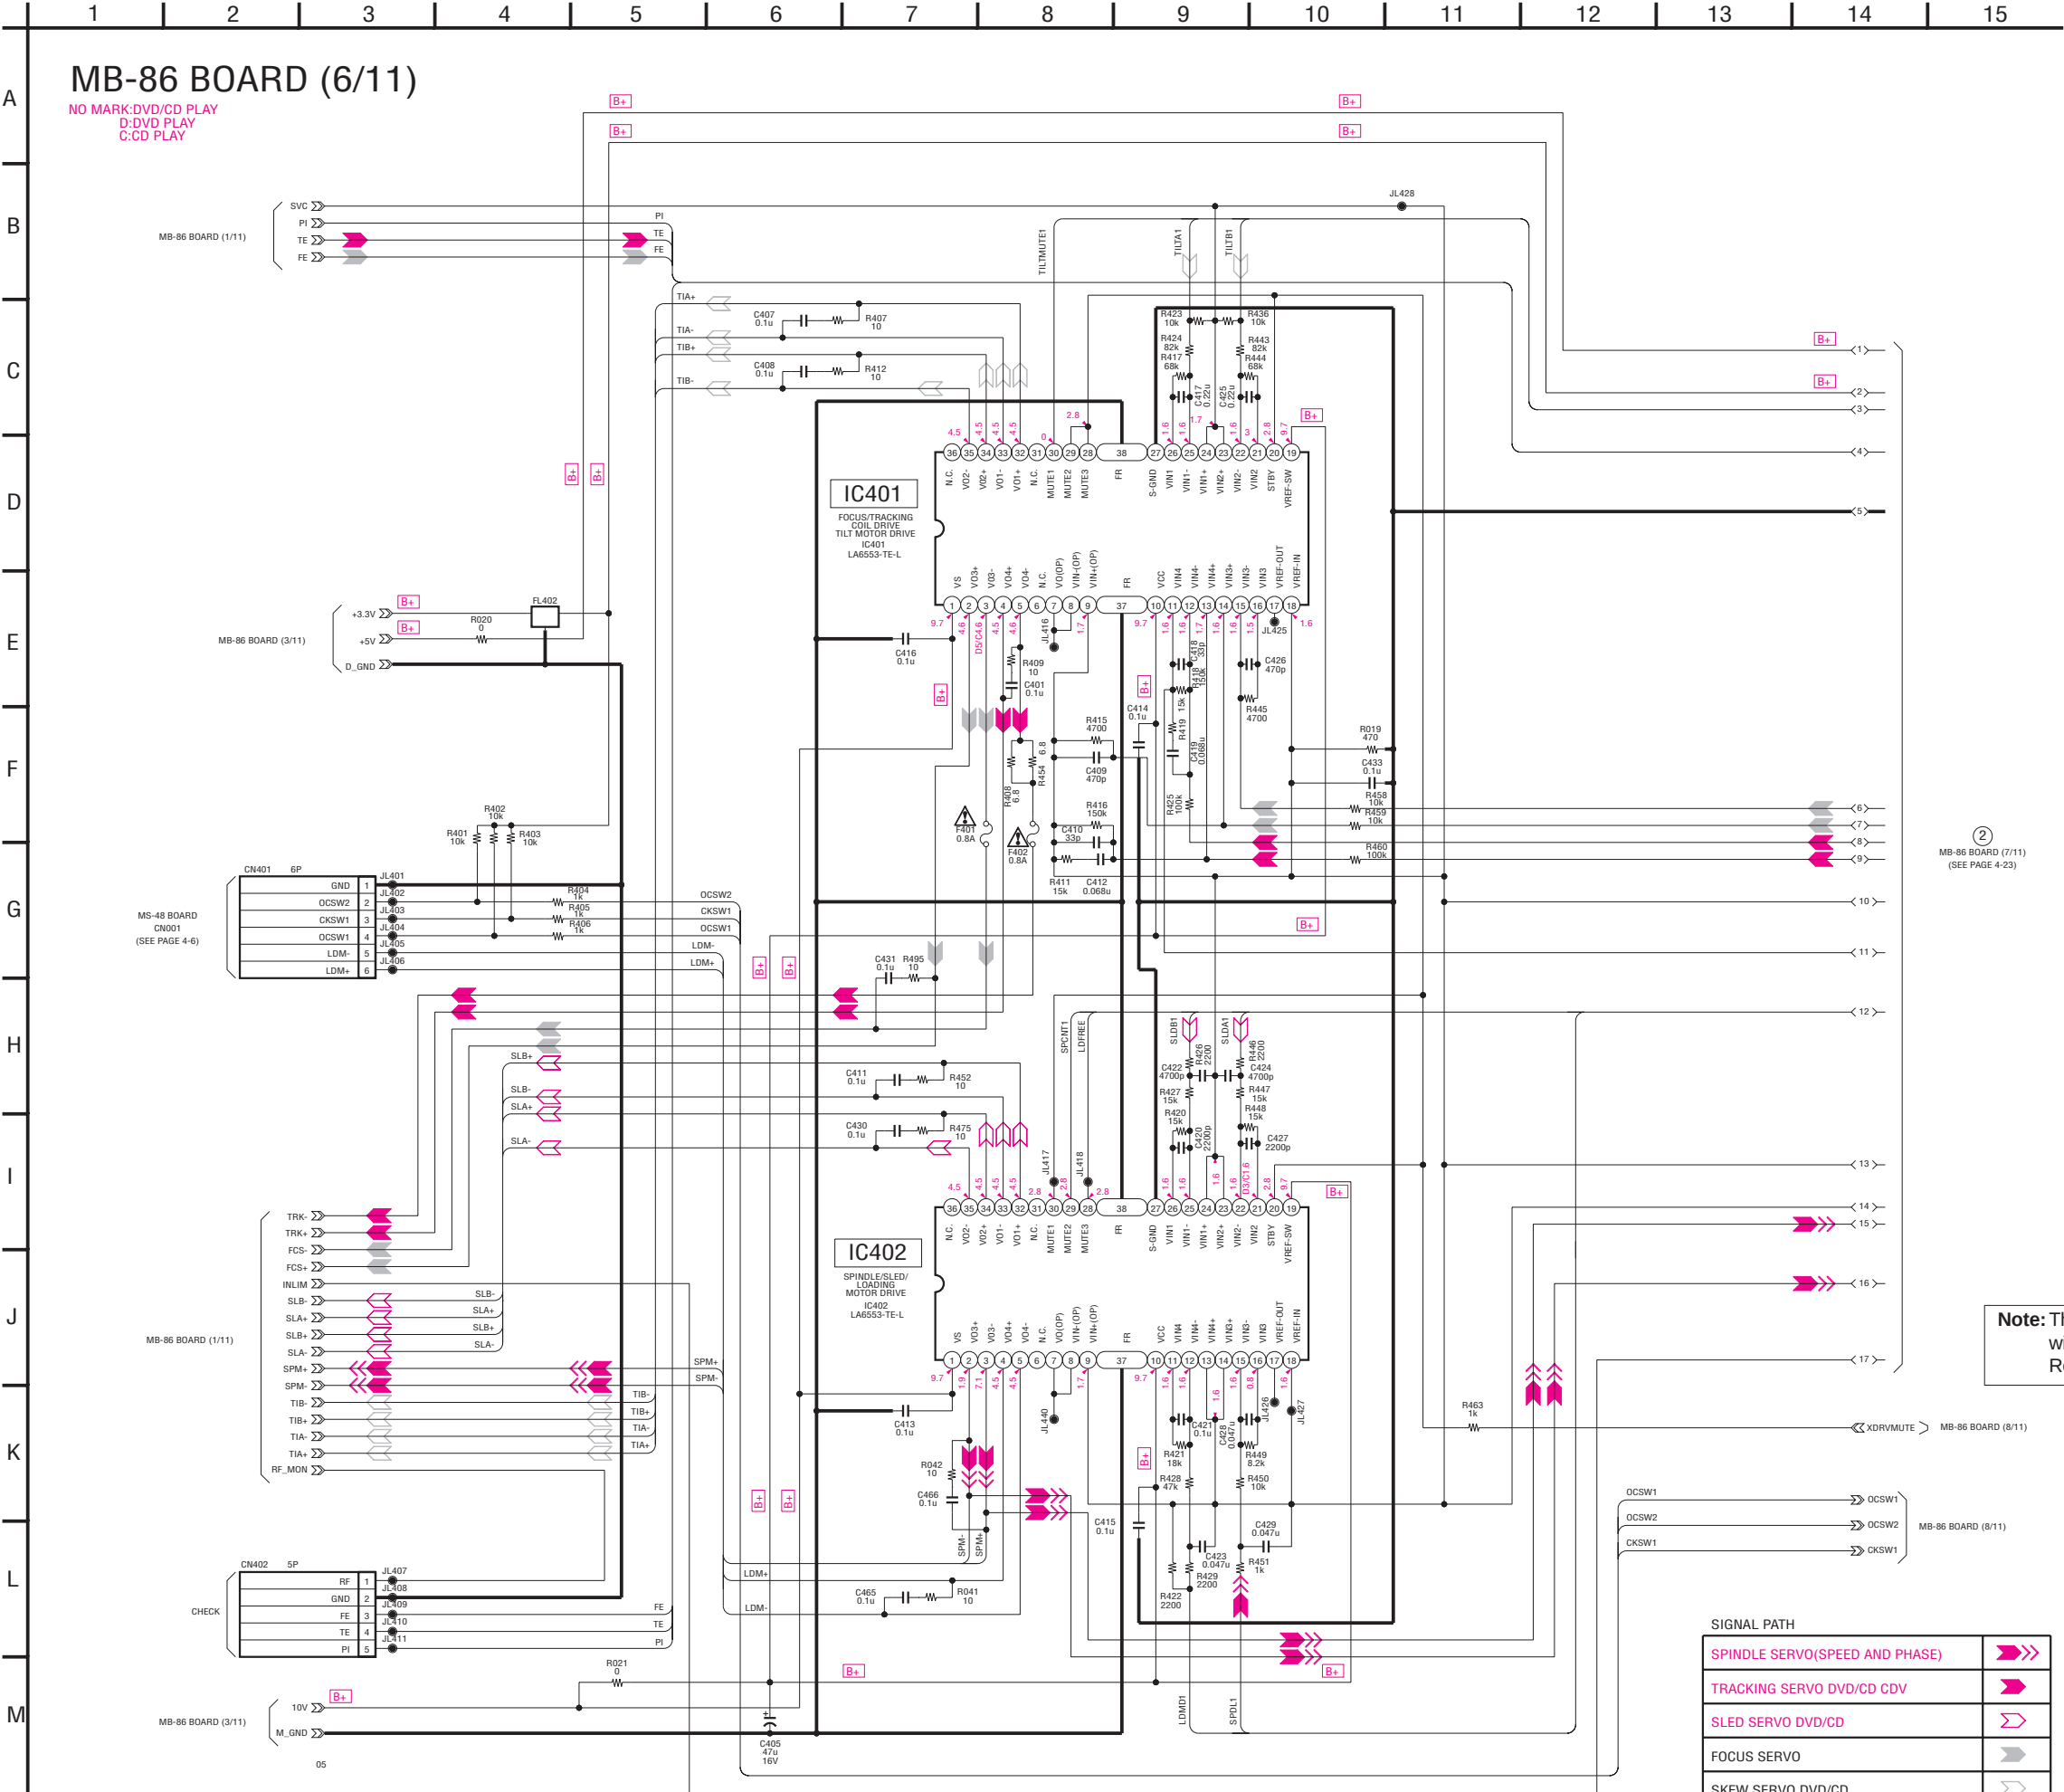

②
MB-86 BOARD (7/11)
(SEE PAGE 4-23)

Note: The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.


SIGNAL PATH	
SPINDLE SERVO(SPEED AND PHASE)	
TRACKING SERVO DVD/CD CDV	
SLED SERVO DVD/CD	
FOCUS SERVO	
SKREW SERVO DVD/CD	

MB-86 (SERVO DSP) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.

– Ref. No.: MB-86 board; 1,000 series –


• Waveforms

① IC404 ② (DVD play)
100 mV/DIV 50 ms/DIV




180 mVp-p

① IC404 ② (CD play)
500 mV/DIV 50 ms/DIV




860 mVp-p

② IC404 ③ (DVD play)
500 mV/DIV 50 ms/DIV




1.4 Vp-p

② IC404 ③ (CD play)
500 mV/DIV 200 mV/DIV




1.7 Vp-p

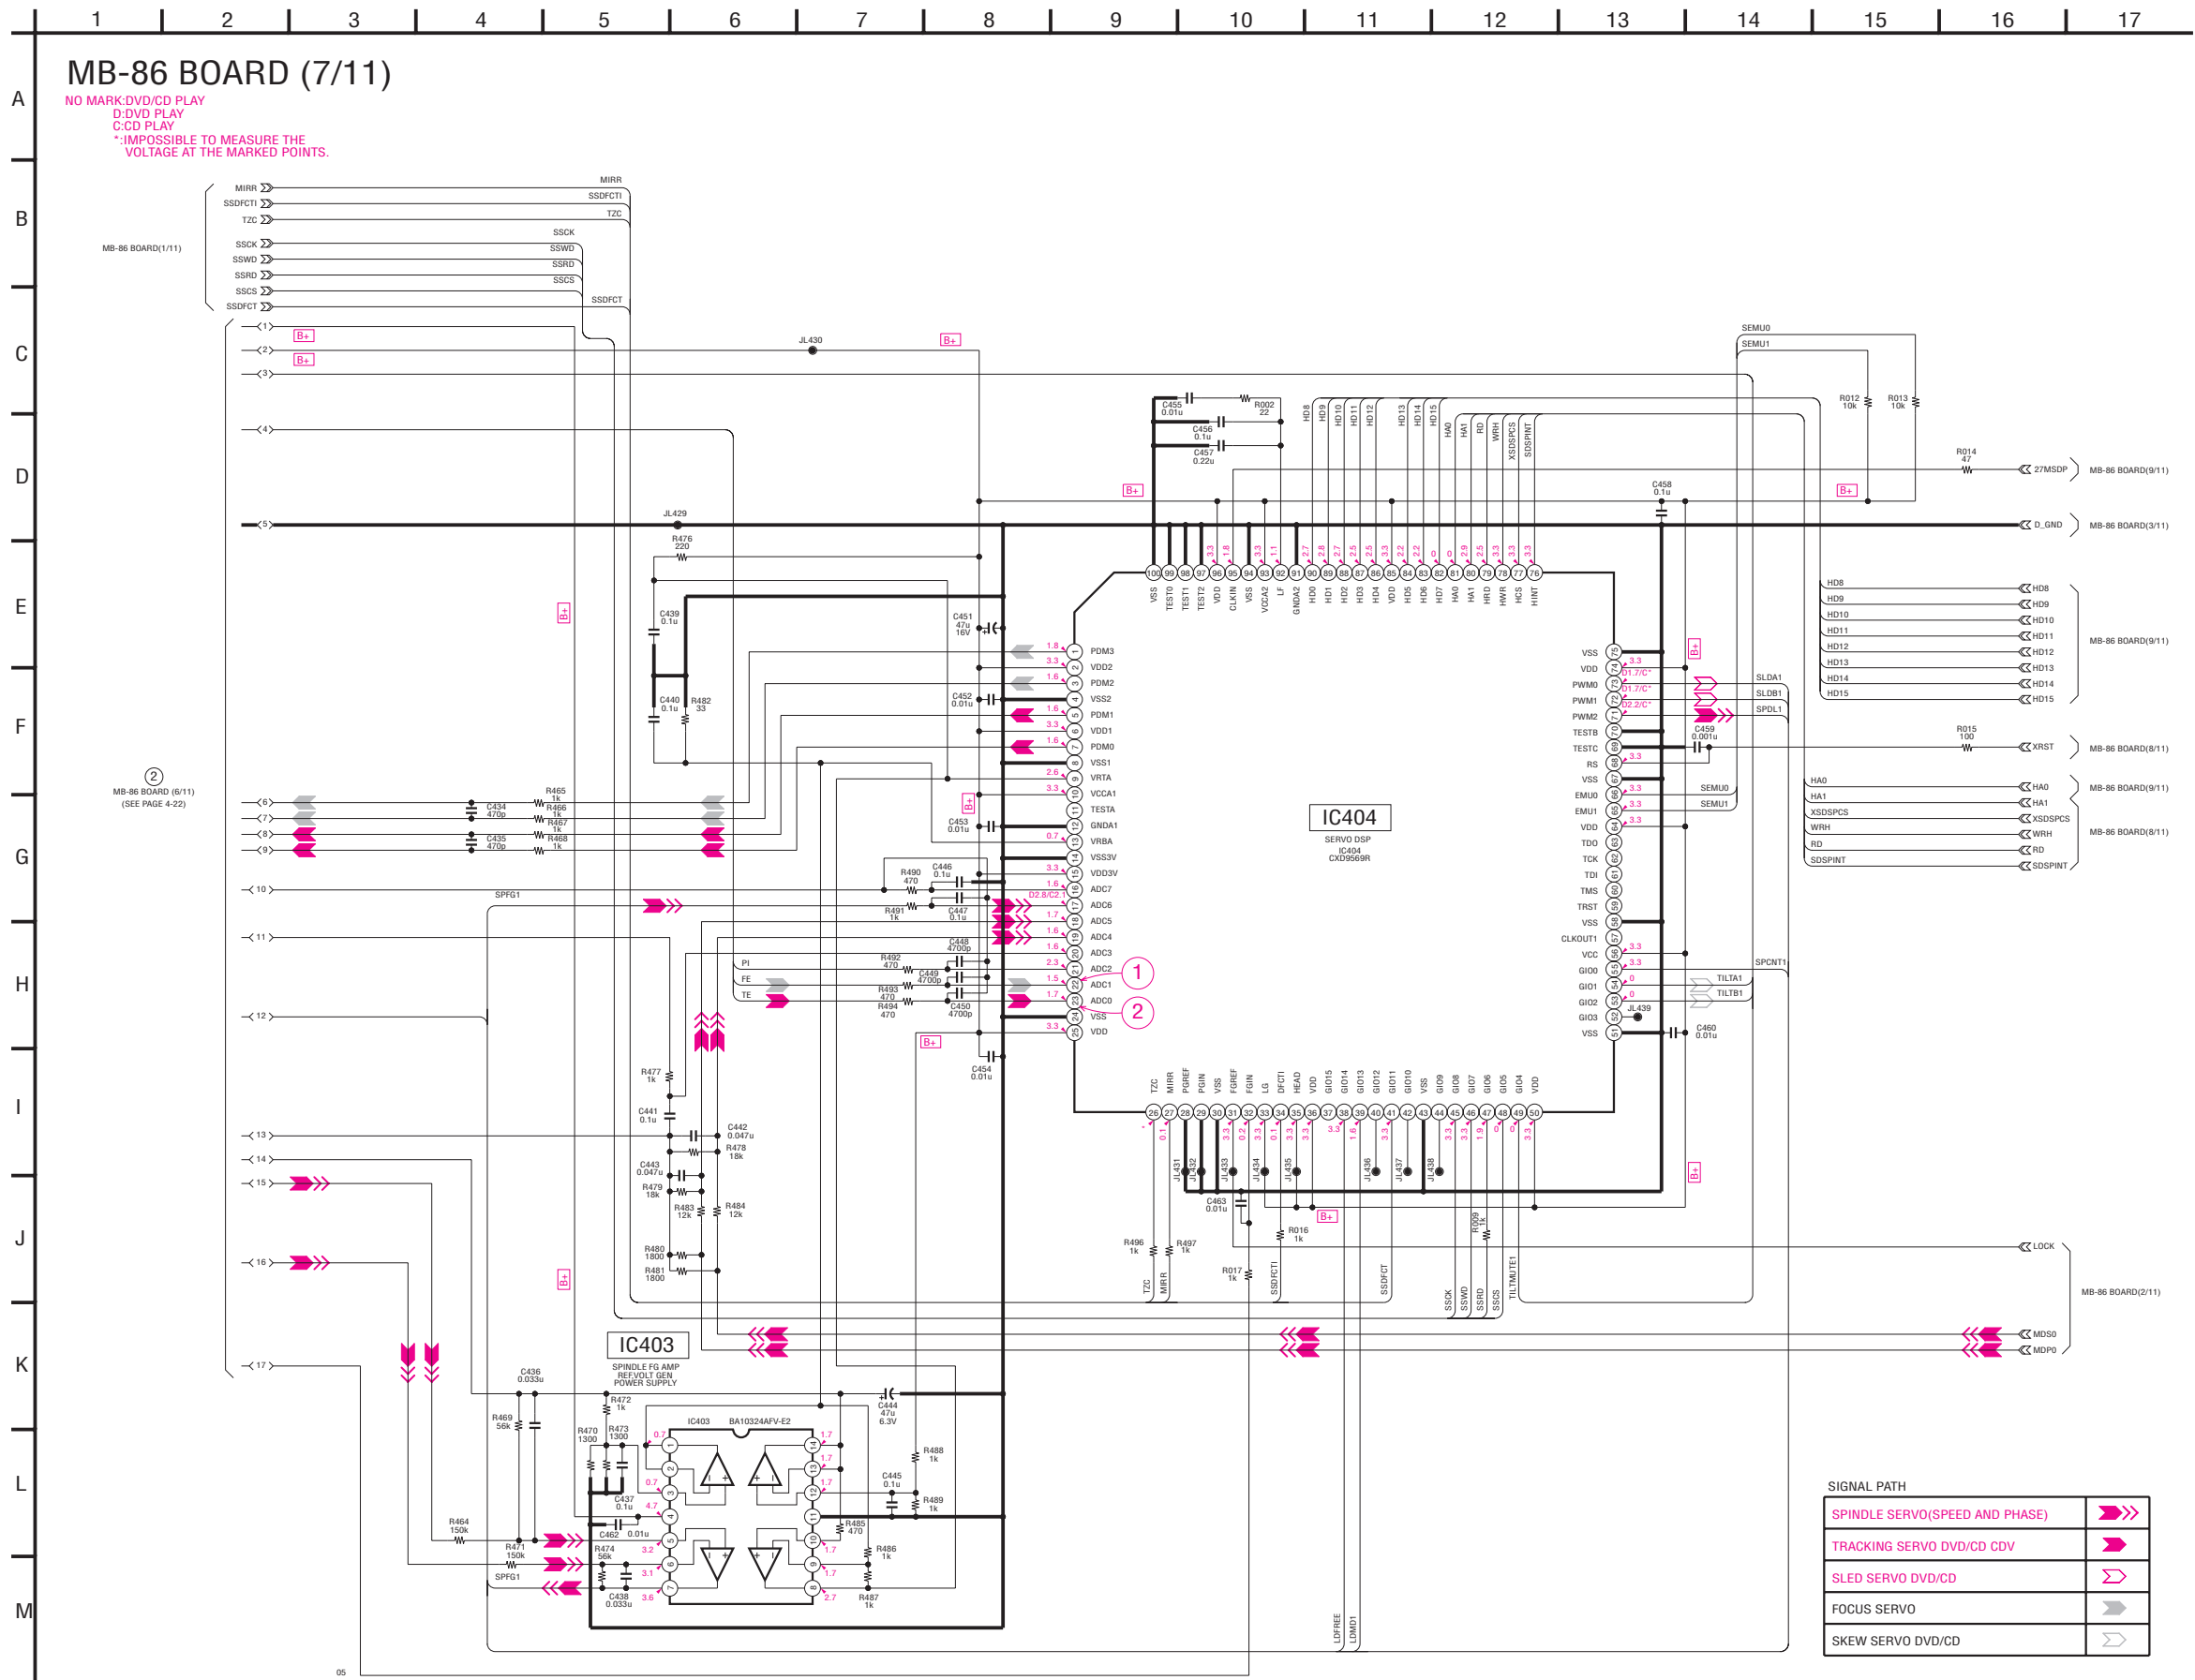

MB-86 (SYSTEM CONTROL) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.

– Ref. No.: MB-86 board; 1,000 series –

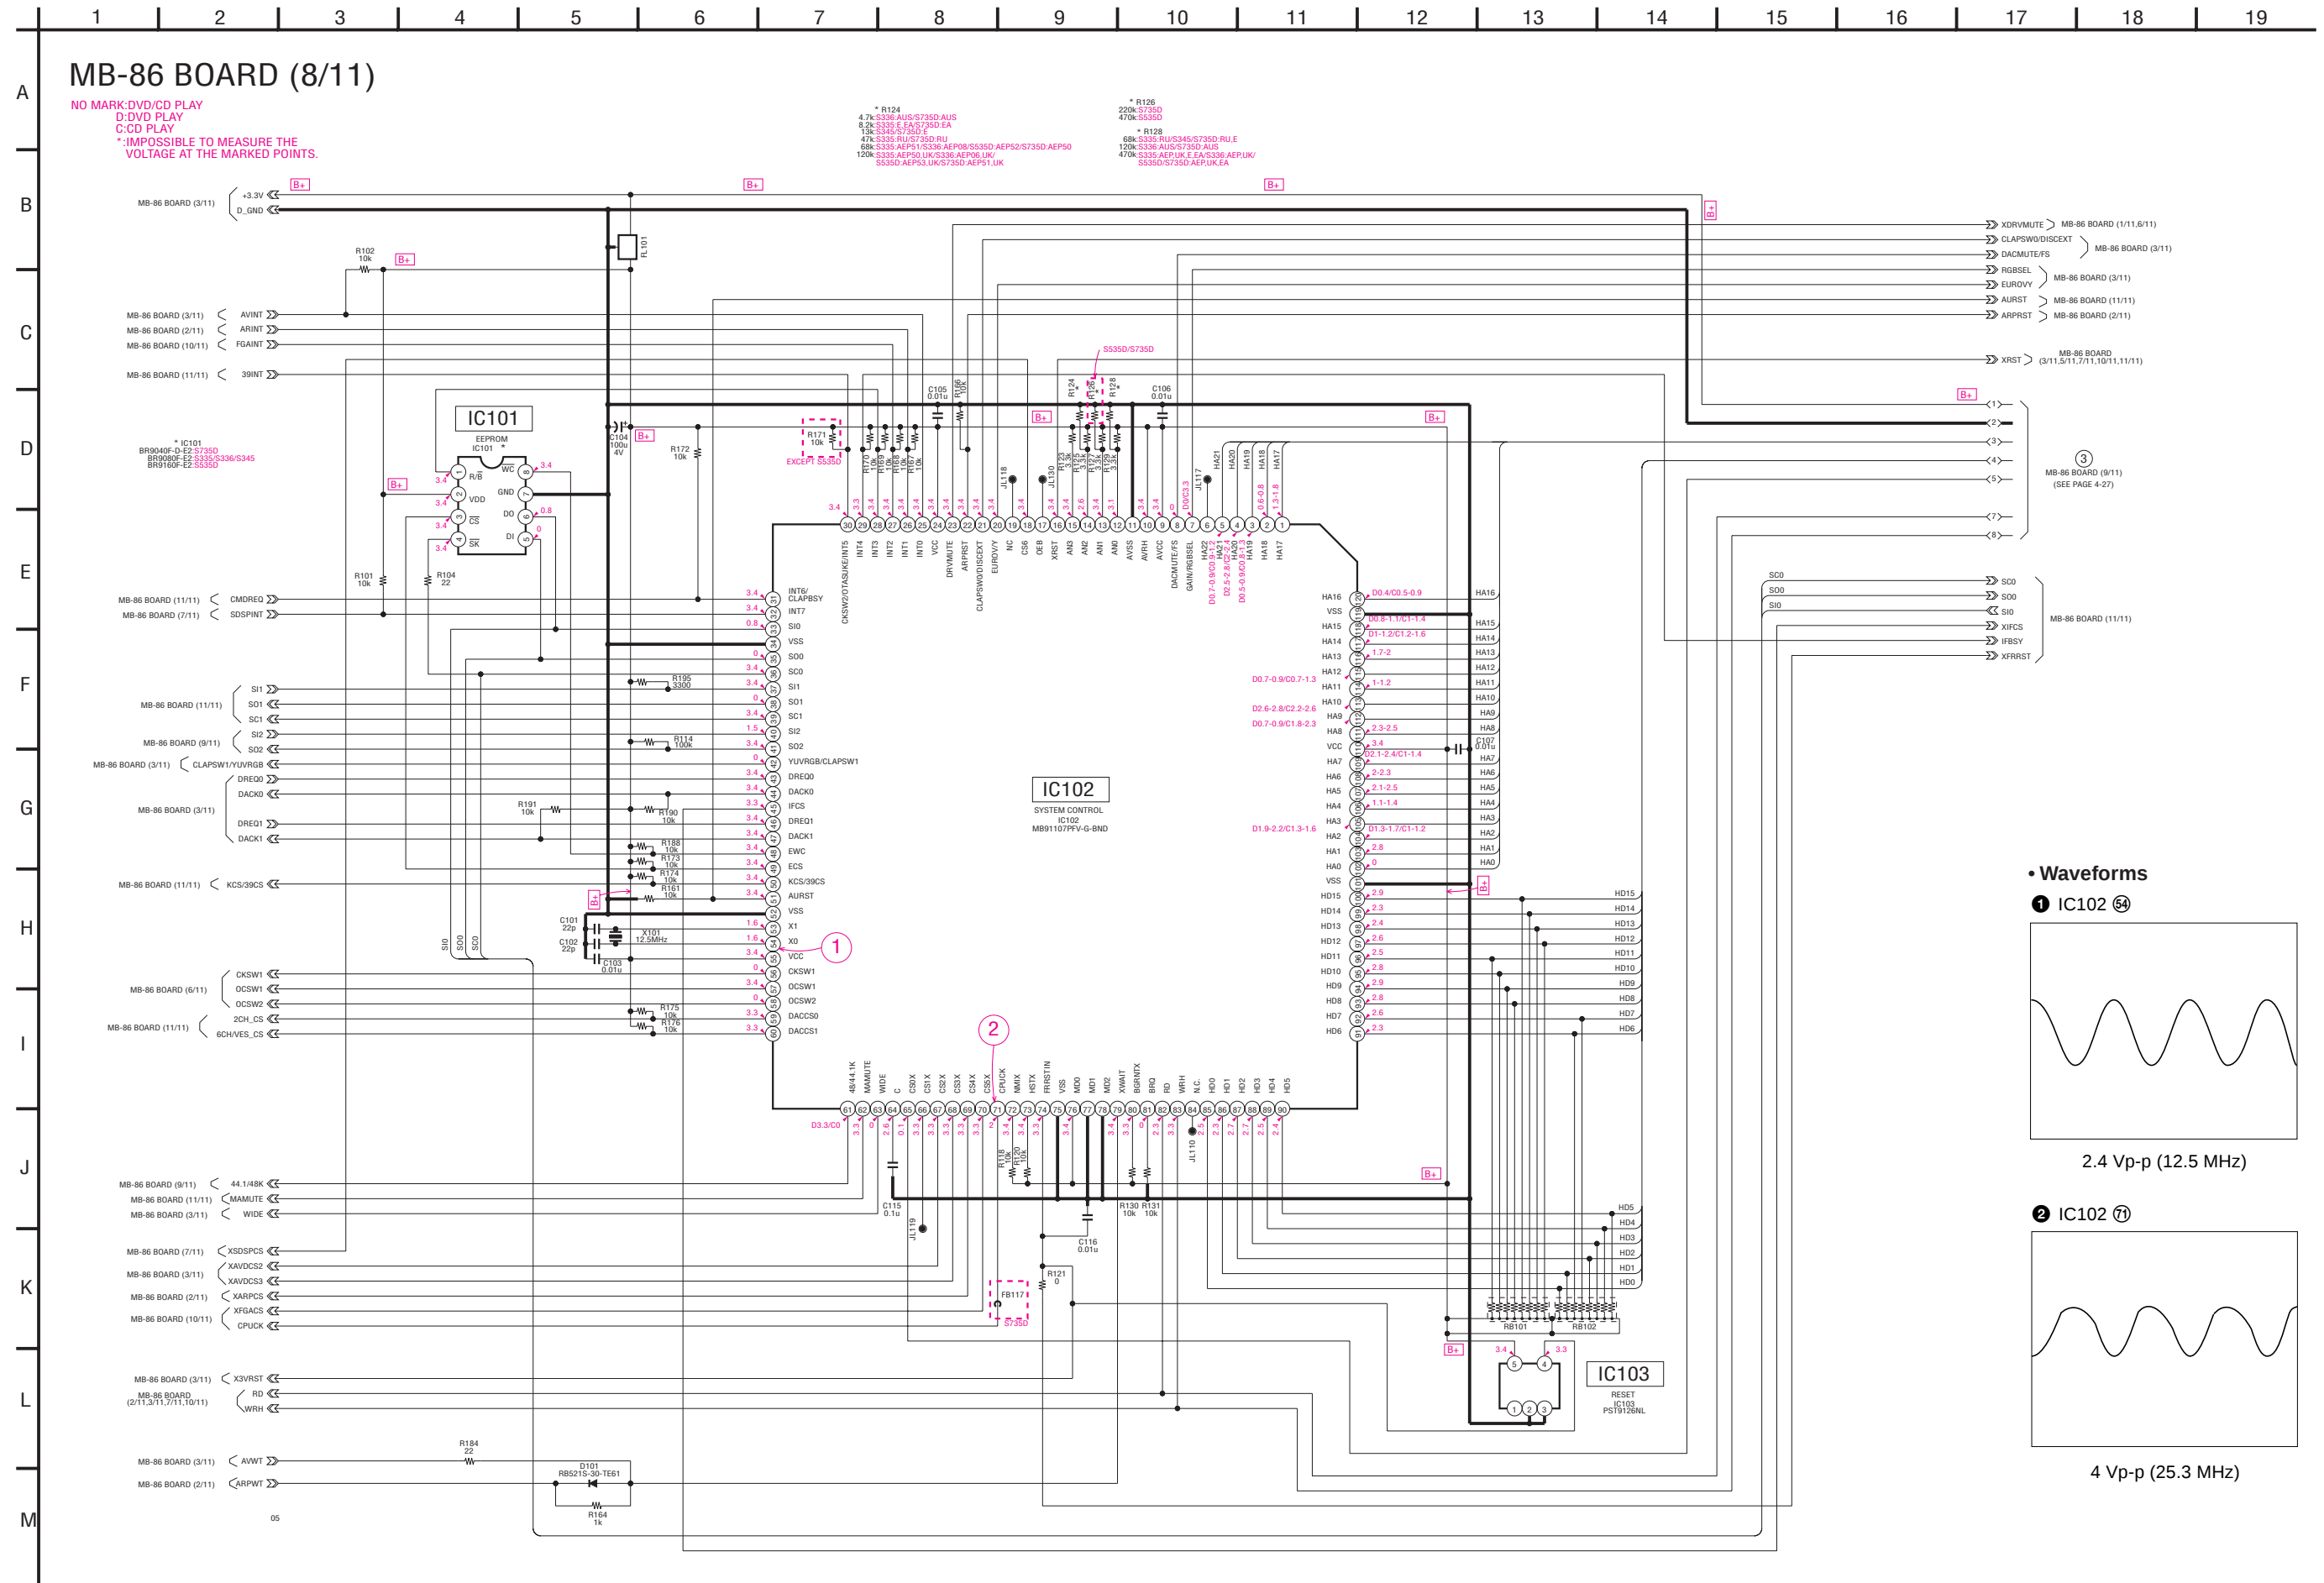


SYSTEM CONTROL

MB-86 (8/11)


MB-86 (MEMORY, CLOCK GENERATOR) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.

– Ref. No.: MB-86 board; 1,000 series –

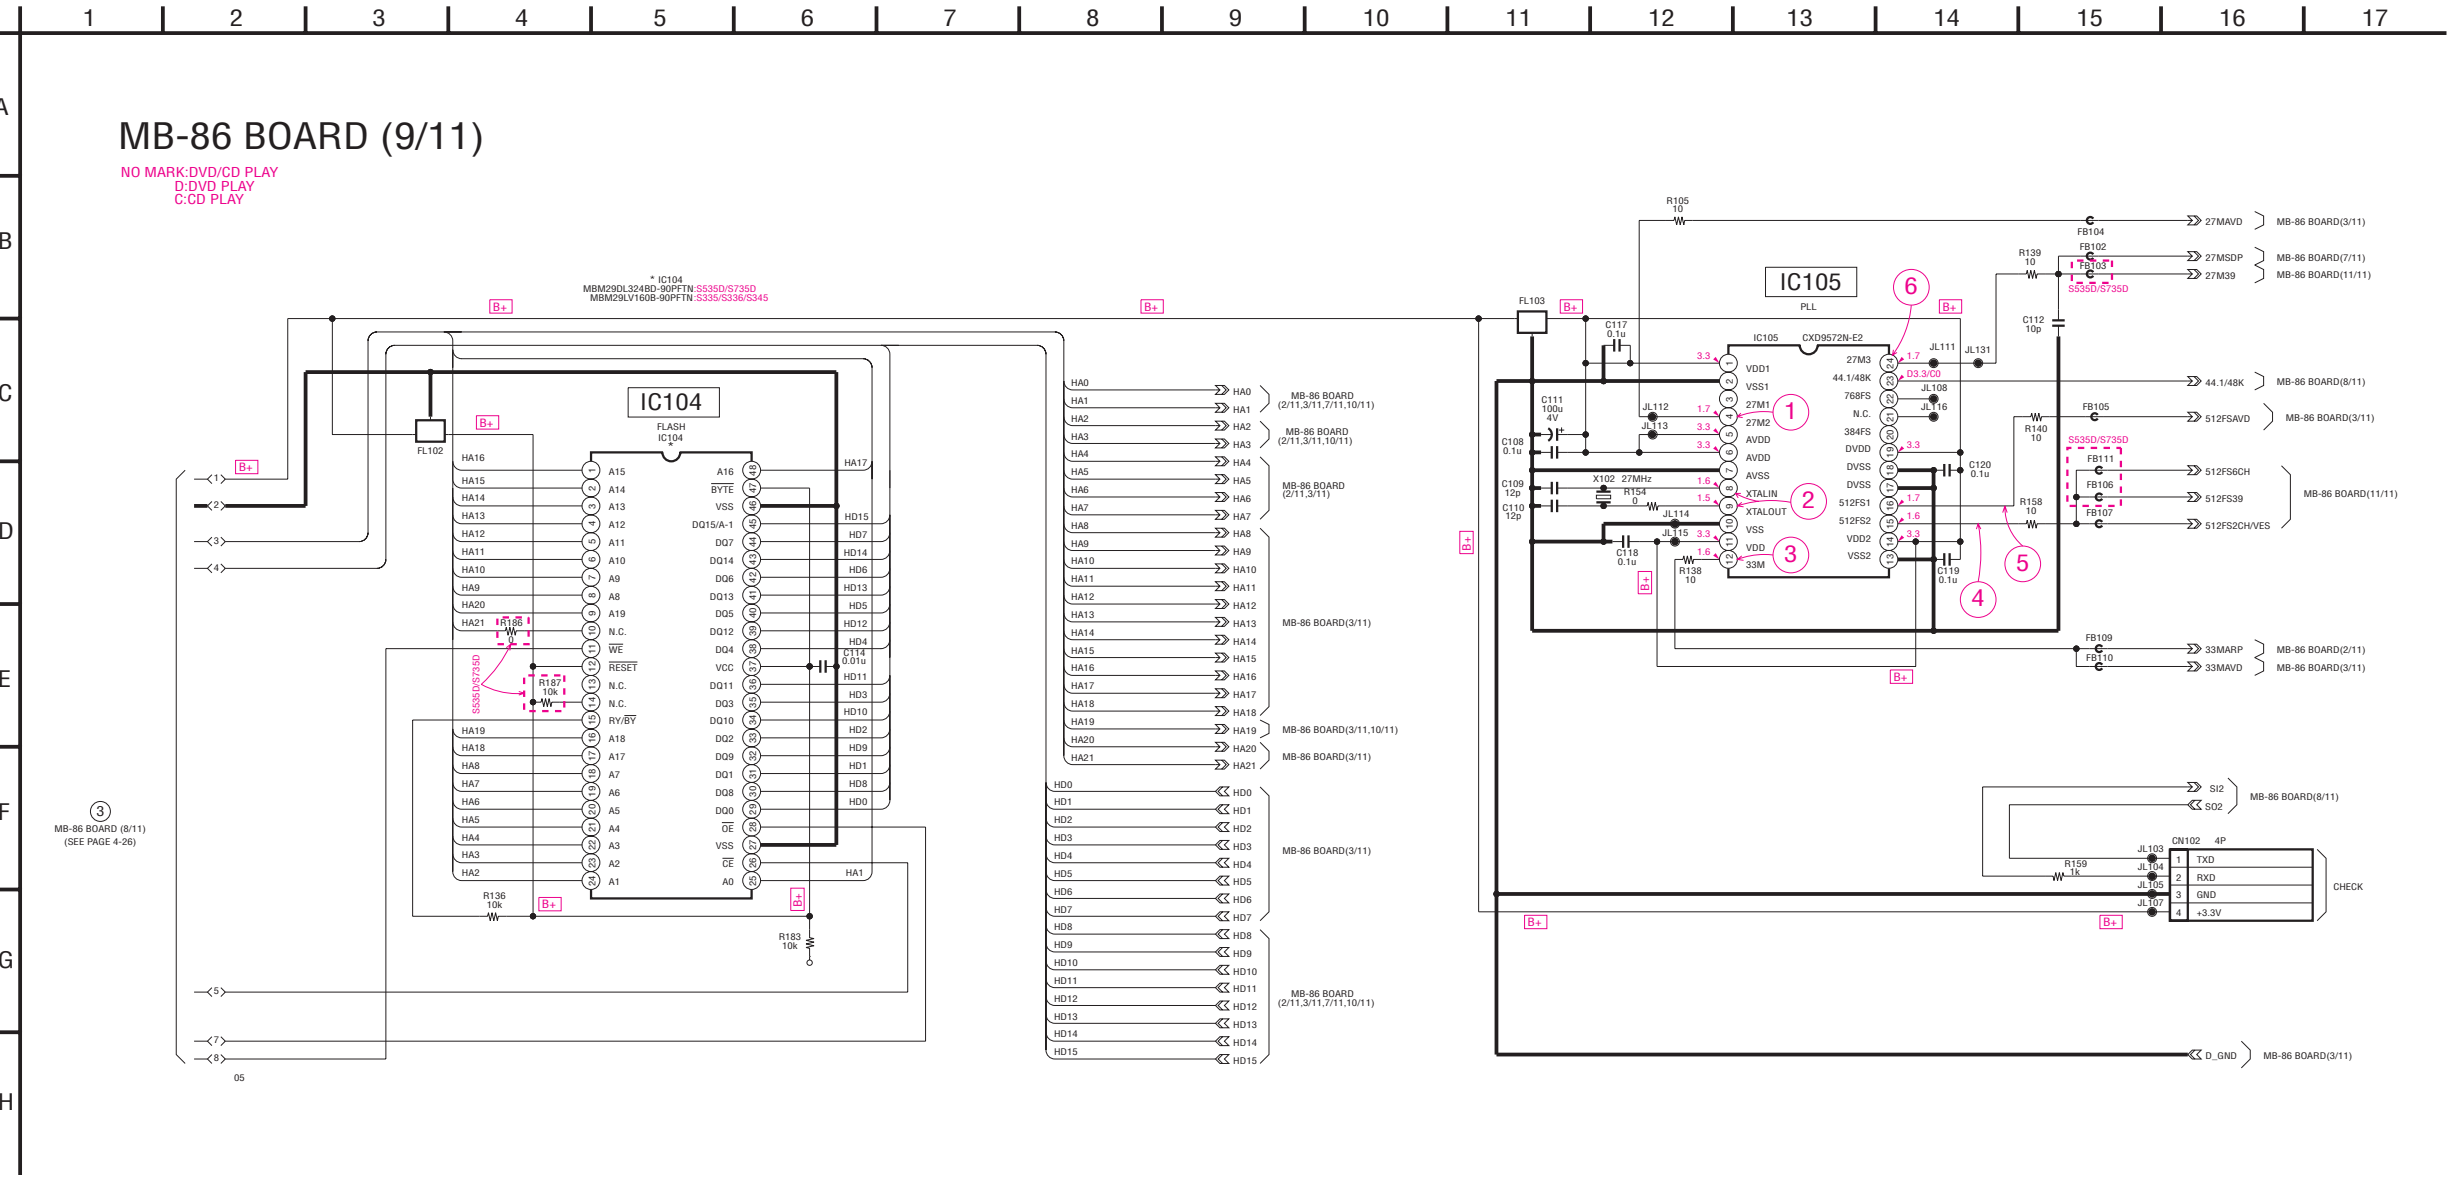


- **Waveforms**

❶ IC105 ❷




5.2 Vp-p (27 MHz)

② IC105 ⑧, ⑨




2.5 Vp-p (27 MHz)

③ IC105 ⑫




4.9 Vp-p (33.8688 MHz)

④ IC105 ⑮




DVD : 3.4 Vp-p (29.5 MHz)
CD : 3.4 Vp-p (22.58 MHz)

5 IC105 16



DVD : 4.3 Vp-p (29.5 MHz)
CD : 4.3 Vp-p (22.58 MHz)


⑥ IC105 ②④




4.9 Vp-p (27.2 MHz)

MB-86 (FGA) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.

– Ref. No.: MB-86 board; 1,000 series –

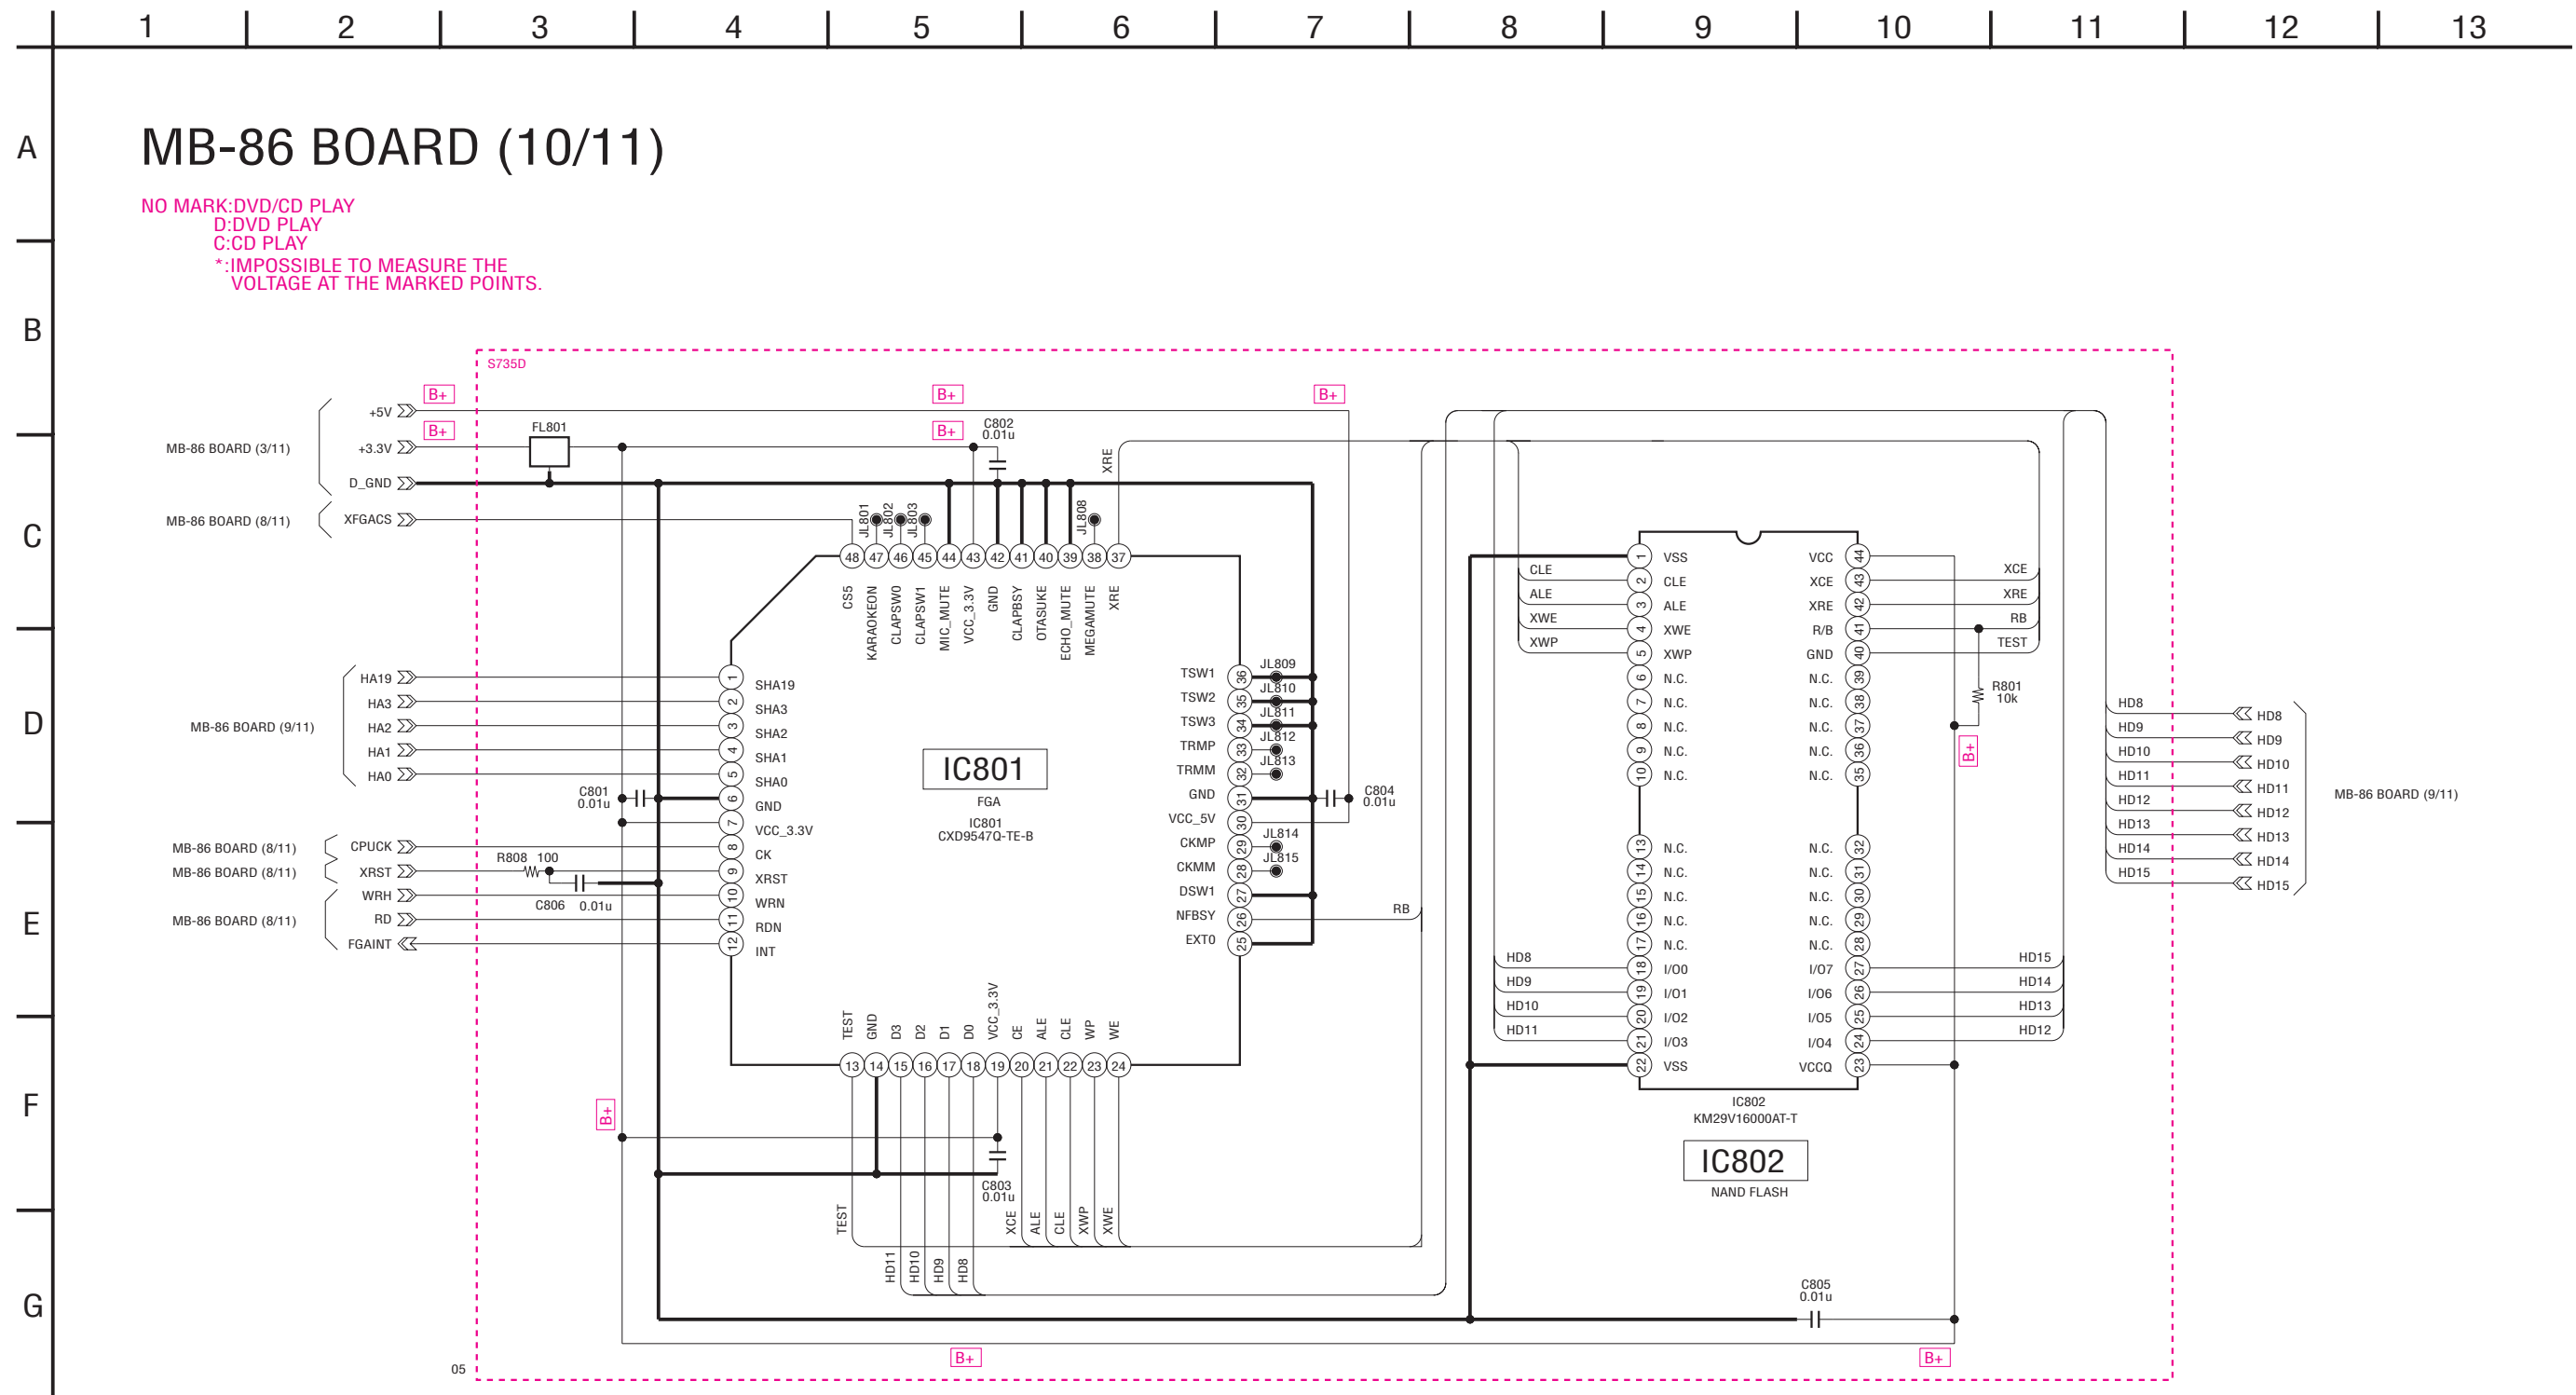

MB-86 (AUDIO DSP) SCHEMATIC DIAGRAM • See page 4-7 for printed wiring board.
– Ref. No.: MB-86 board; 1,000 series –

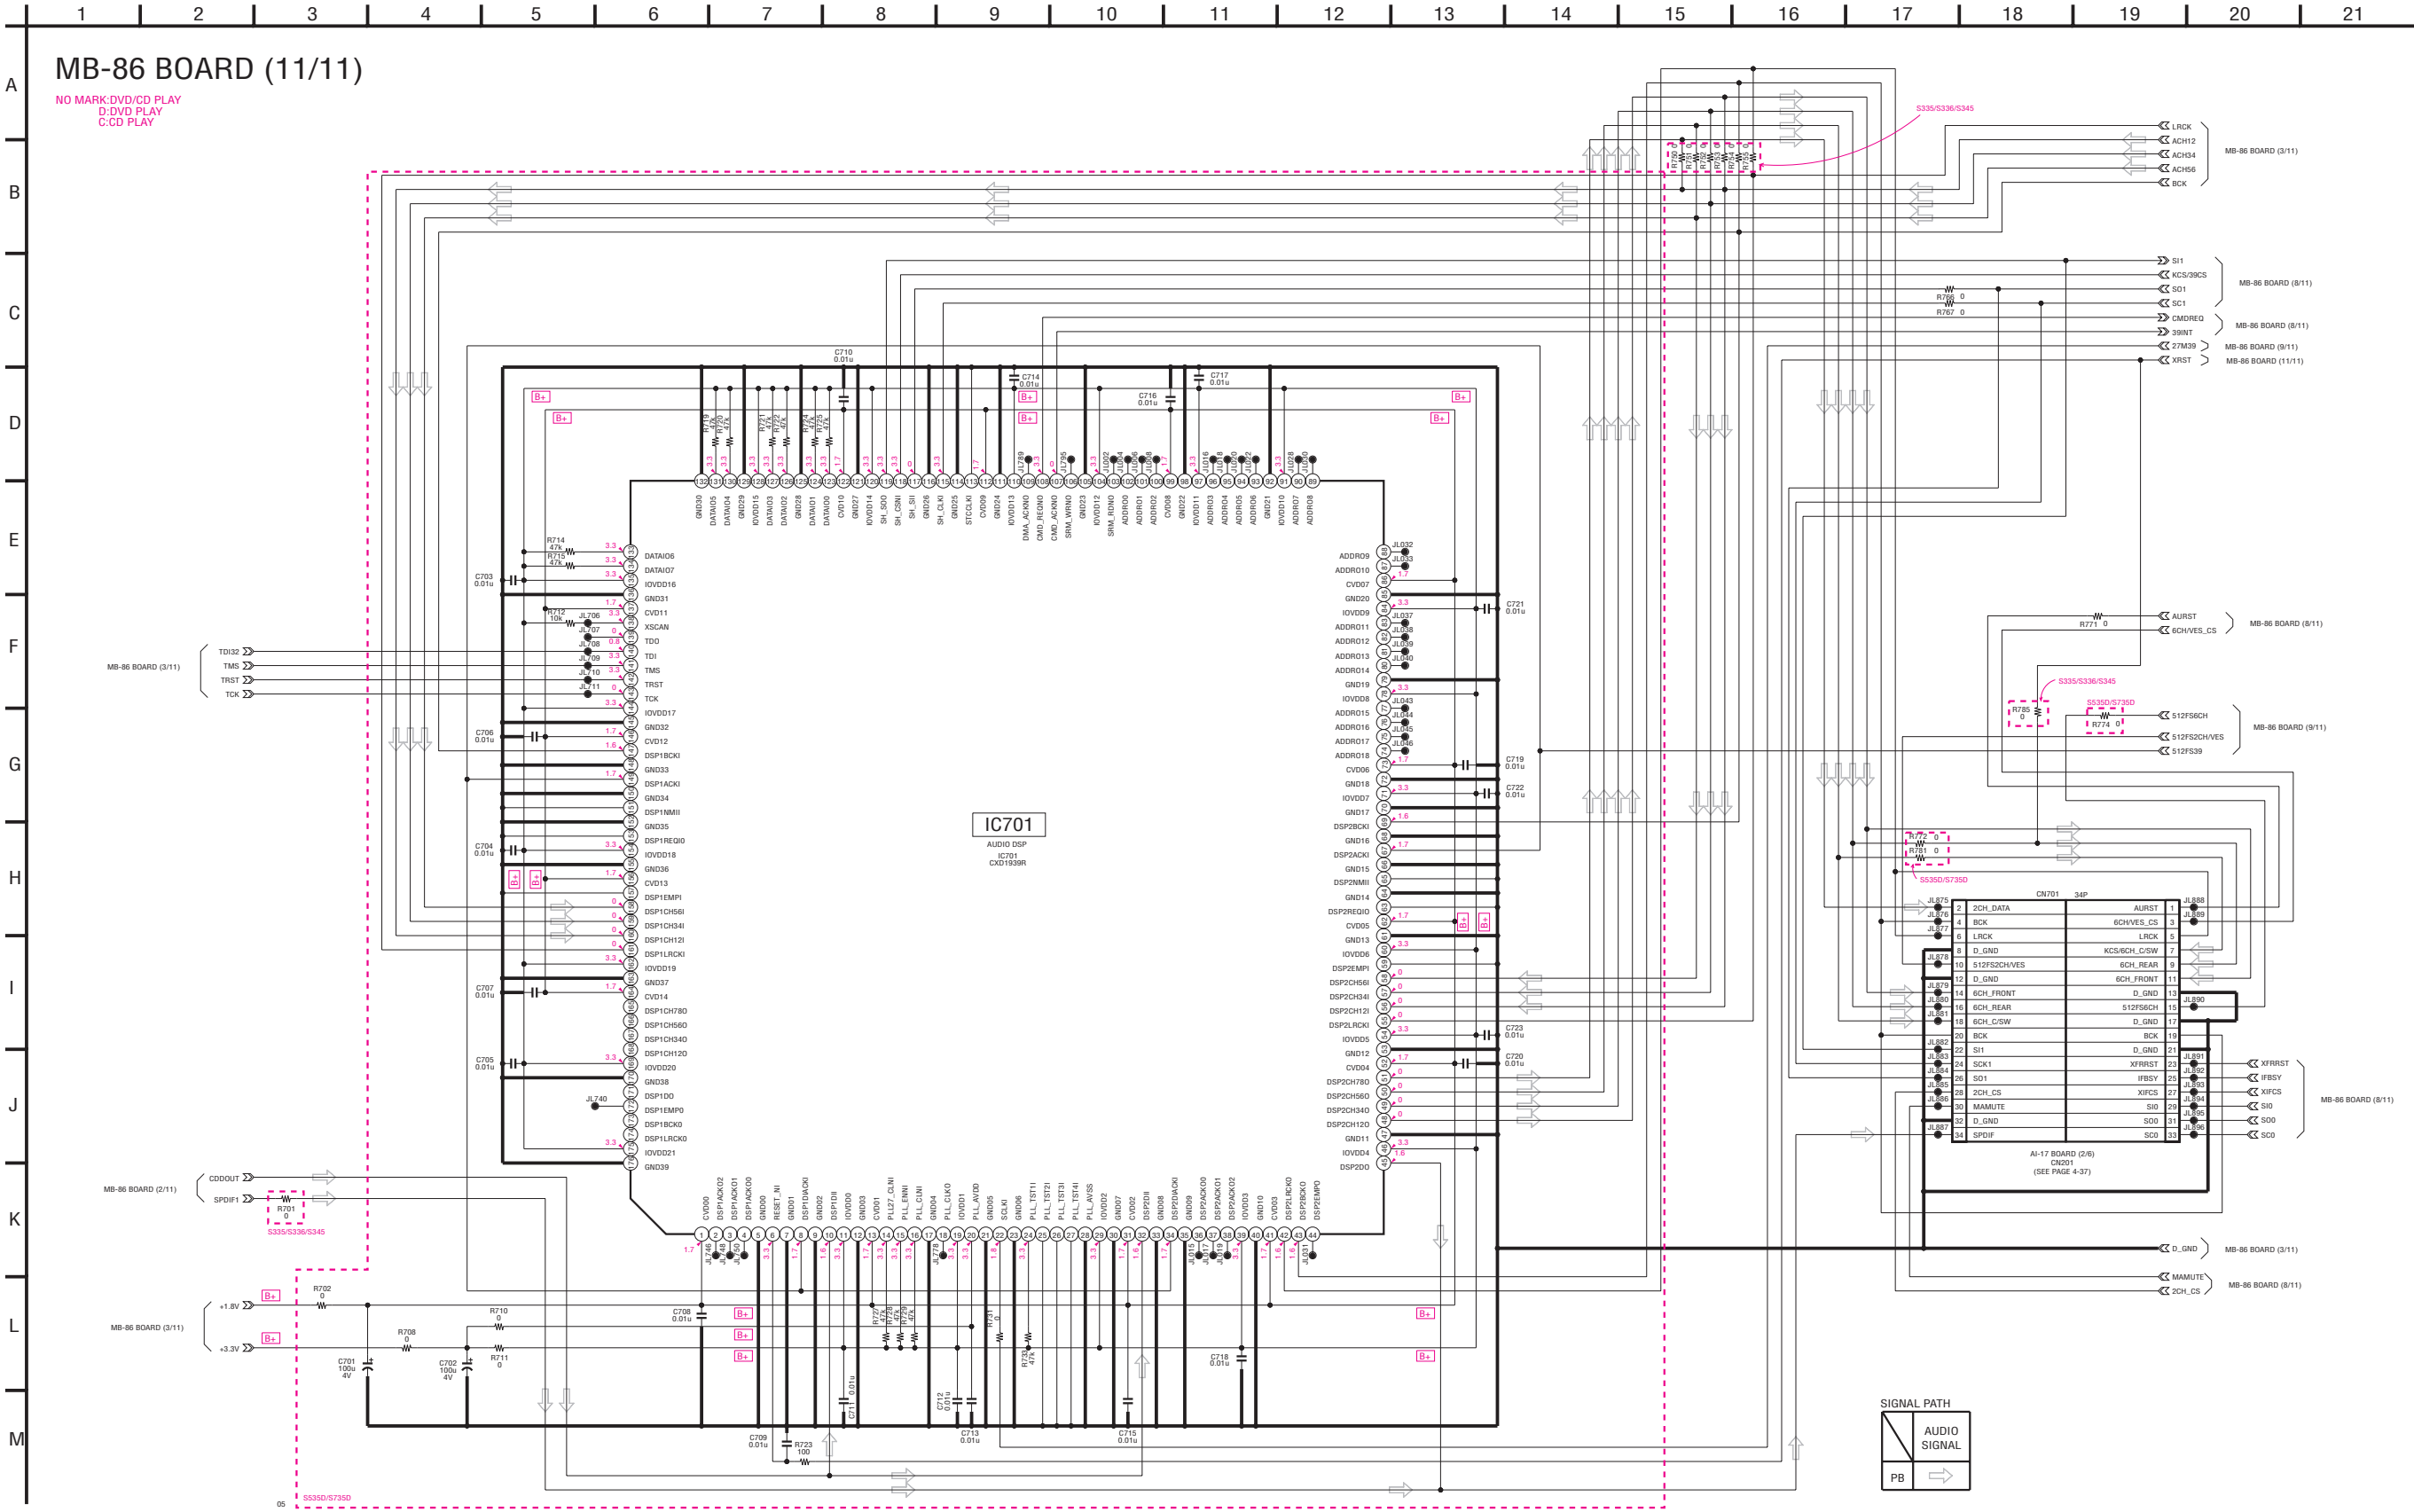


AI-17 BOARD



CN101	C-5	IC302	G-4
CN102	B-10	IC303	D-1
CN201	F-5	IC304	F-2
CN205	B-6	IC305	G-2
CN401	F-13	IC306	A-5
CN403	H-4	IC307	A-4
CN404	H-13	IC401	I-13
CN405	H-2	IC403	G-11
		IC404	G-7
D101	B-9	IC406	F-11
D103	A-9	IC407	F-12
D104	A-9		
D105	A-8	Q106	C-9
D106	A-9	Q107	C-9
D160	C-11	Q160	B-11
D161	C-11	Q161	B-11
D162	C-11	Q162	C-11
D163	C-11	Q201	C-3
D164	C-11	Q202	C-3
D201	C-2	Q203	B-3
D202	D-9	Q204	B-3
D203	B-2	Q205	B-2
D205	B-3	Q206	C-2
D302	C-1	Q207	B-2
D303	C-1	Q208	E-9
D306	A-4	Q209	E-9
D406	I-1	Q210	C-3
D407	I-11	Q211	C-2
D408	I-11	Q212	C-2
D409	I-11	Q213	E-10
D410	I-11	Q214	D-11
D411	G-11	Q215	E-10
D412	I-13	Q220	E-10
D413	I-13	Q221	E-10
D415	I-12	Q301	C-1
D416	G-6	Q302	B-1
D417	H-12	Q303	B-1
D430	G-13	Q304	A-3
		Q305	A-3
IC101	B-8	Q306	A-2
IC102	C-10	Q307	A-2
IC103	B-10	Q308	A-1
IC201	E-3	Q309	A-1
IC203	C-2	Q311	B-4
IC204	F-3	Q312	A-6
IC205	D-5	Q313	A-6
IC206	D-4	Q314	A-5
IC207	F-9	Q401	H-11
IC208	D-3	Q402	H-11
IC301	F-3		


AI-17 (VIDEO BUFFER) SCHEMATIC DIAGRAM • See page 4-33 for printed wiring board.

– Ref. No.: AI-17 board; 2,000 series –

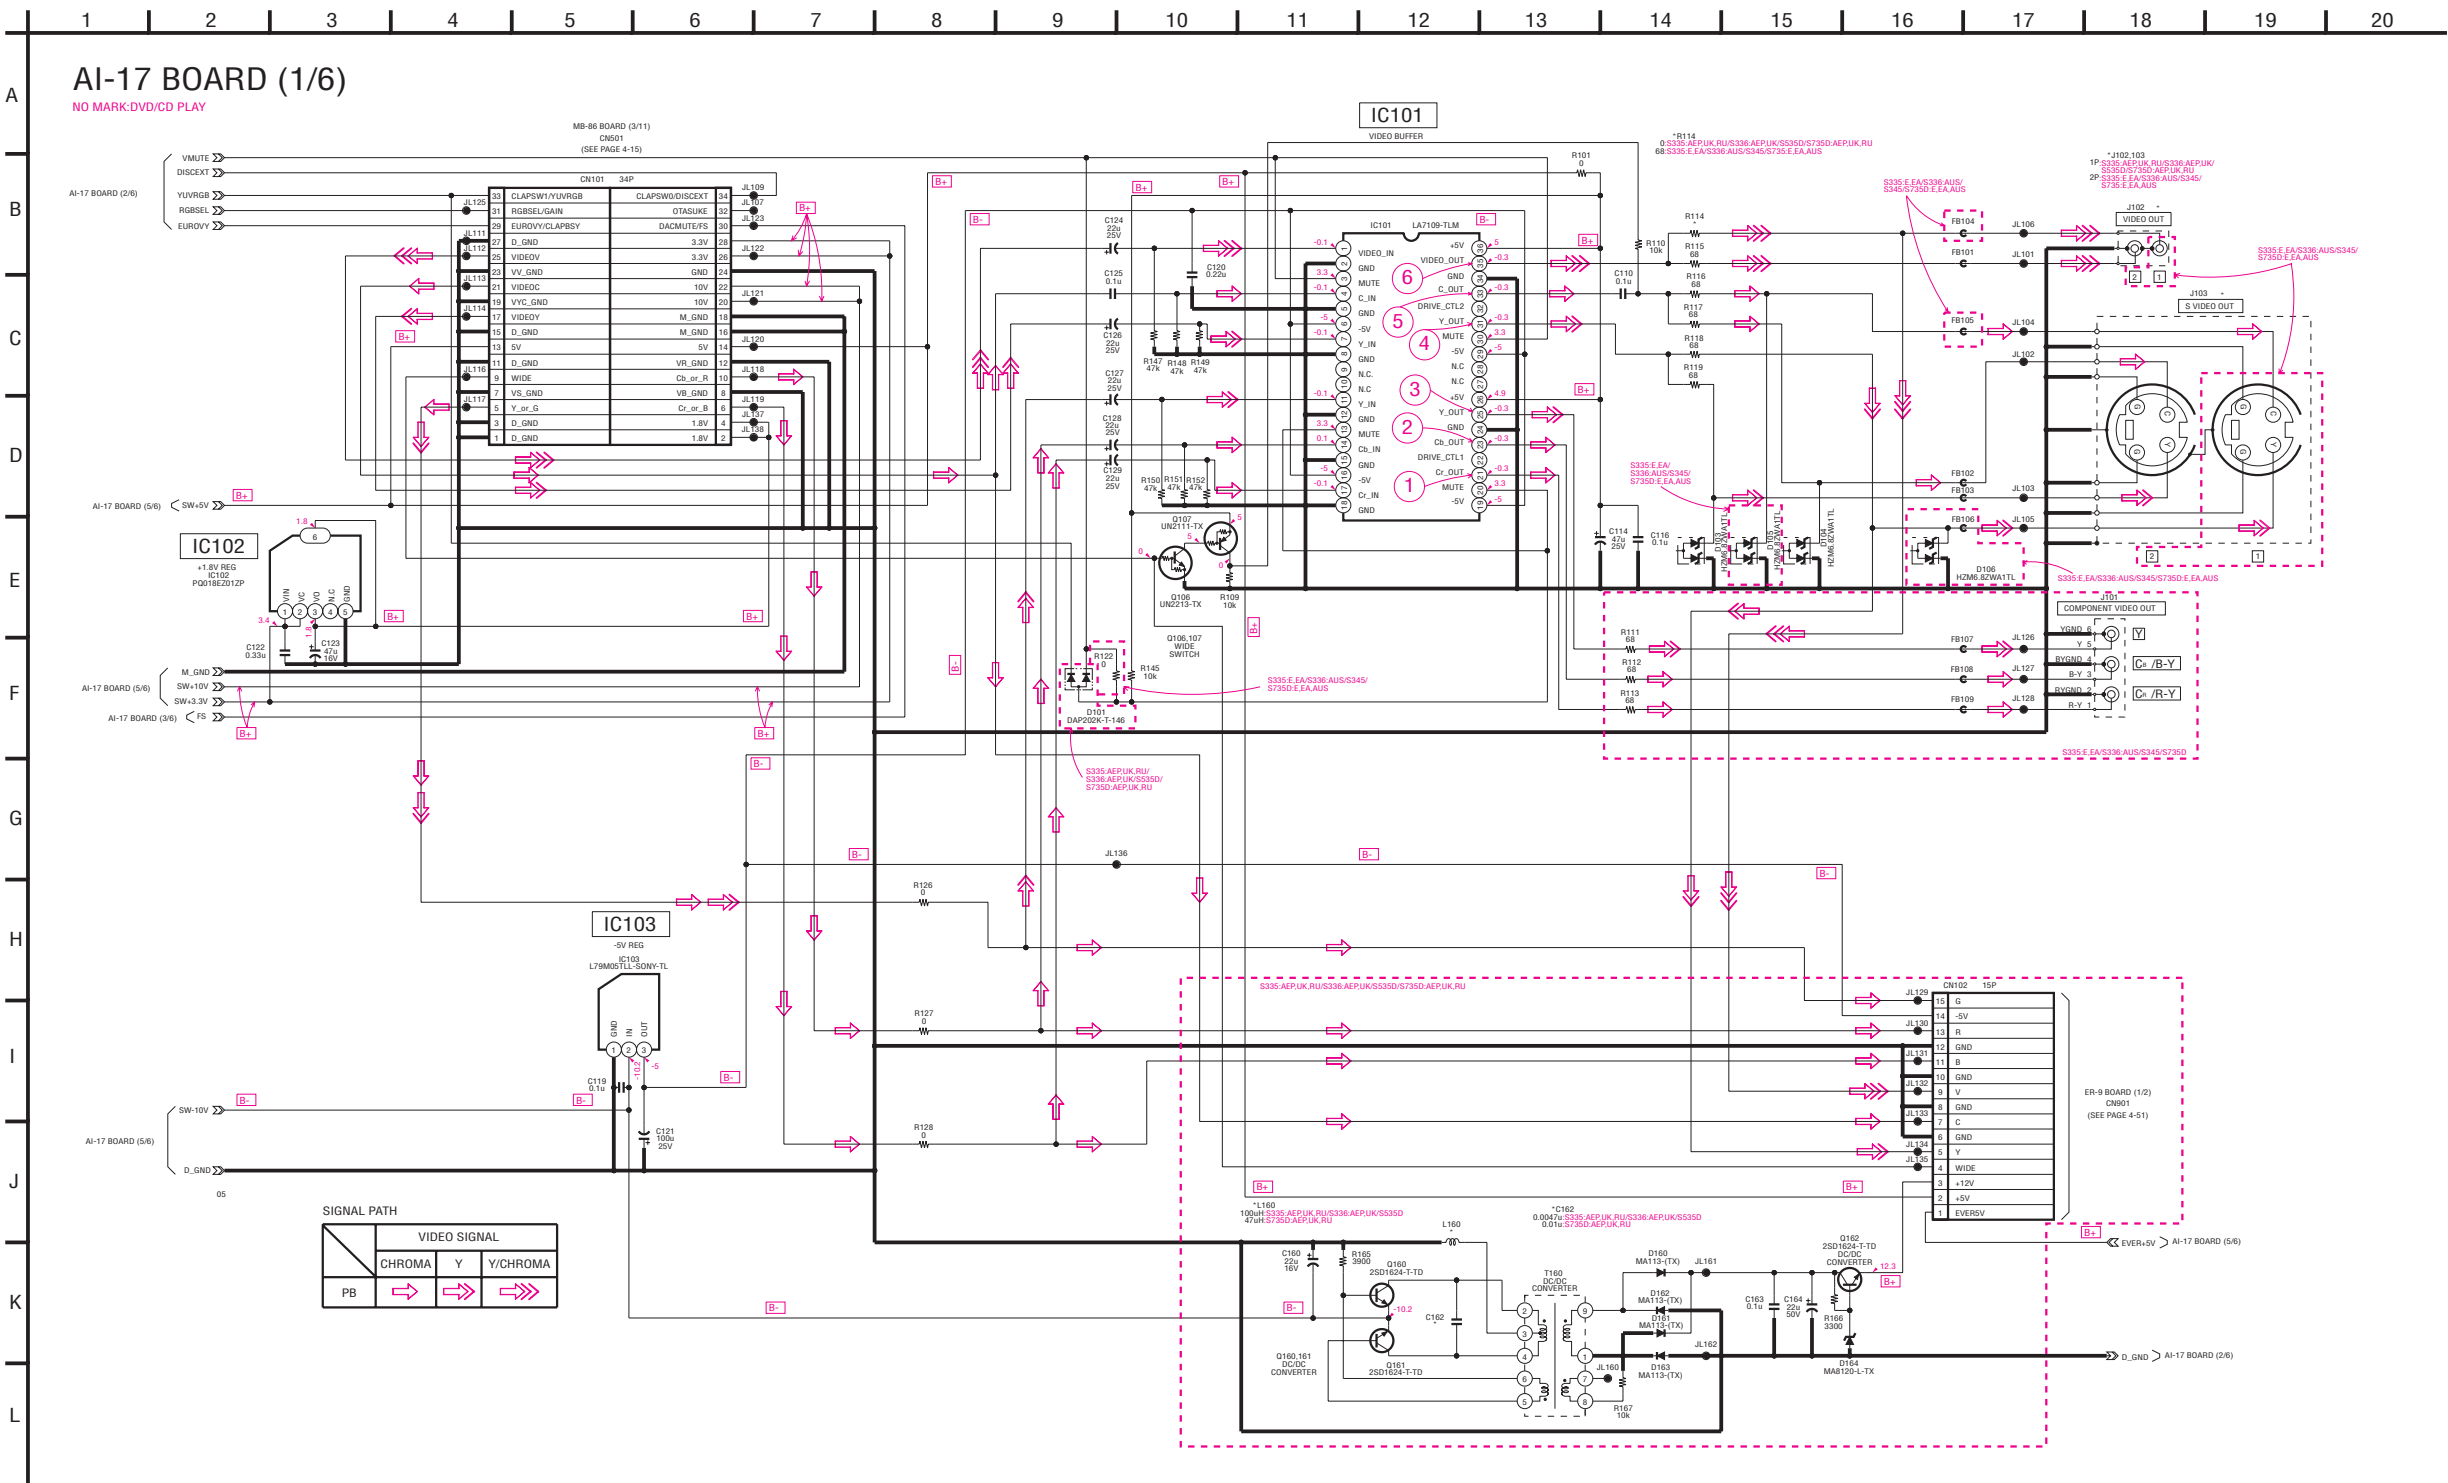


- **Waveforms**

❶ IC101 ❷




728 mVp-p (H)

② IC101 ②③




720 mVp-p (H)

③ IC101 ②⑤




1.0 Vp-p (H)

④ IC101 ③①




2.1 Vp-p (H)

5 IC101 33



520 mVp-p (H)


⑥ IC101 ③⑤



2.4 Vp-p (H)

AI-17 (D/A CONVERTER, DSP) SCHEMATIC DIAGRAM • See page 4-33 for printed wiring board.


– Ref. No.: AI-17 board; 2,000 series –

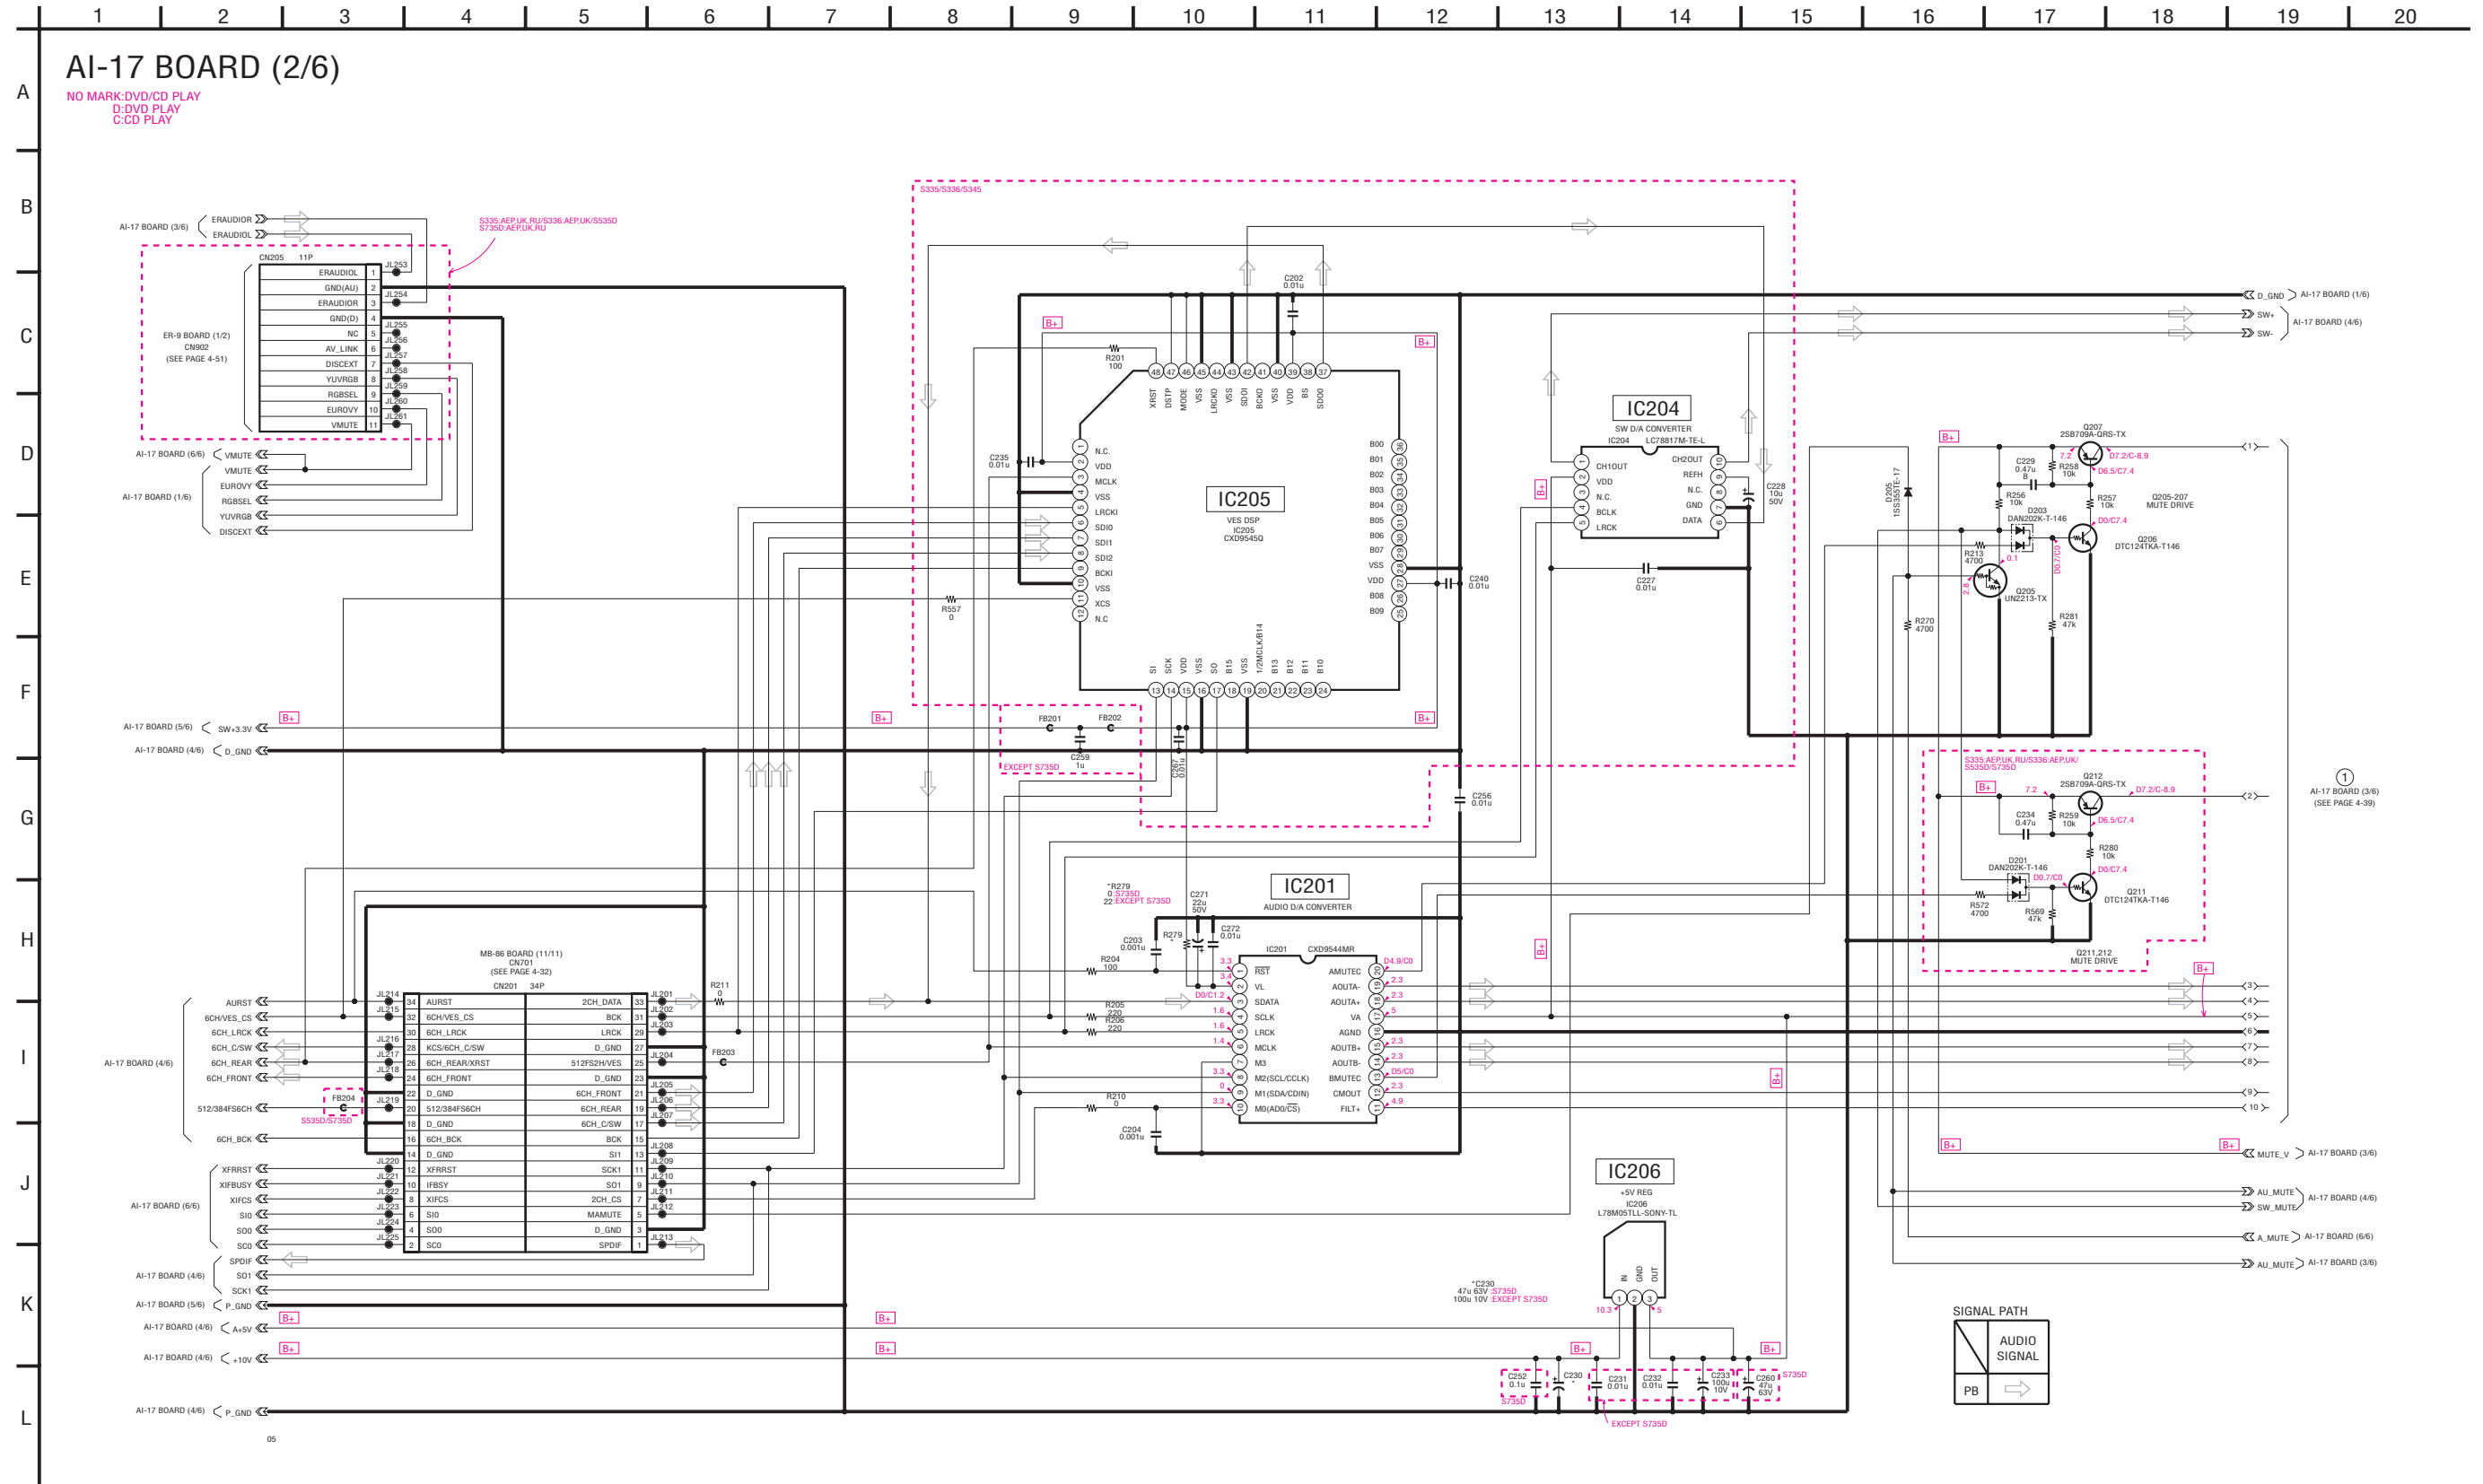





AI-17 (D/A CONVERTER) SCHEMATIC DIAGRAM • See page 4-33 for printed wiring board.

— Ref. No.: AI-17 board; 2,000 series —

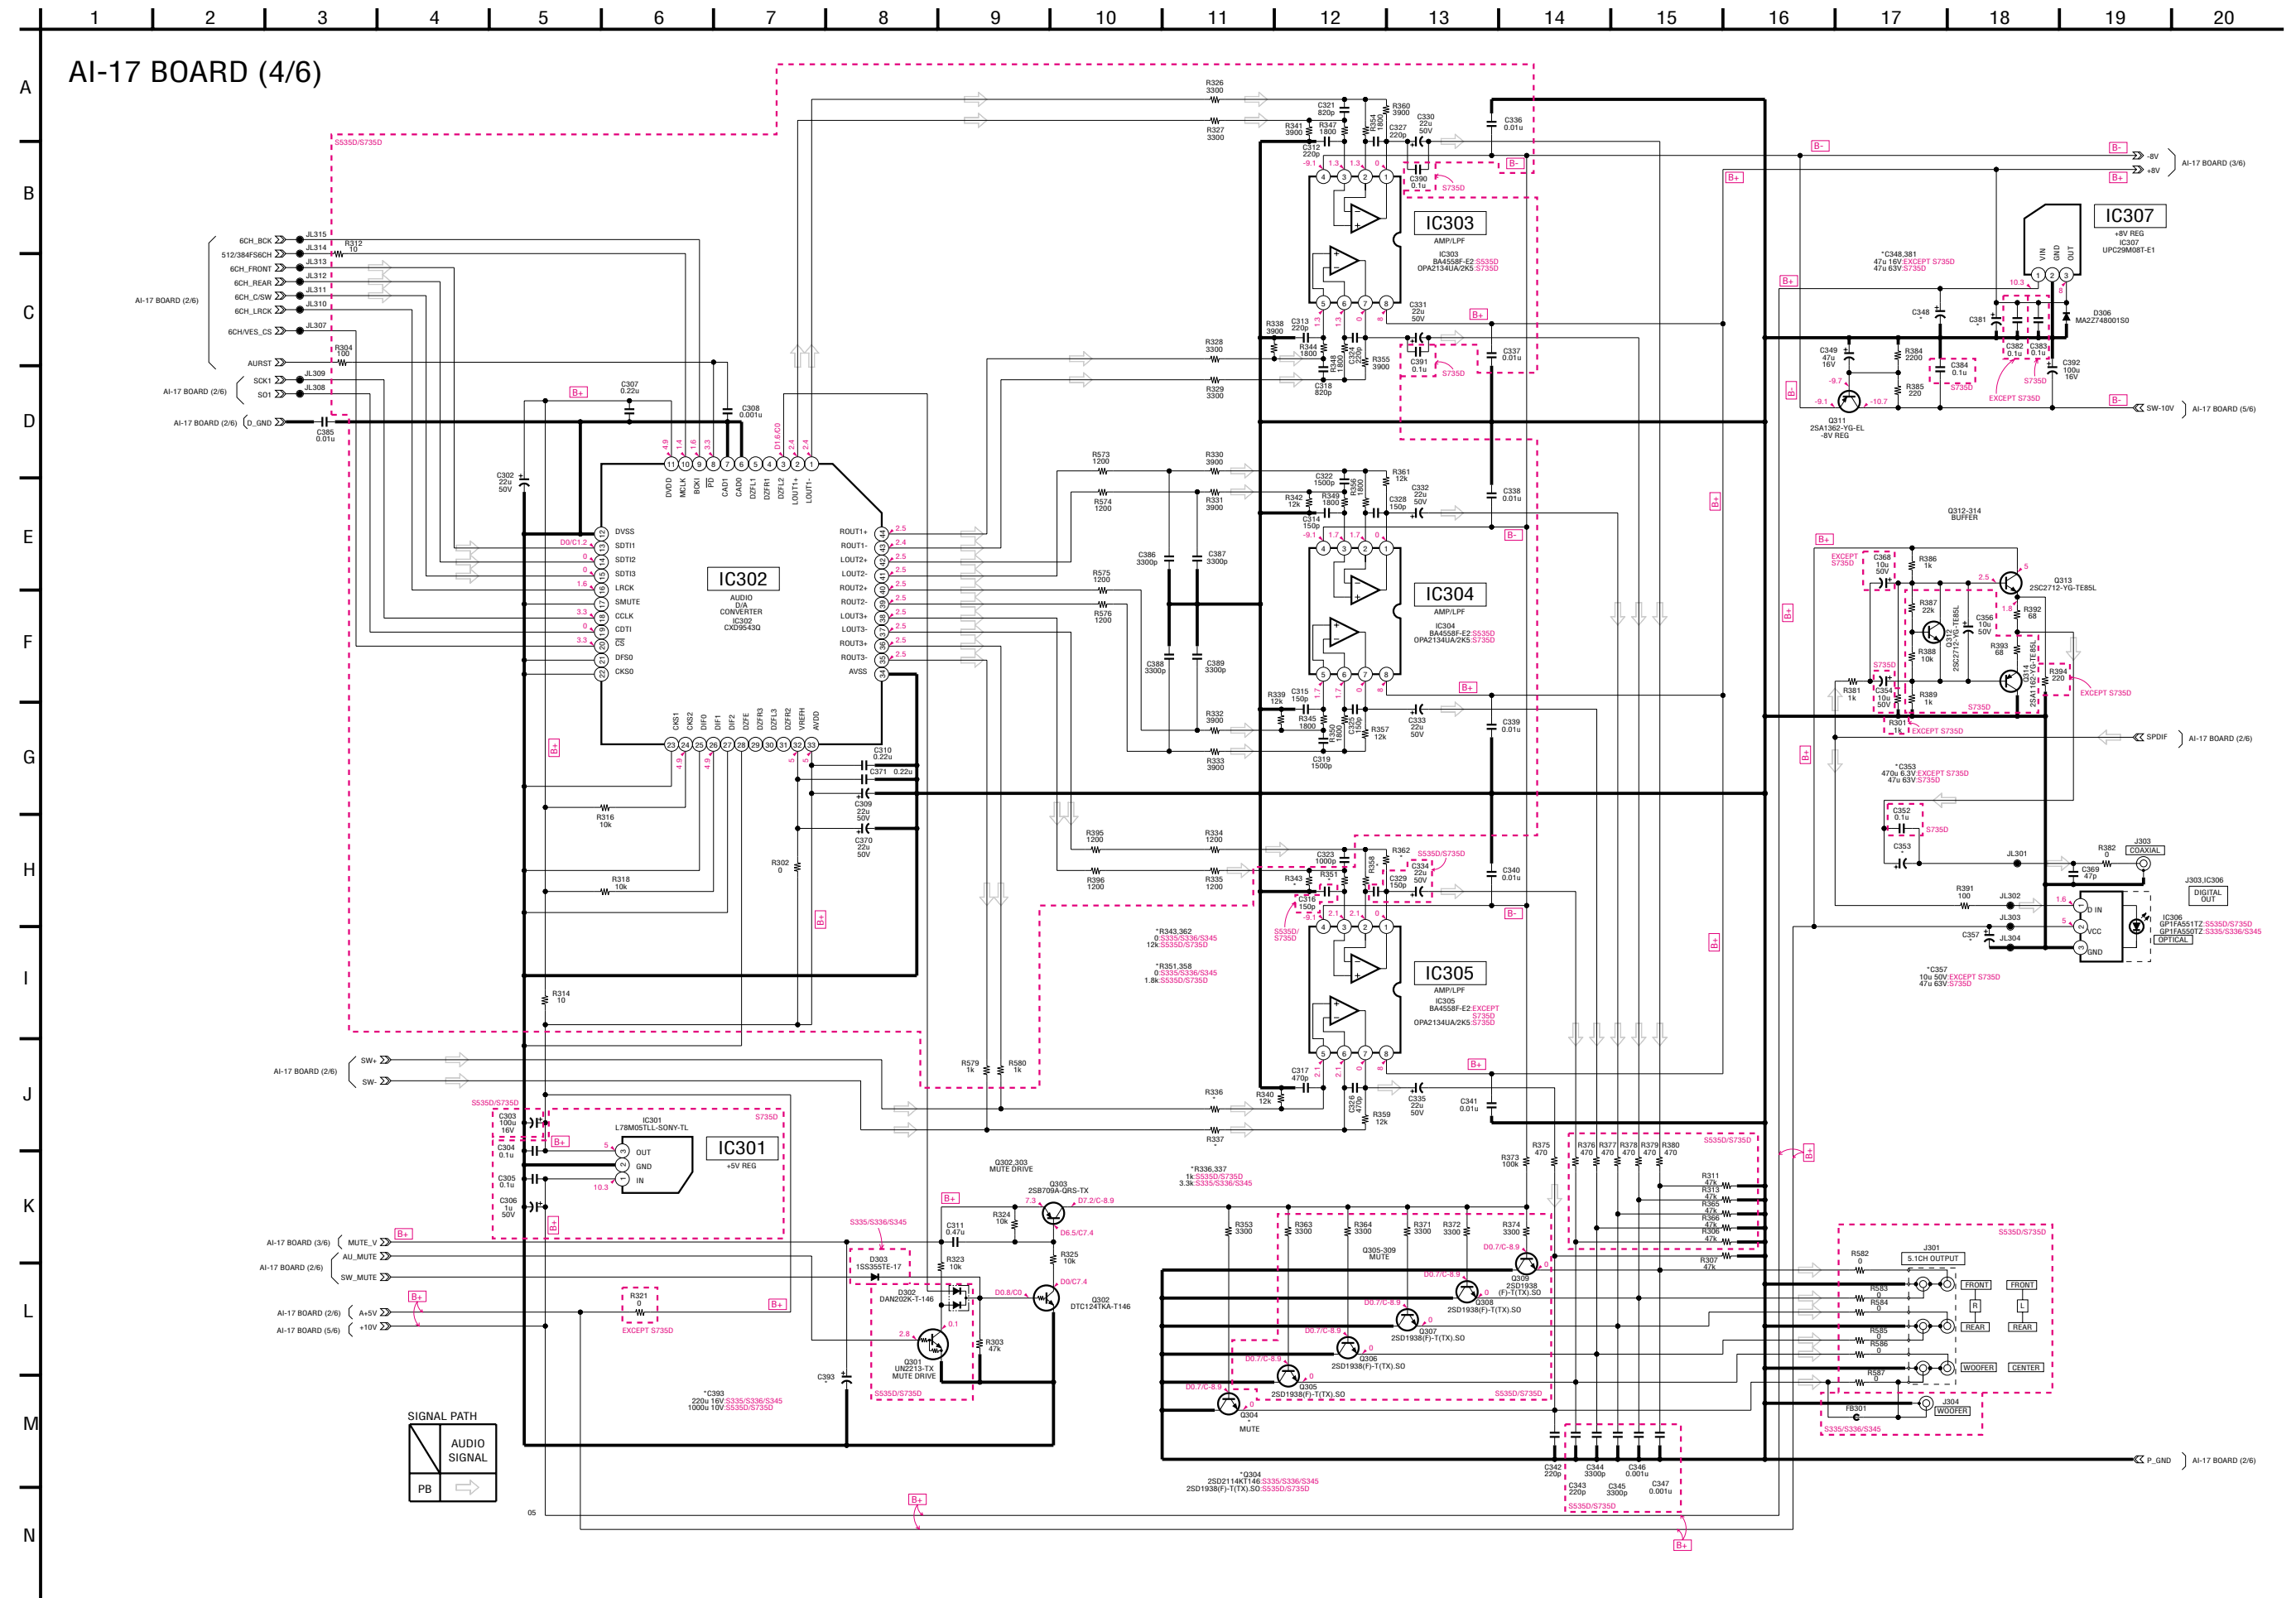

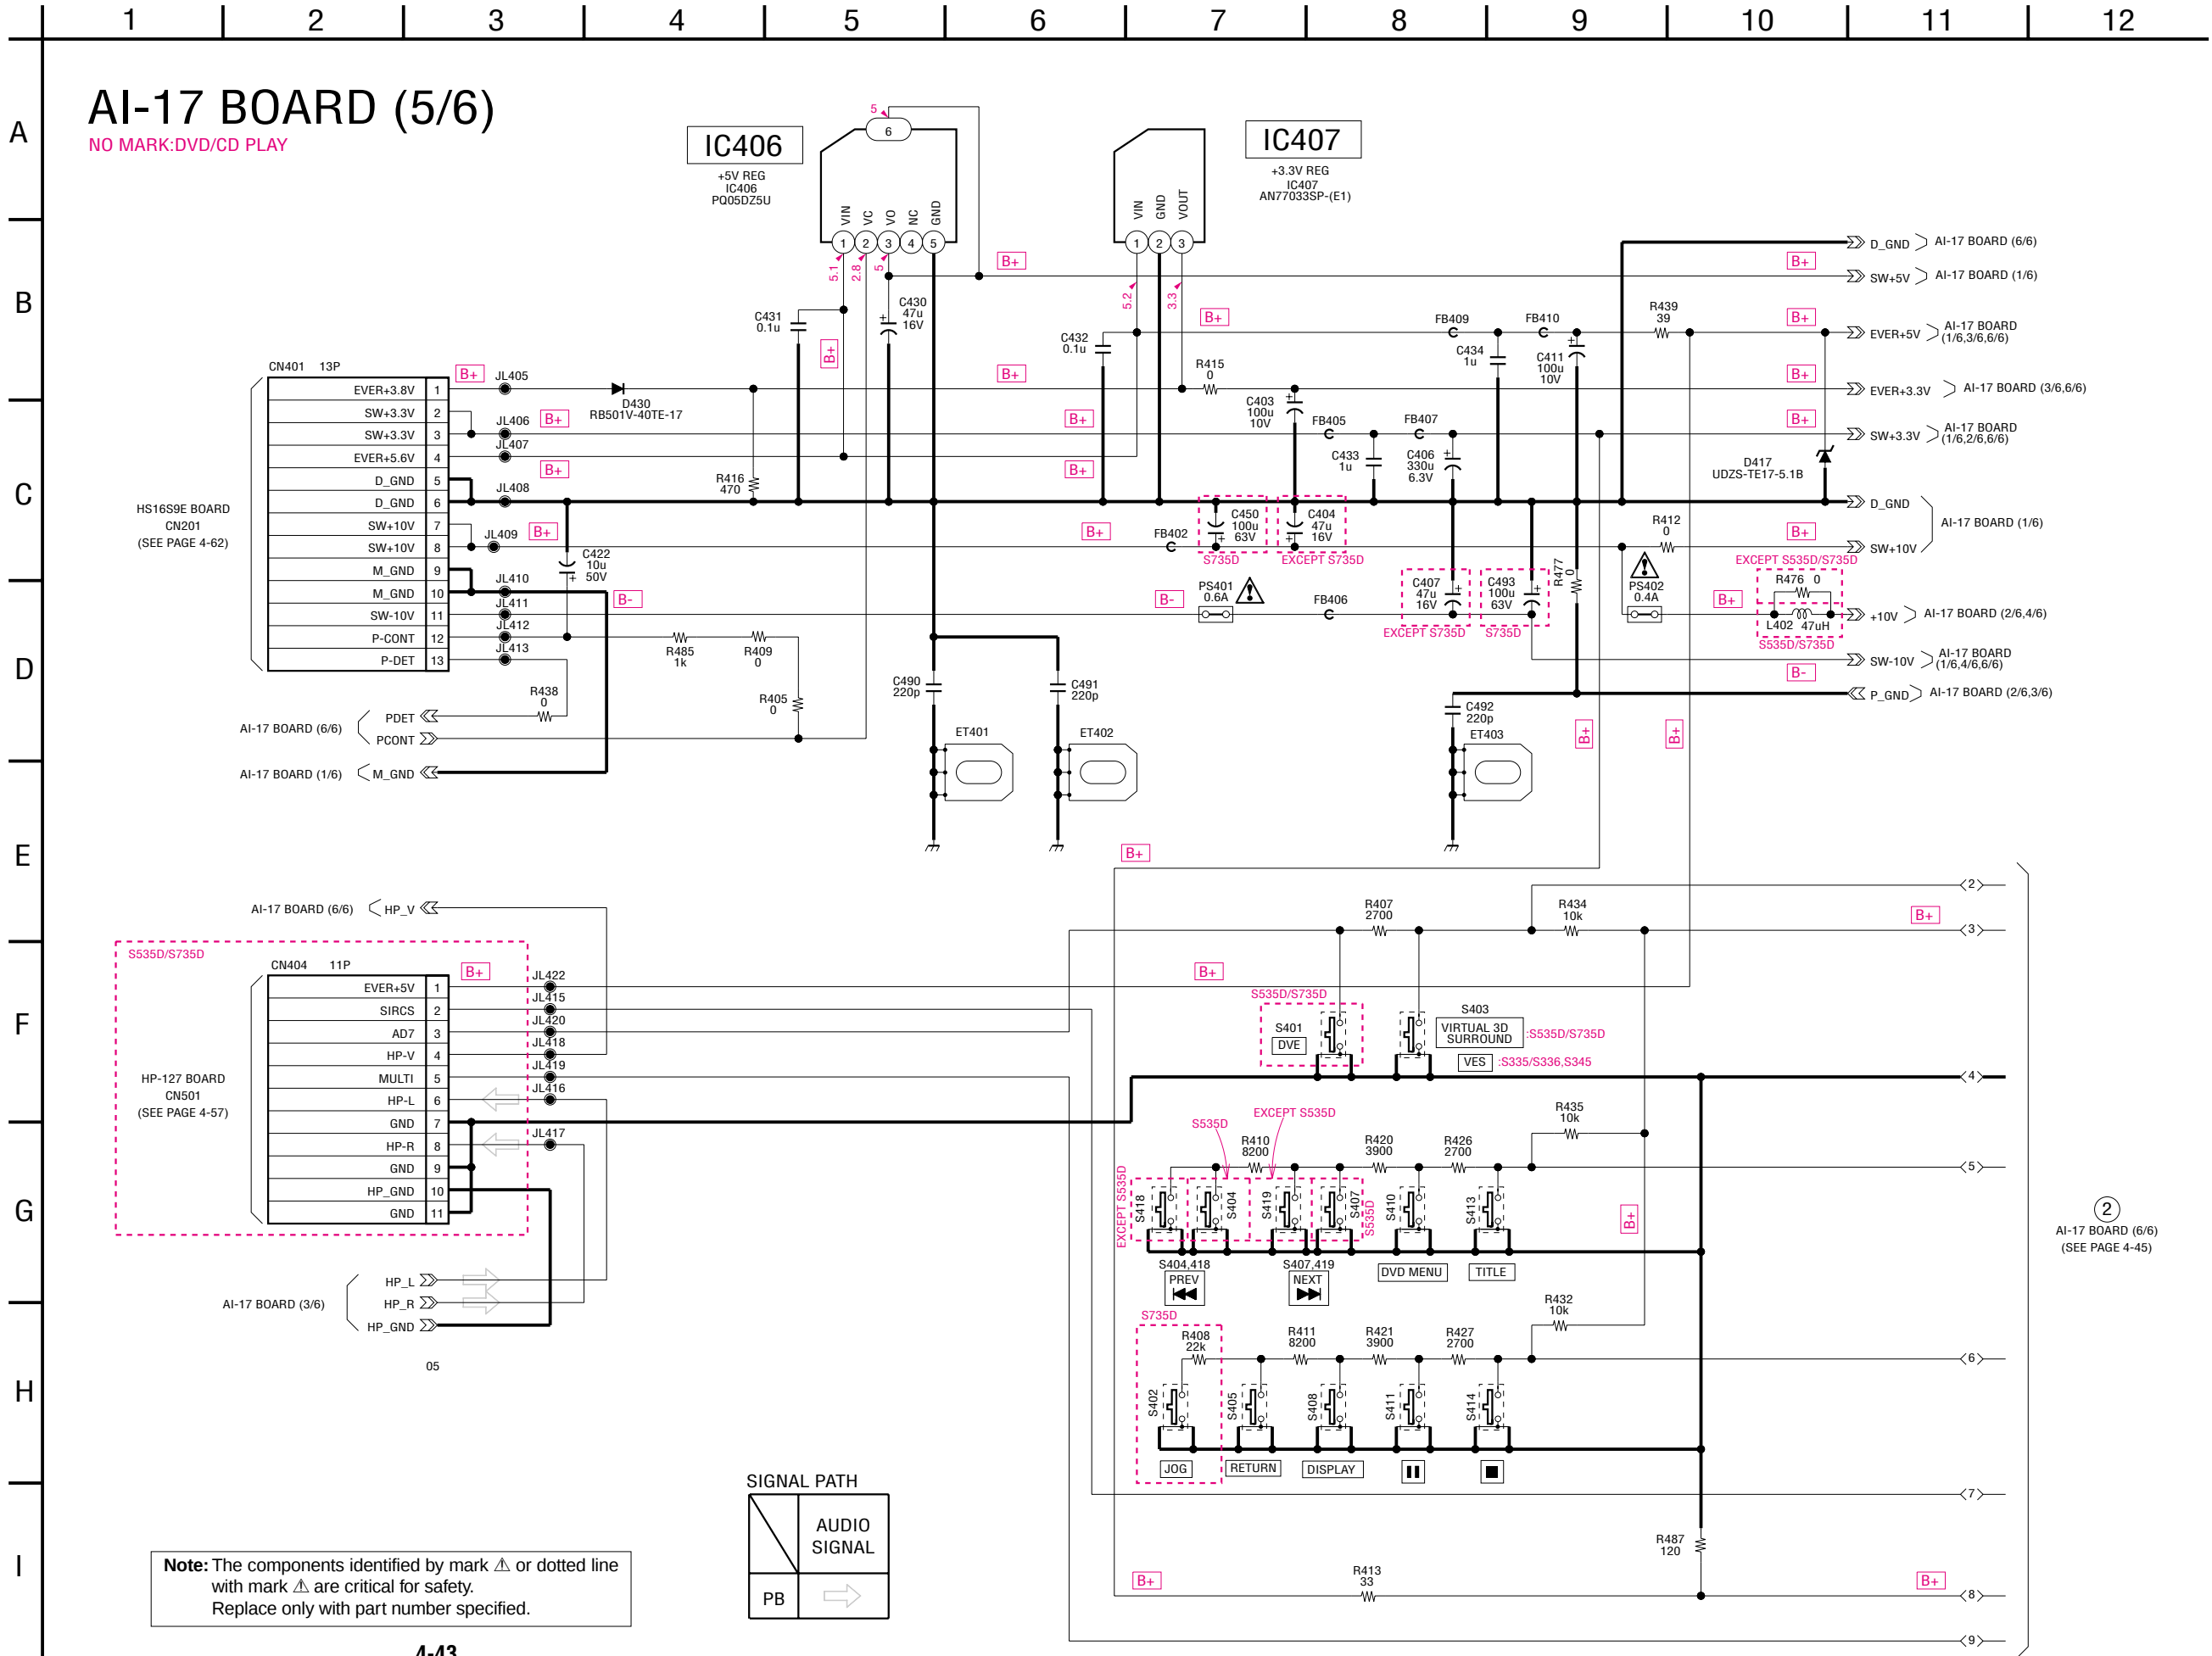



AI-17 (IF CON) SCHEMATIC DIAGRAM
- Ref. No.: AI-17 board; 2,000 series -

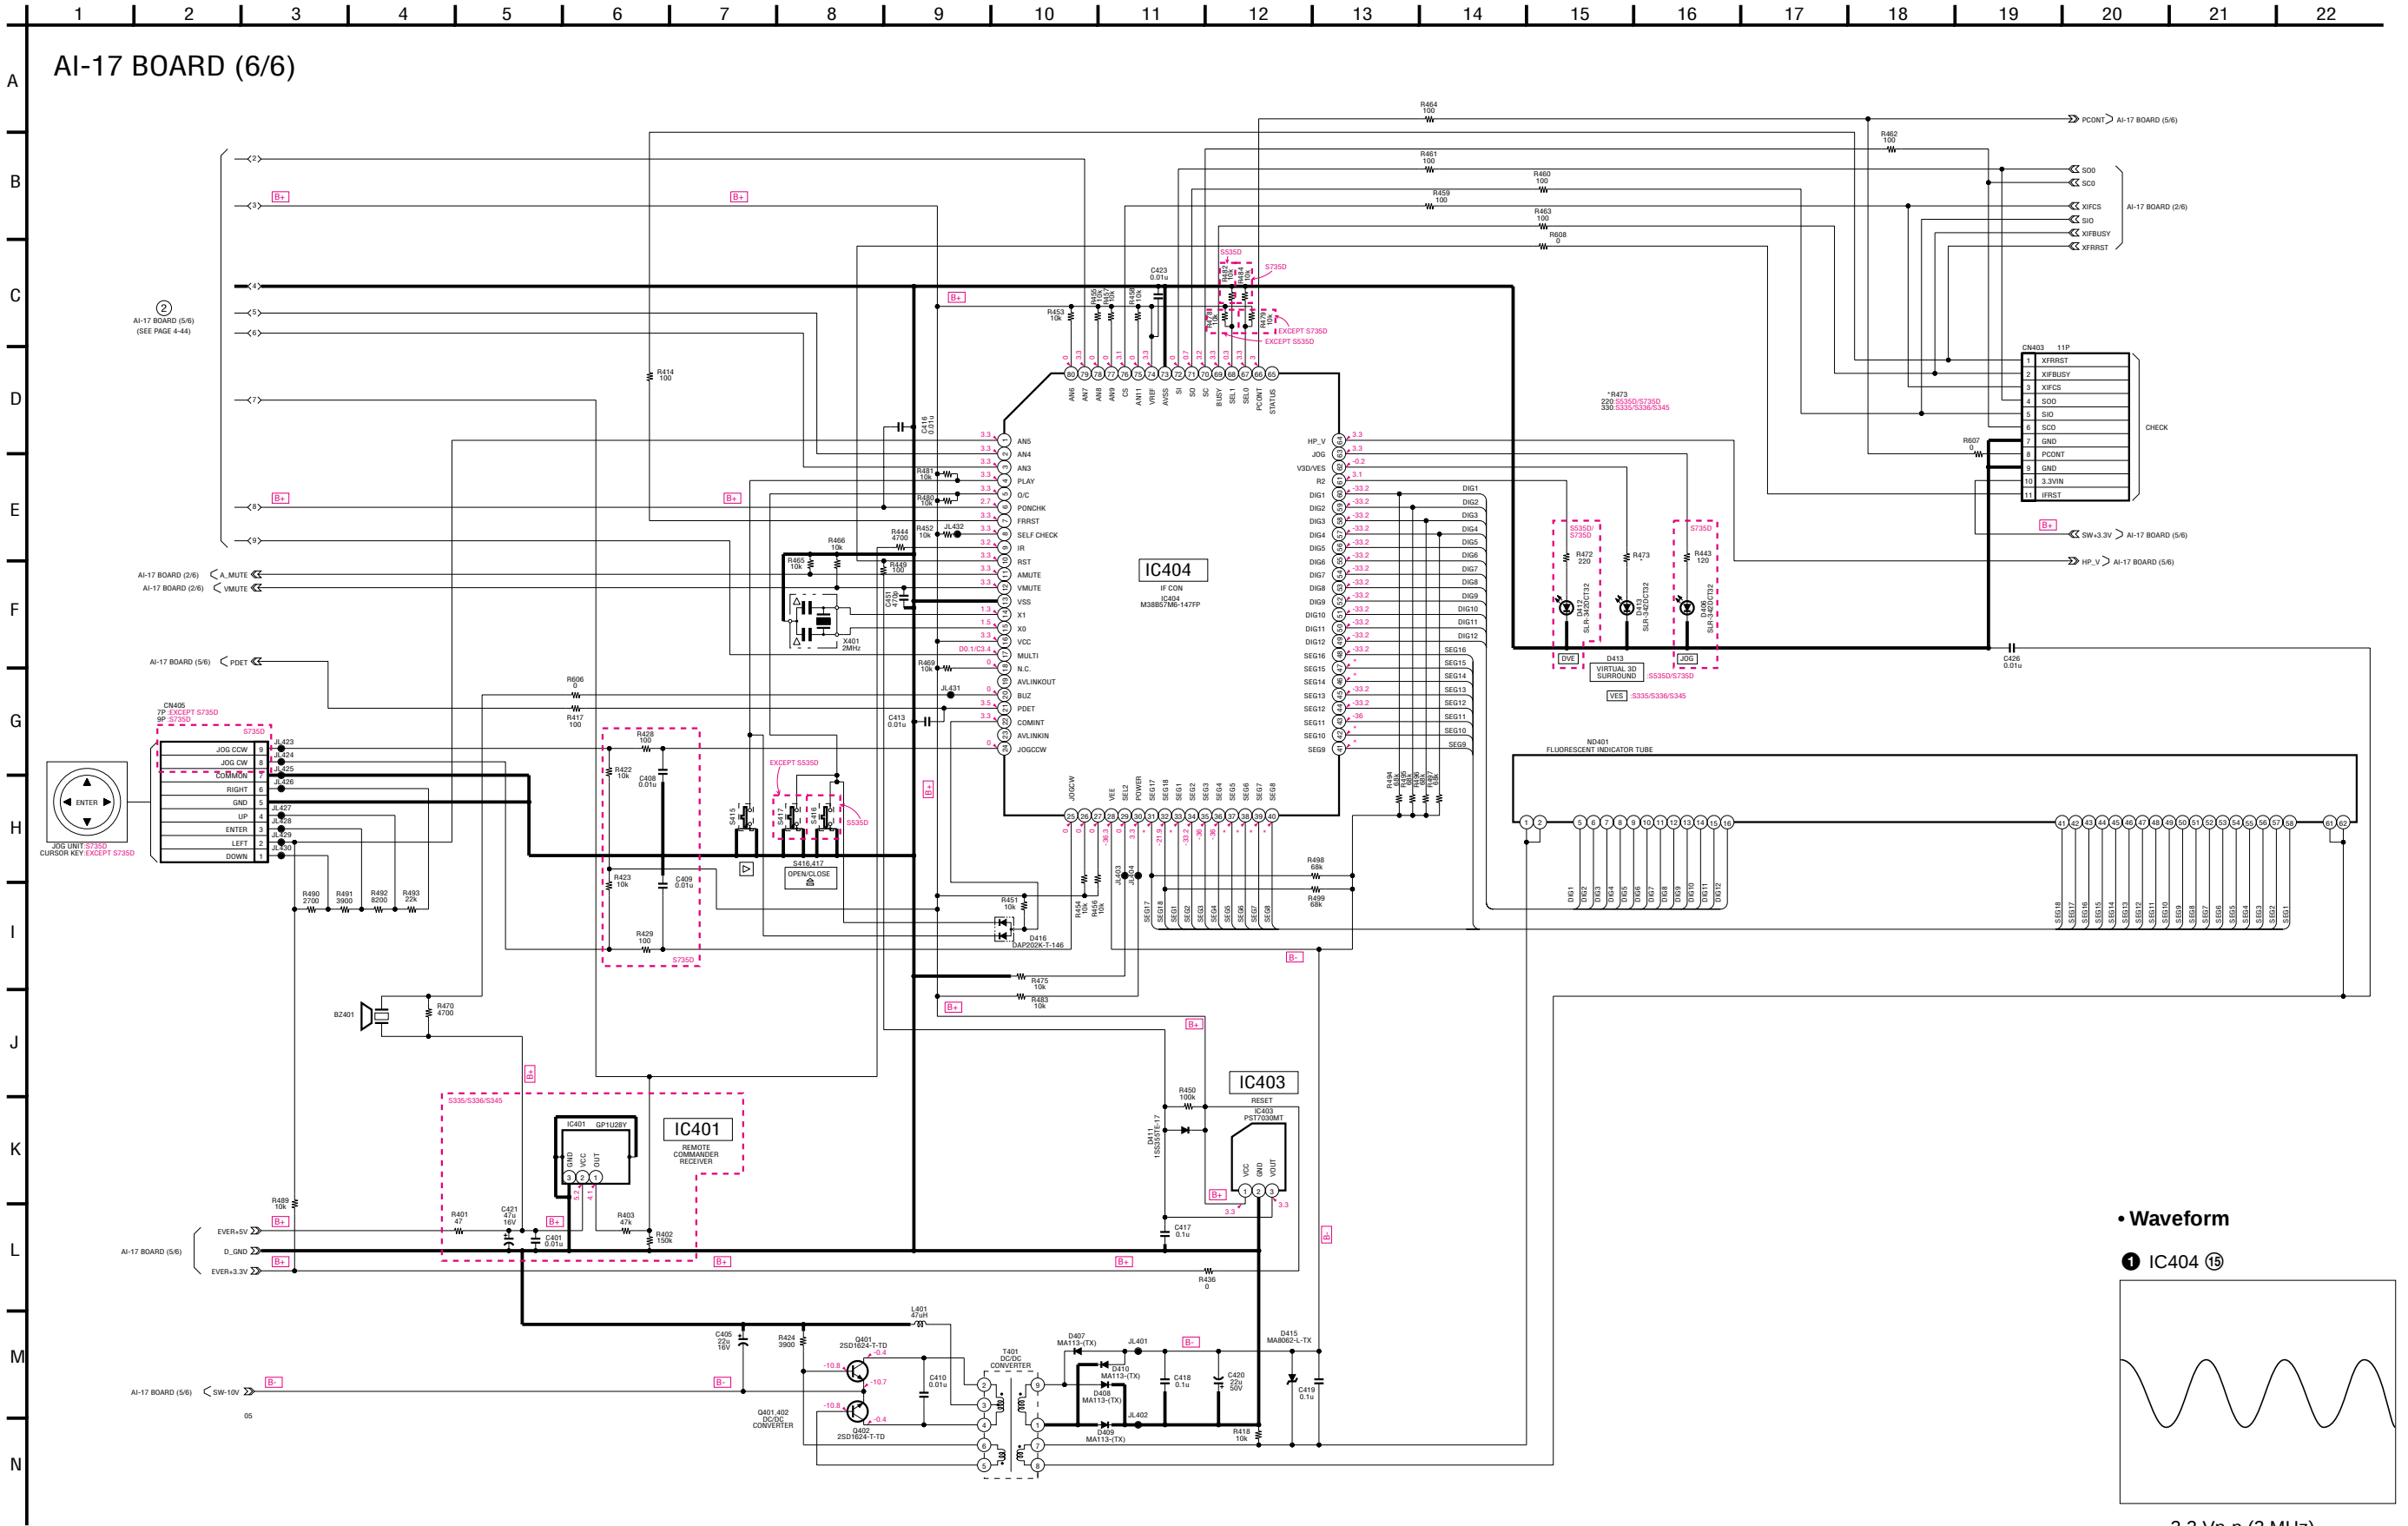


ER-9 (EURO AV) PRINTED WIRING BOARD

- Ref. No.: ER-9 board; 2,000 series -
- DVP-S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU -

There are few cases that the part isn't mounted in this model is printed on this diagram.

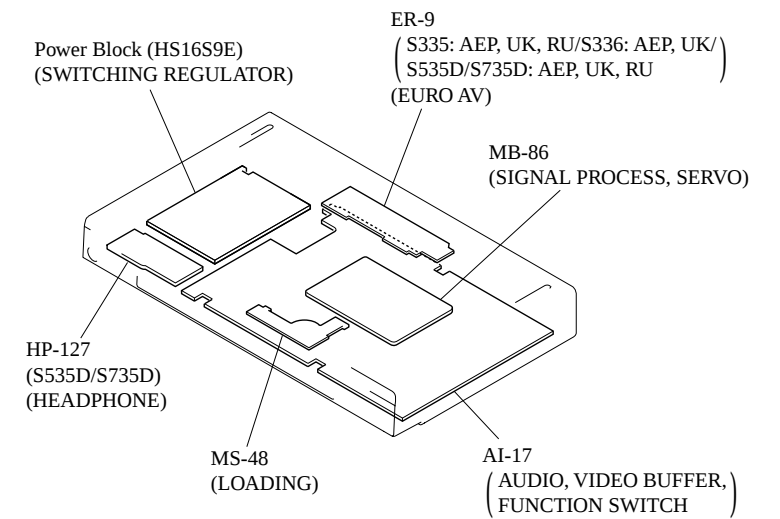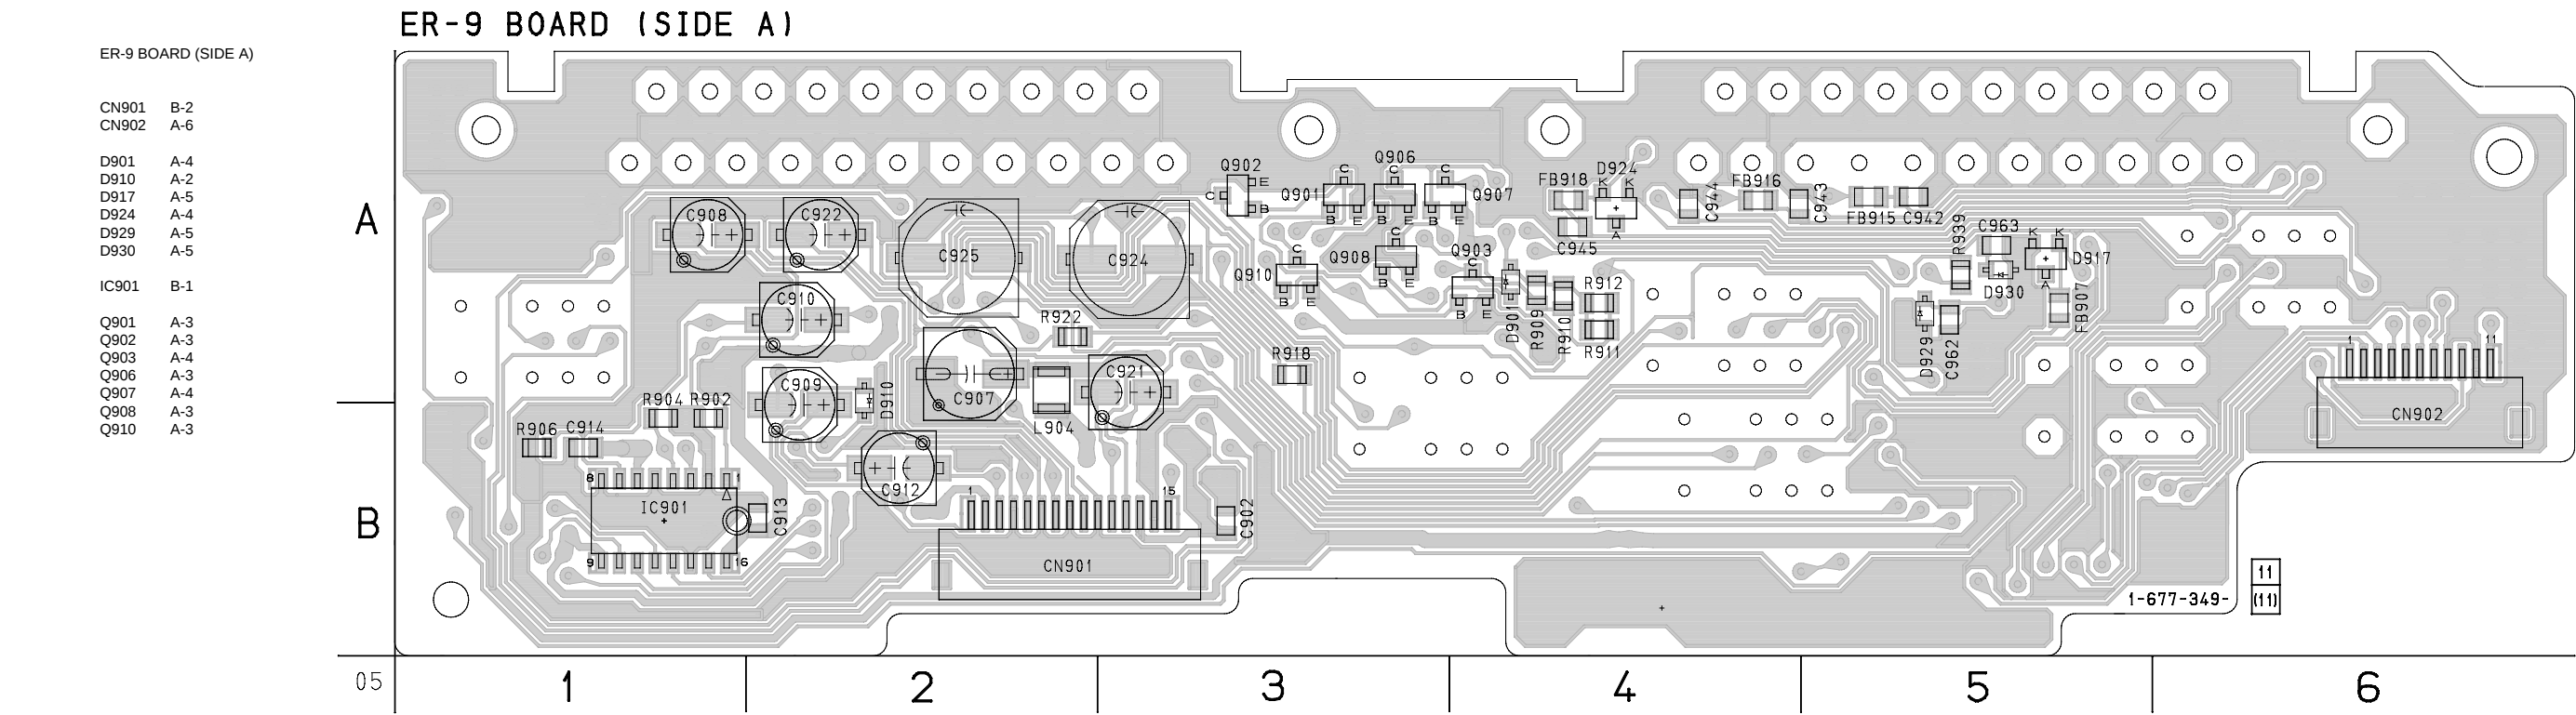

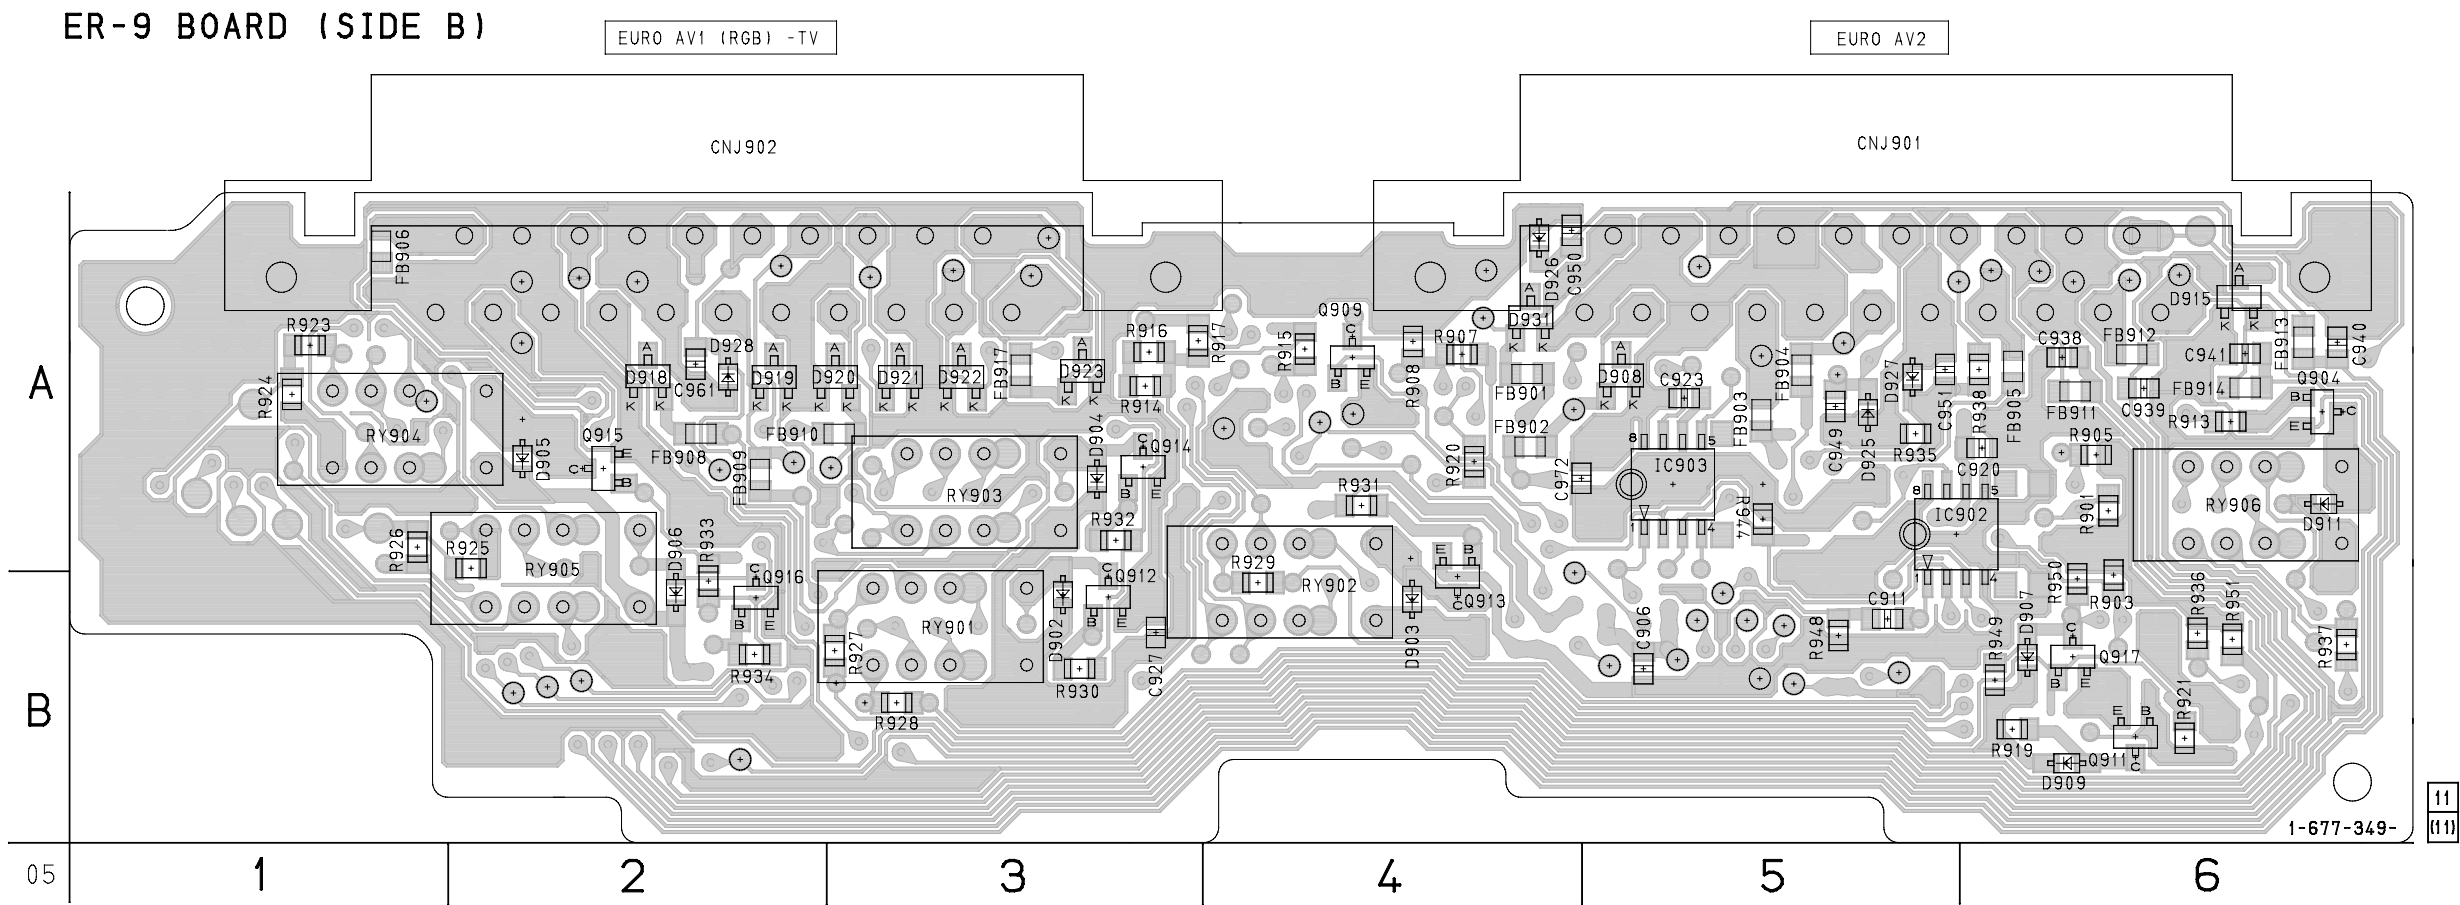


ER-9 BOARD (SIDE B)


- | | |
|-------|-----|
| D902 | B-3 |
| D903 | B-4 |
| D904 | A-3 |
| D905 | A-2 |
| D906 | A-2 |
| D907 | B-6 |
| D908 | A-5 |
| D909 | B-6 |
| D911 | A-6 |
| D915 | A-6 |
| D918 | A-2 |
| D919 | A-2 |
| D920 | A-3 |
| D921 | A-3 |
| D922 | A-3 |
| D923 | A-3 |
| D926 | A-4 |
| D927 | A-5 |
| D931 | A-4 |
| IC902 | A-5 |
| IC903 | A-5 |
| Q904 | A-6 |
| Q909 | A-4 |
| Q911 | B-6 |
| Q912 | B-3 |
| Q913 | B-4 |
| Q914 | A-3 |
| Q915 | A-2 |
| Q916 | B-2 |
| Q917 | B-6 |

ER-9 (EURO AV1) SCHEMATIC DIAGRAM • See page 4-47 for printed wiring board.

- Ref. No.: ER-9 board; 2,000 series –
- DVP-S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU –

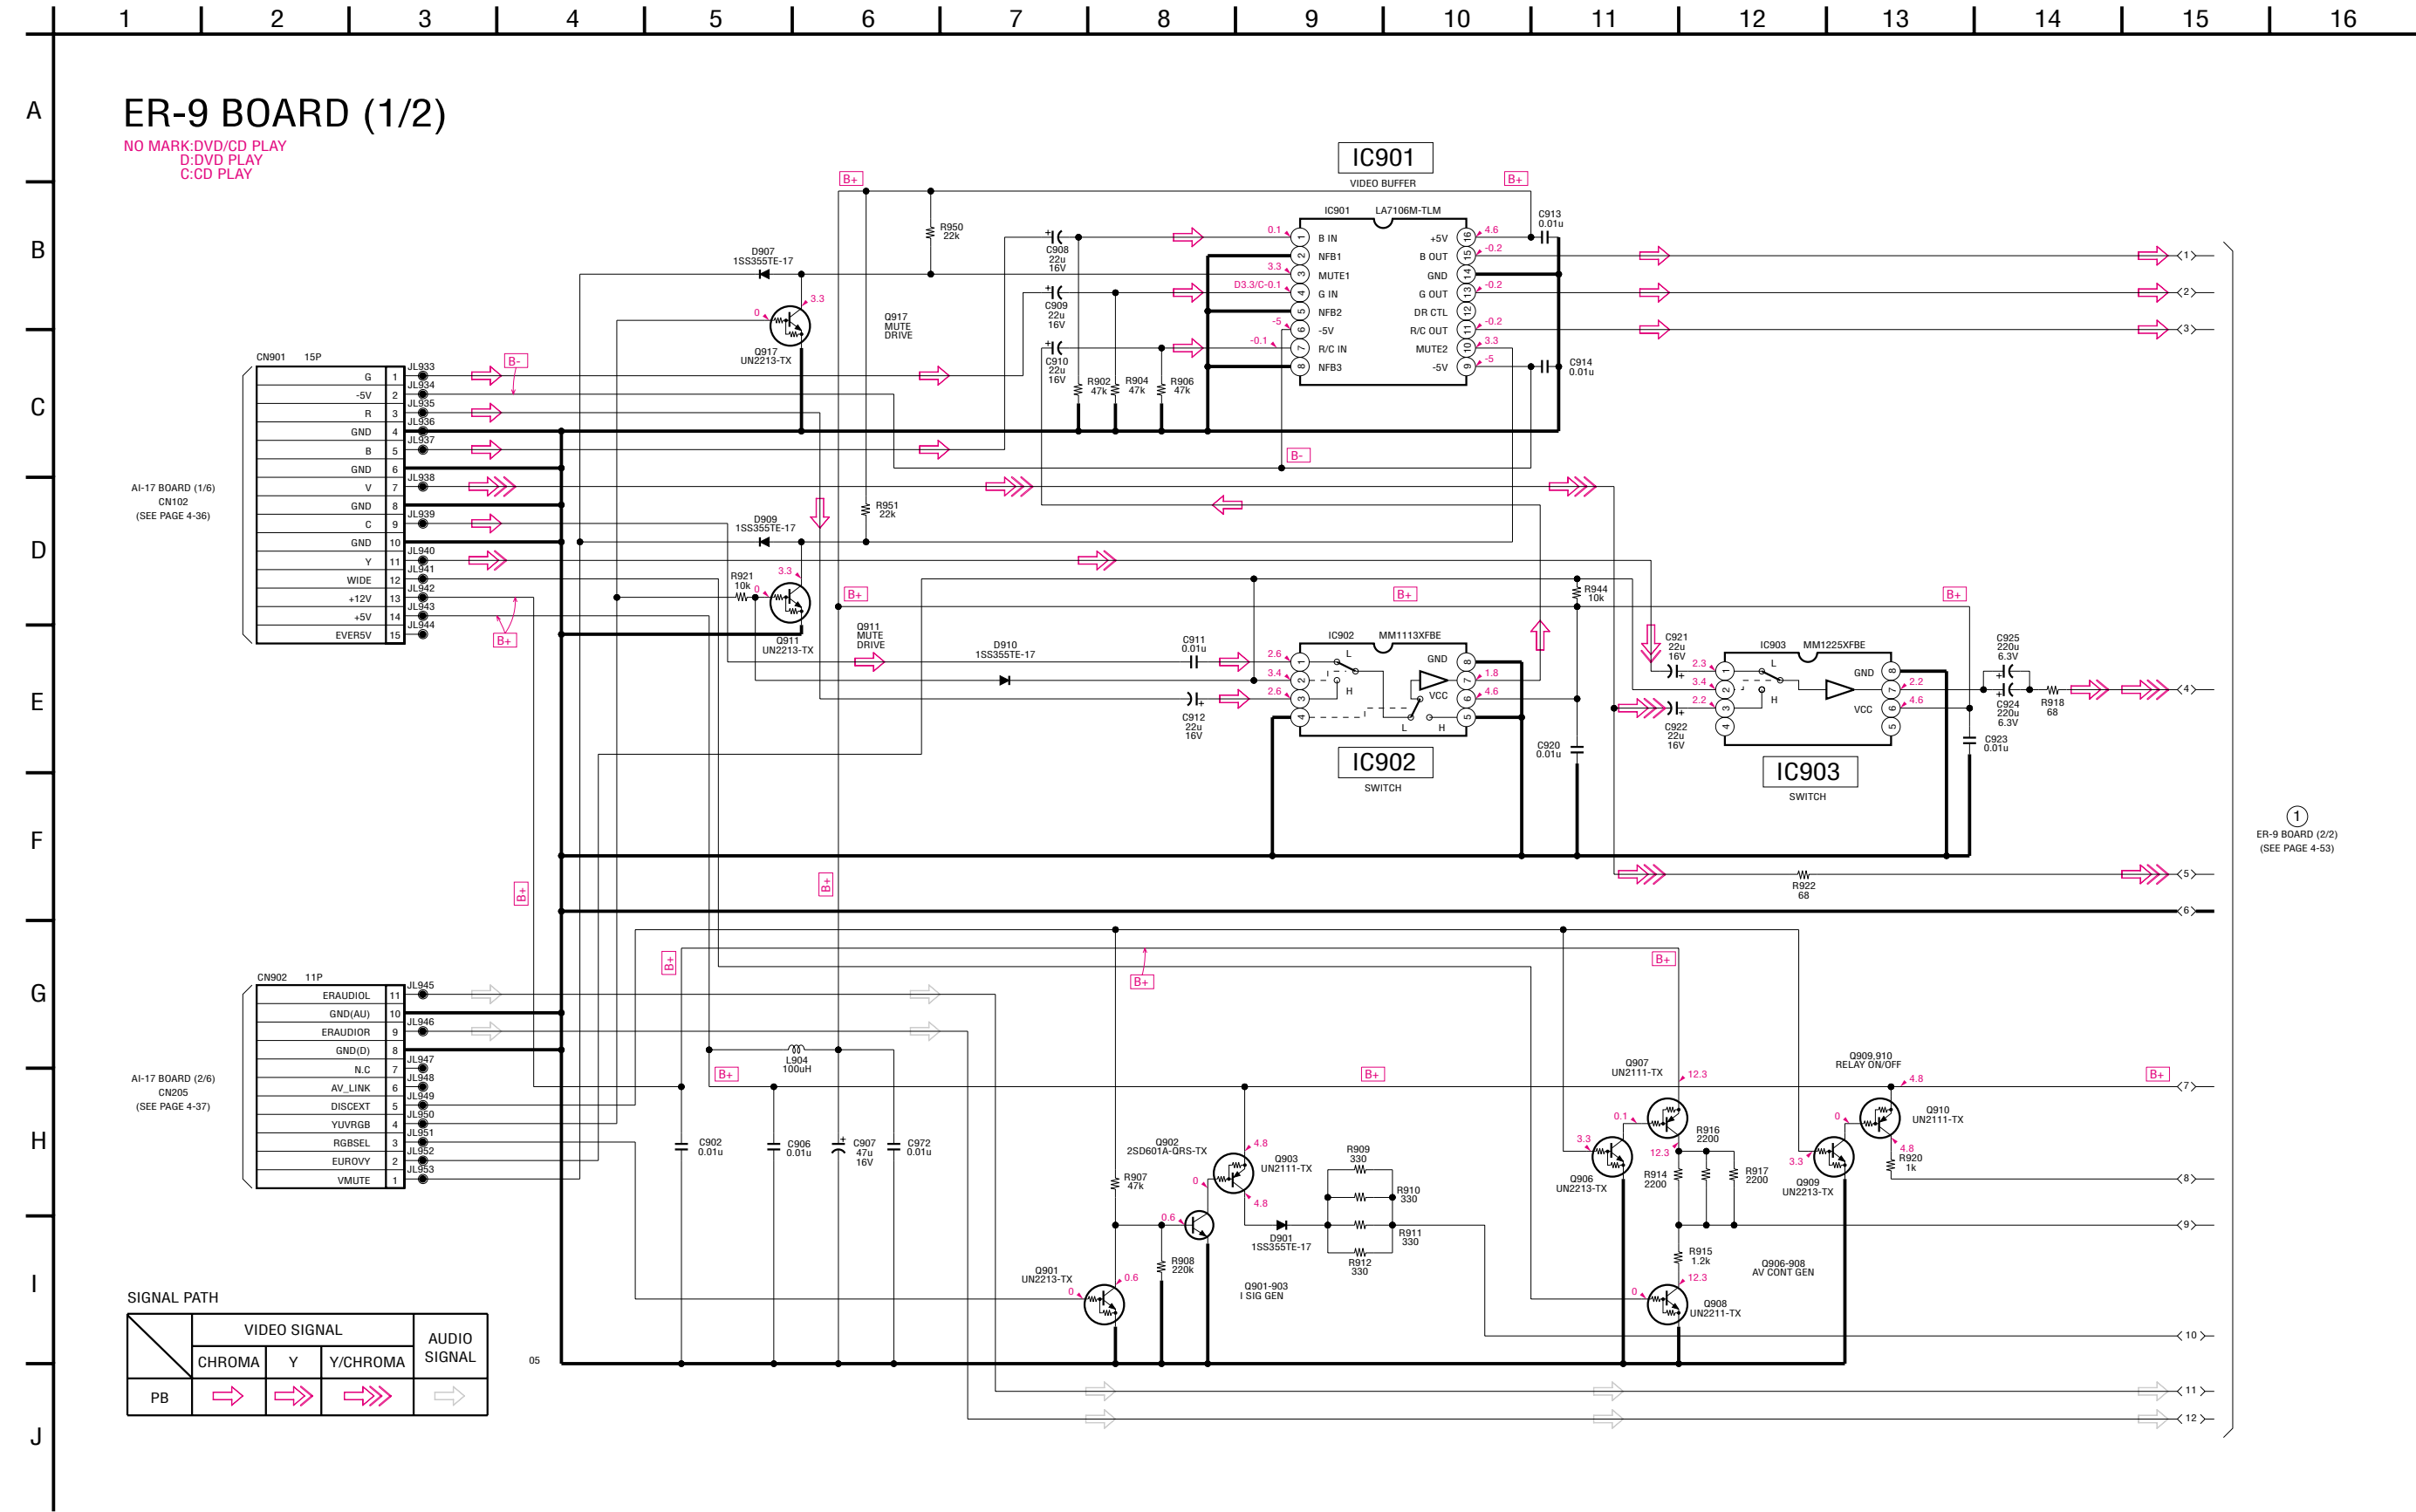



ER-9 (EURO AV2) SCHEMATIC DIAGRAM • See page 4-47 for printed wiring board.
– Ref. No.: ER-9 board; 2,000 series –
– DVP-S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU –

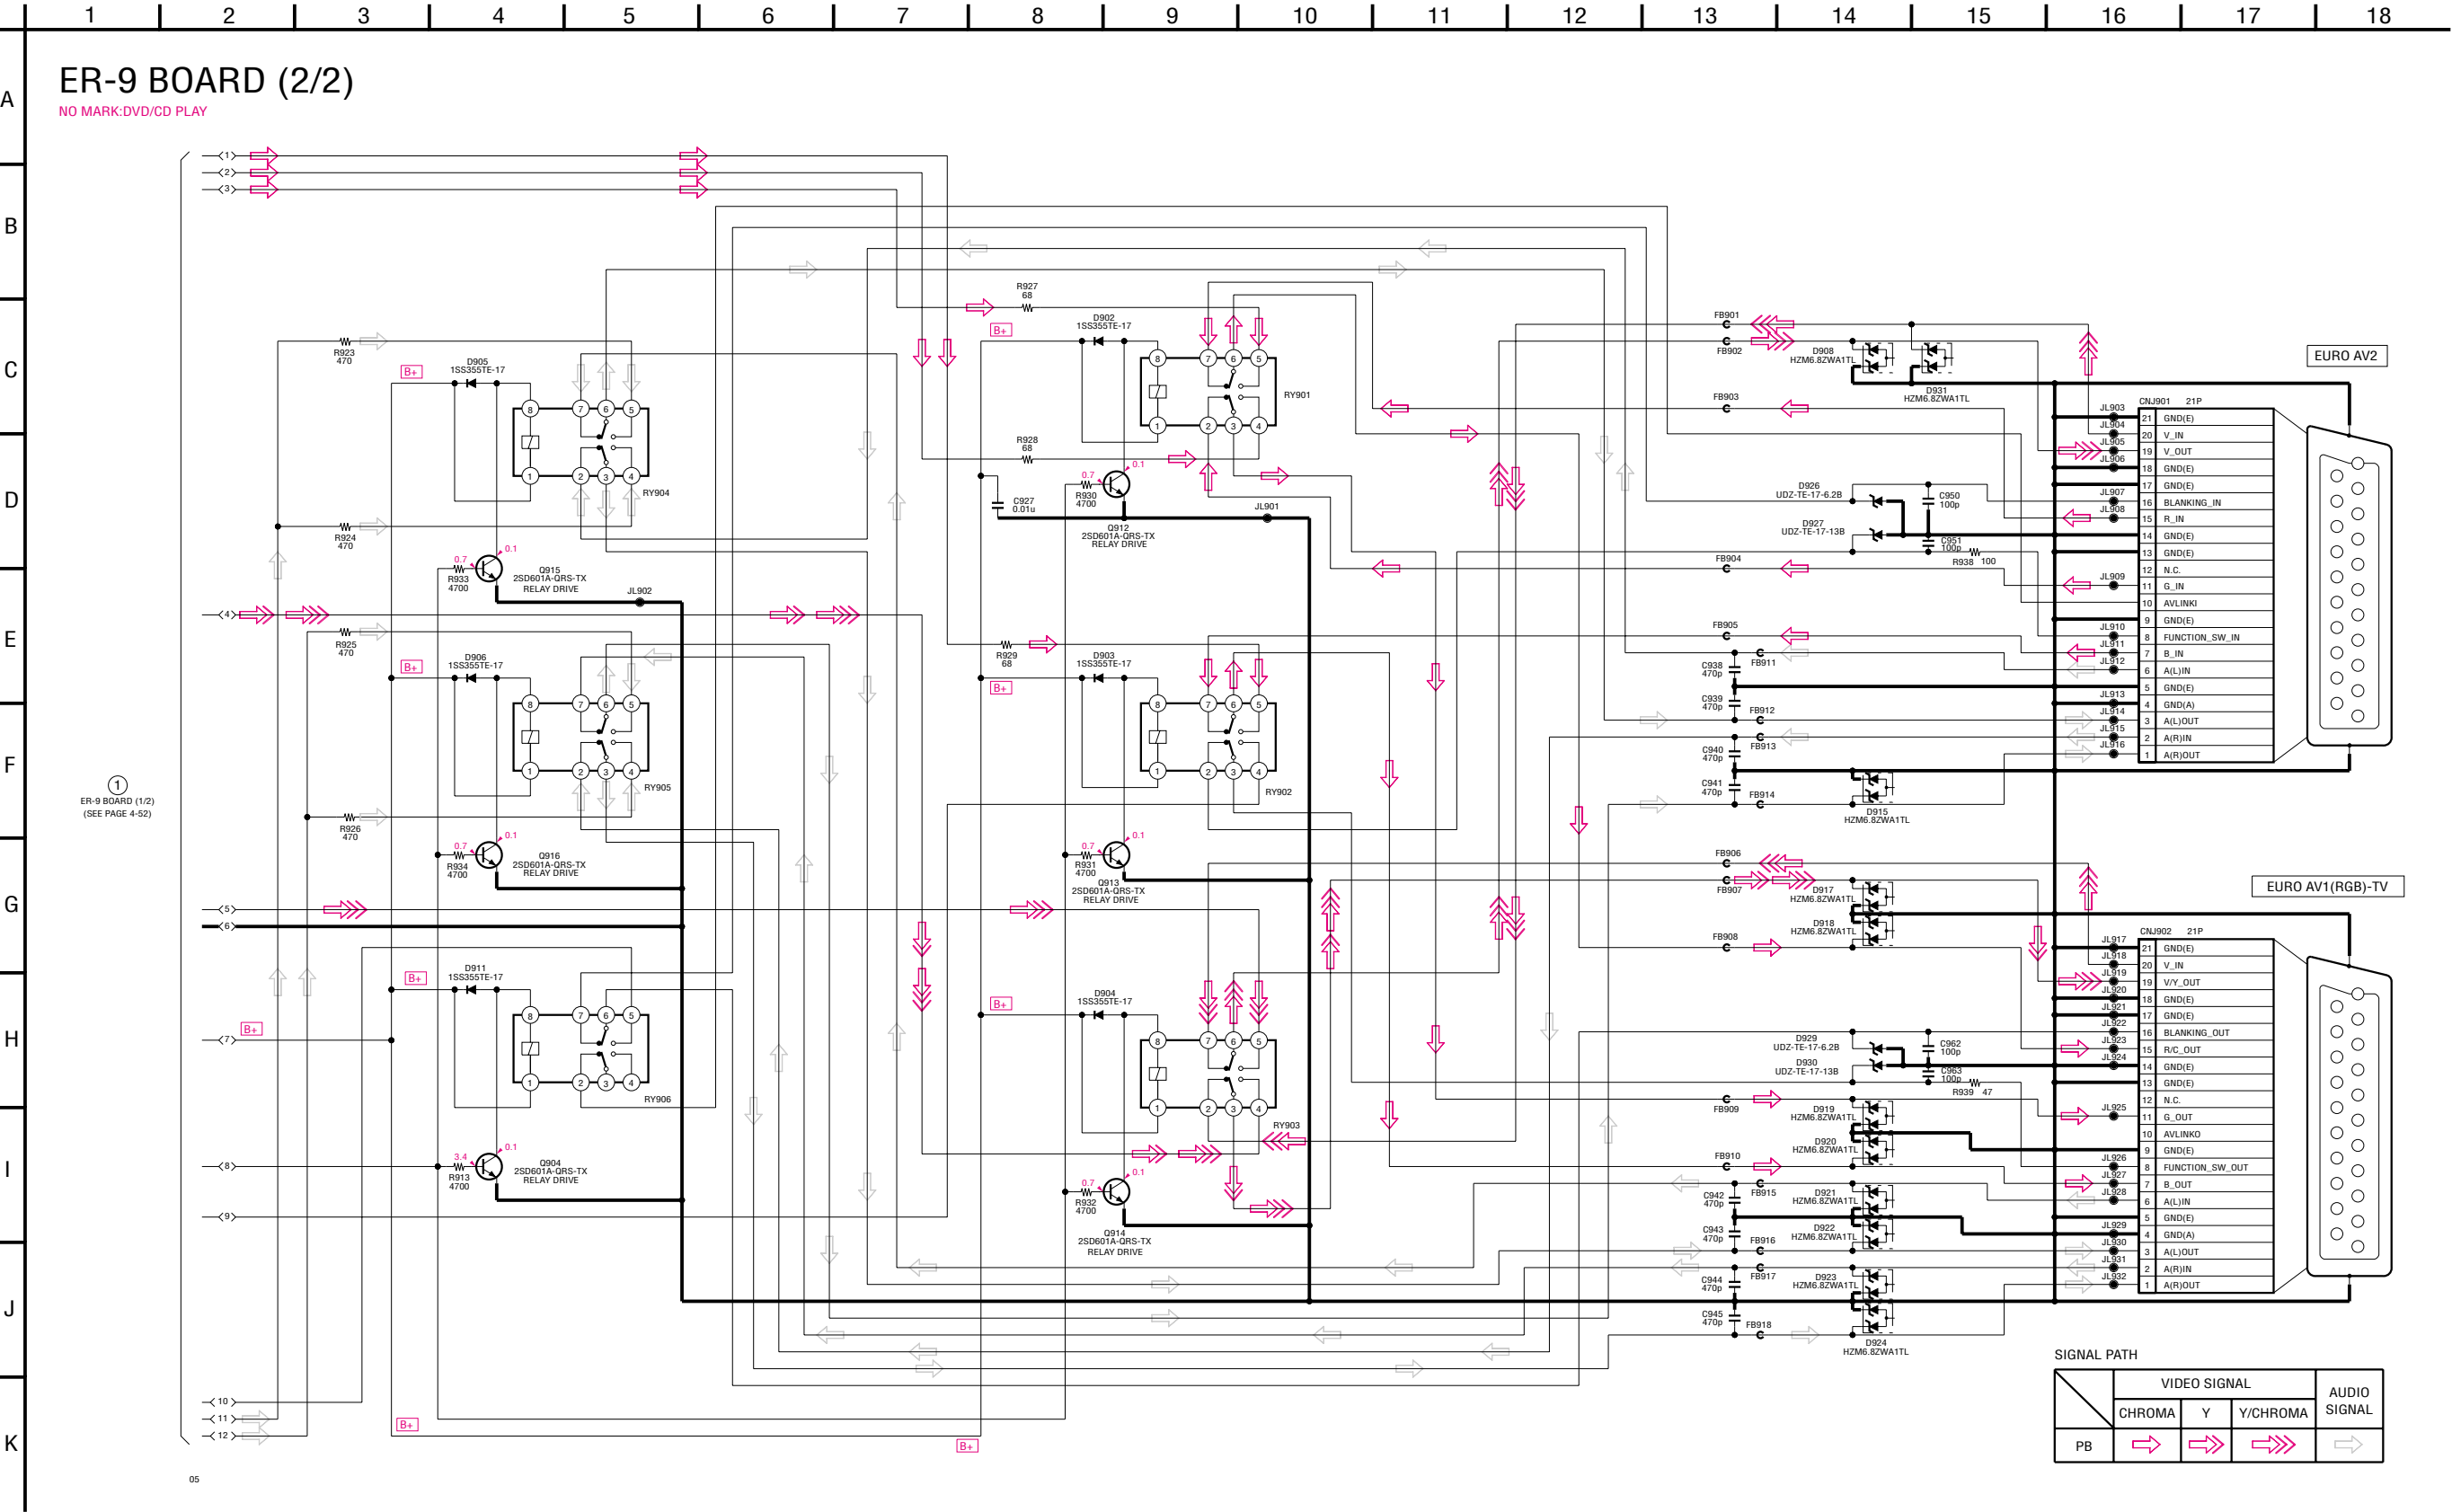

HP-127 (HEADPHONE) PRINTED WIRING BOARD

- Ref. No.: HP-127 board; 2,000 series -
- DVP-S535D/S735D -


There are few cases that the part isn't mounted in this model is printed on this diagram.

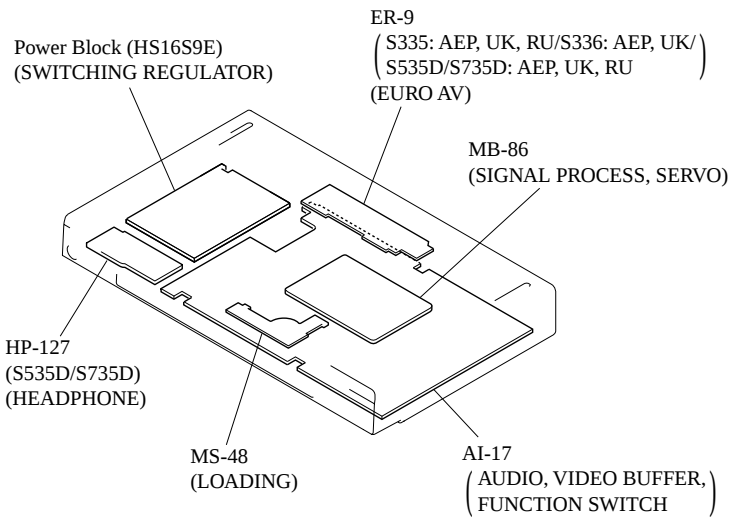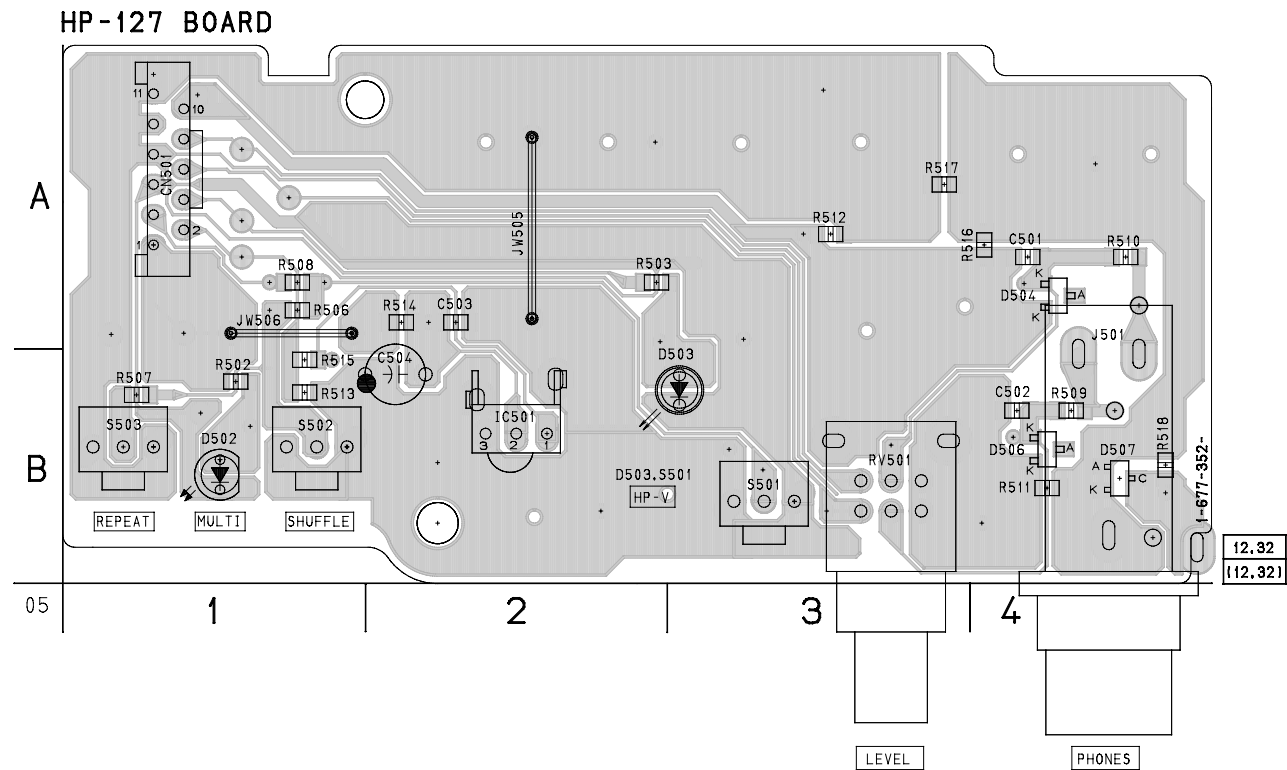

CN501	A-1
D502	B-1
D503	B-3
D504	A-4
D506	B-4
D507	B-4
IC501	B-2

HP-127 (HEADPHONE) SCHEMATIC DIAGRAM

– Ref. No.: HP-127 board; 2,000 series –
– DVP-S535D/S735D –

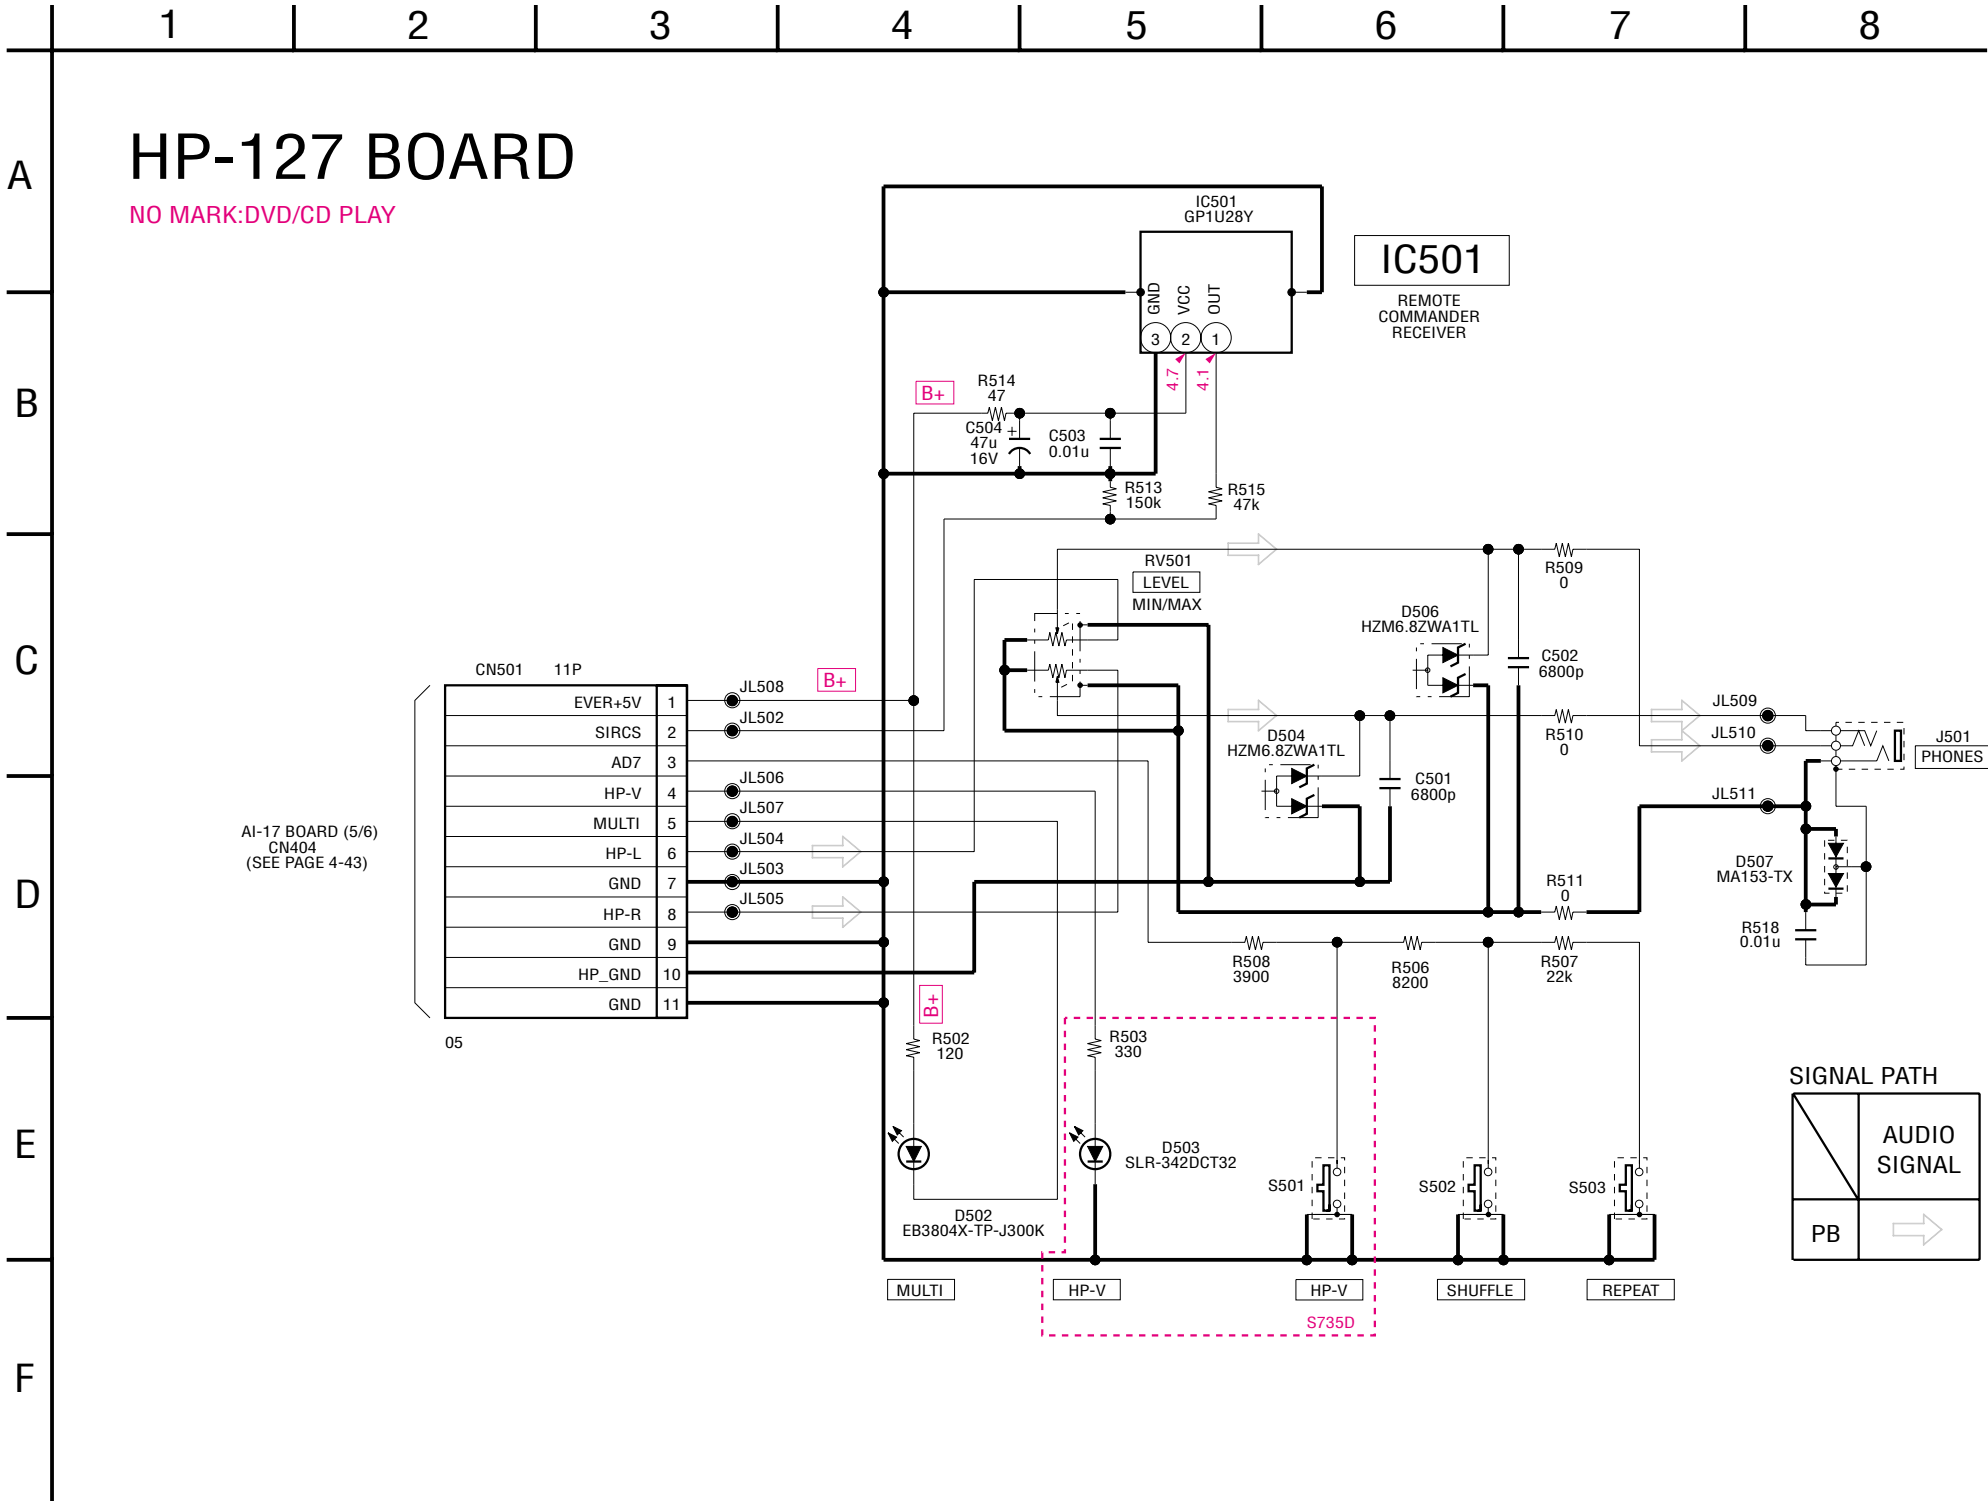

HS16S9E (SWITCHING REGULATOR) PRINTED WIRING BOARD

– Ref. No.:HS16S9E board; 3,000 series –

There are few cases that the part isn't mounted in this model is printed on this diagram.

HS16S9E BOARD


HS16S9E BOARD

CN101	C-4
CN201	A-1

D101	A-3
D102	A-3
D104	A-3
D105	A-3
D211	B-2
D212	B-1
D311	B-2
D315	C-2
D511	B-2
D611	B-2
D613	C-2
D615	C-1


IC301 A-2

Q101	B-3
Q102	A-3
Q211	A-1
Q312	C-2
Q511	A-1
Q611	B-1
Q615	C-1
Q621	C-1
Q711	A-2

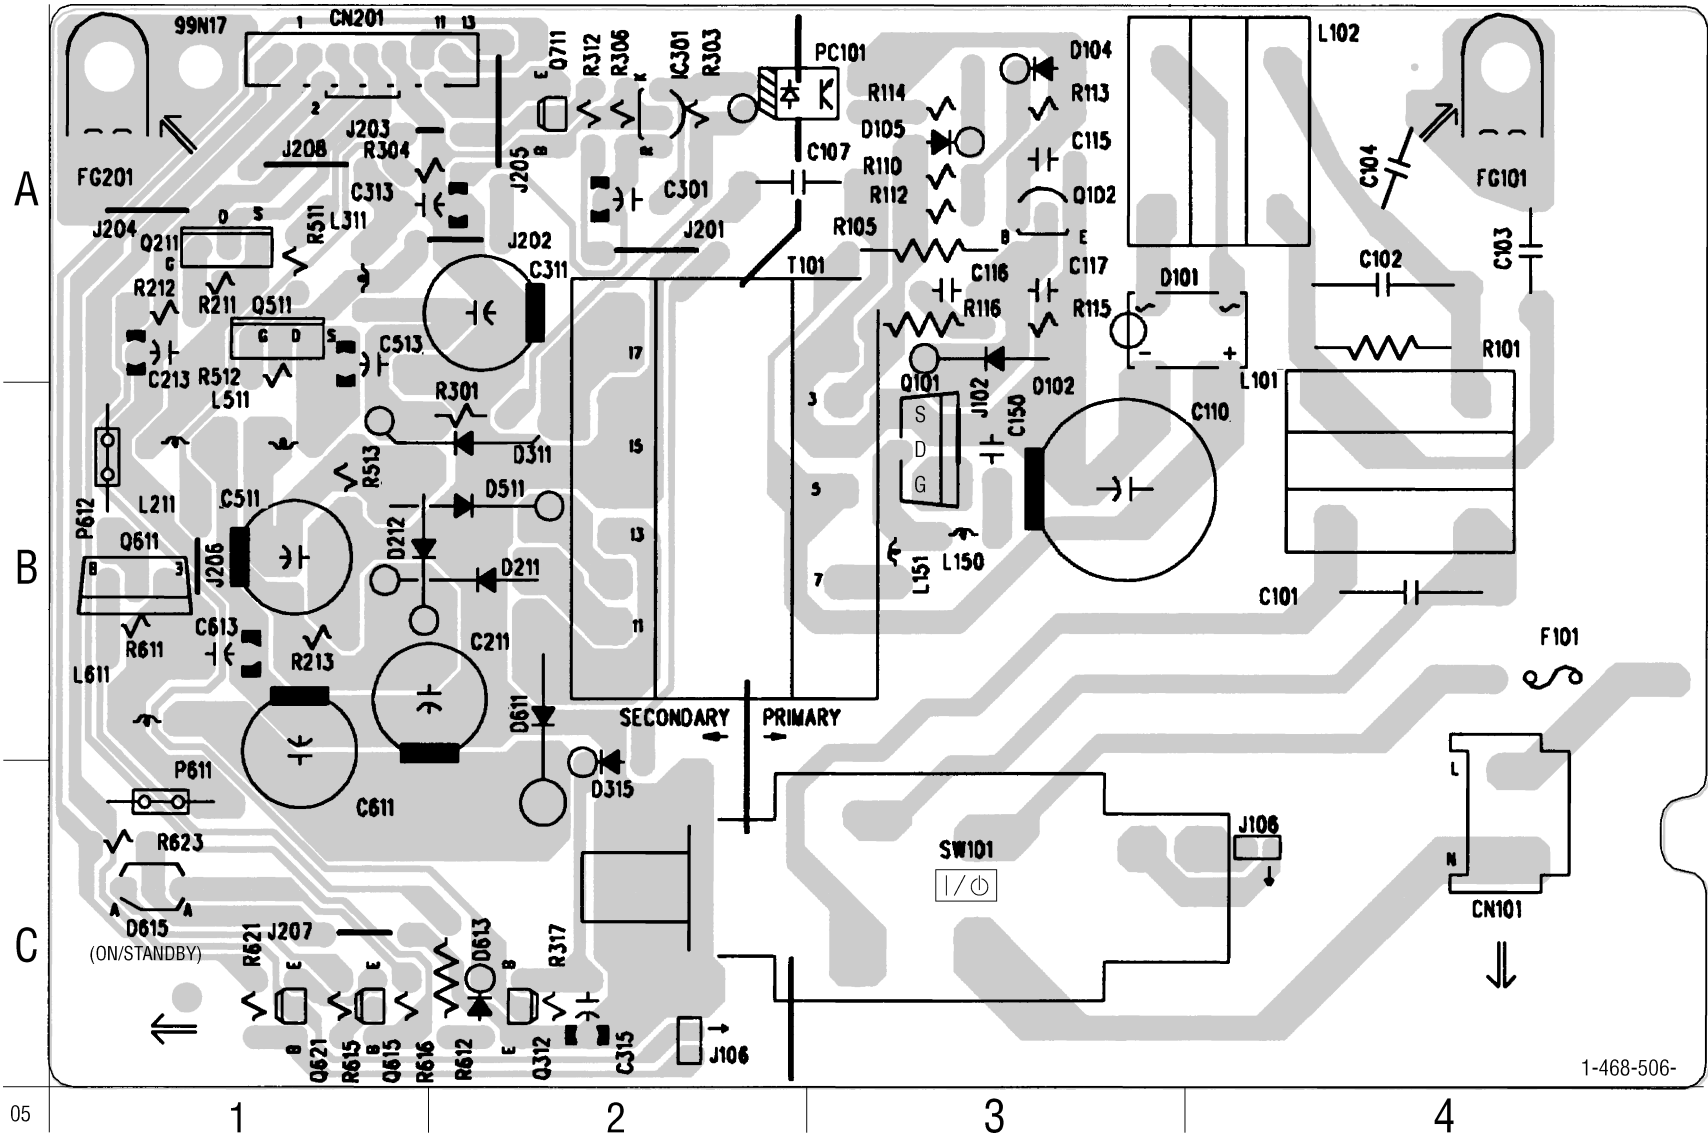


1-468-506-

31

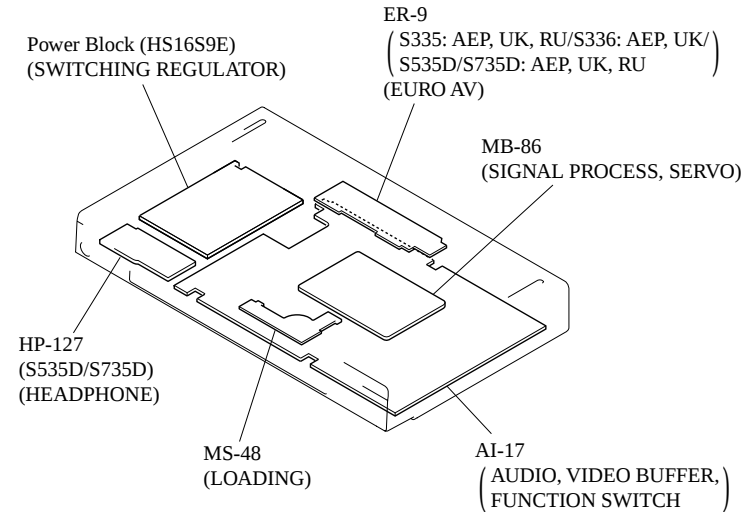

HS16S9E (SWITCHING REGULATOR) SCHEMATIC DIAGRAM
– Ref. No.: HS16S9E board; 3,000 series –

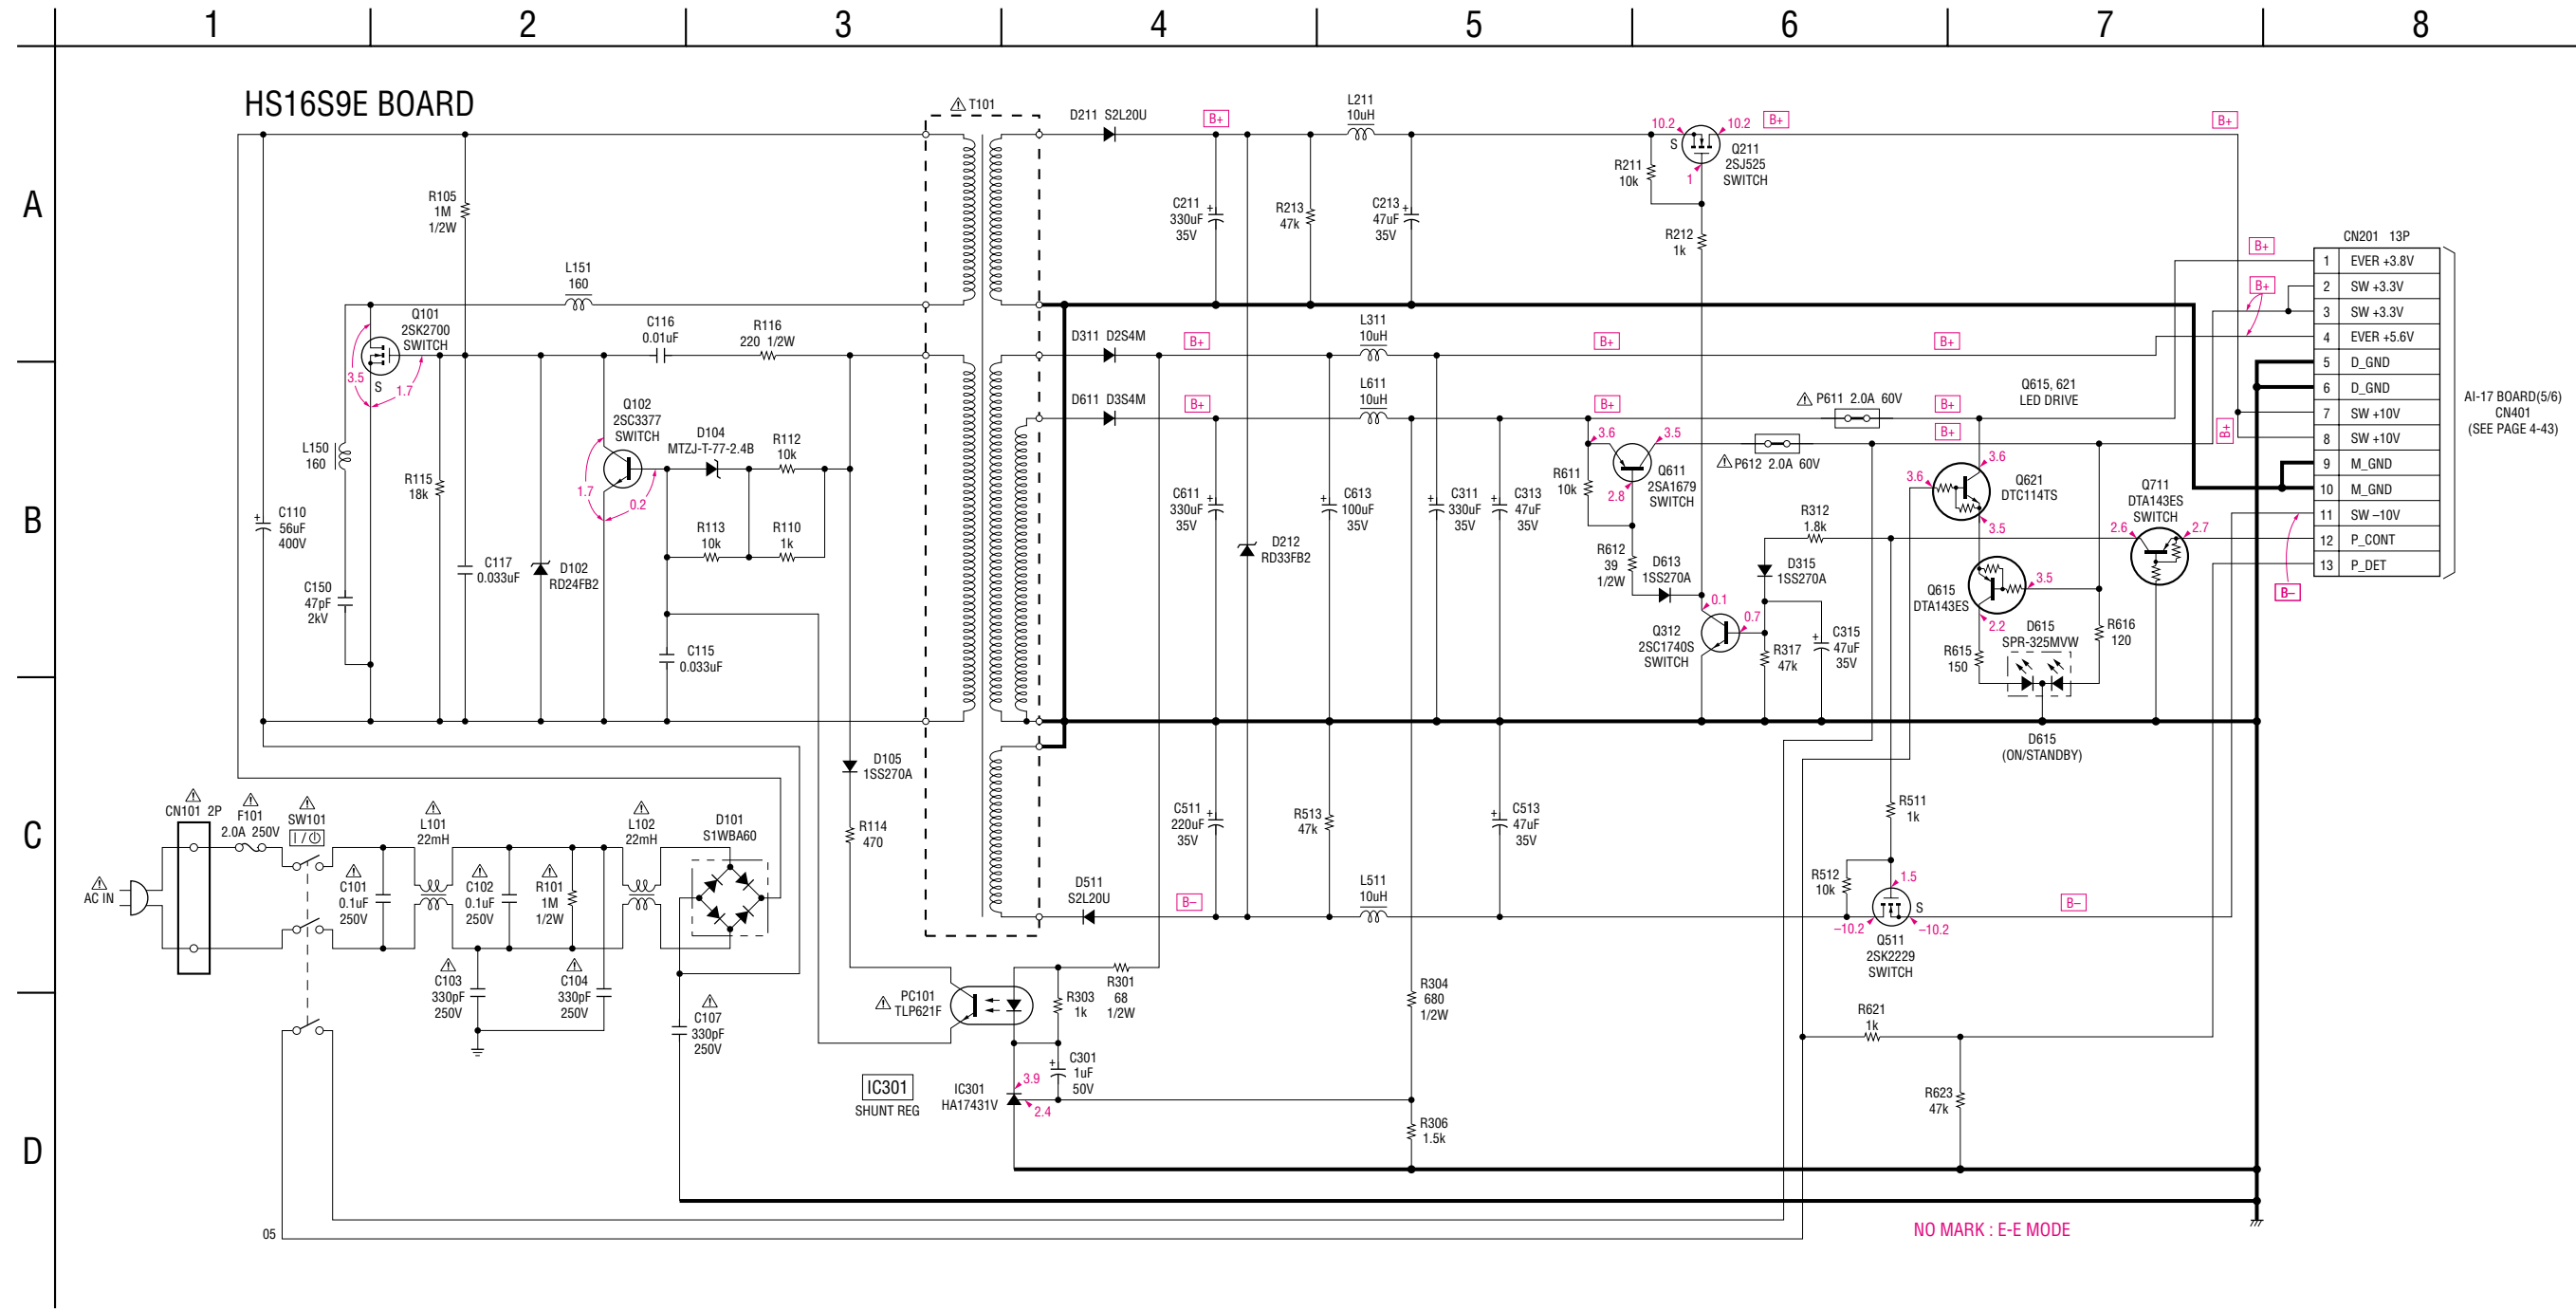

Note: The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

SECTION 5

IC PIN FUNCTION DESCRIPTION

Pin No.	Pin name	I/O	Function
39	SC1	O	Serial clock output
40	SI2	I	Serial bus 2 (for data input)
41	SO2	O	Serial bus 2 (for data output)
42	YUVRGB/CLAPSW1	O	Mute signal output to video buffer and EURO C/R select signal output
43	DREQ0	I	Input of DMA-REQ 0 from AV DEC
44	DACK0	O	Output of DMA-ACK 0 to AV DEC
45	IFCS	O	Chip select signal to IF CON
46	DREQ1	I	Input of DMA-REQ 1 from AV DEC
47	DACK1	O	Output of DMA-ACK 1 to AV DEC
48	EWC	O	Write control signal output to EEPROM
49	ECS	O	Chip select signal output to EEPROM
50	KCS/39CS	O	Chip select signal output to audio DSP
51	AURST	O	Reset signal output to audio DAC
52	VSS	-	Ground
53	X1	O	Clock output (12.5 MHz)
54	X0	I	Clock input (12.5 MHz)
55	VCC	-	Power supply
56	CKSW1	I	Chuck sensor input
57	OCSW1	I	Tray sensor input
58	OCSW2	I	Tray sensor input
59	DACS0	O	Chip select signal output to DAC (2ch)
60	DACS1	O	Chip select signal output to DAC (6ch) and DSP
61	48/44.1K	O	PLL FS control signal output
62	MAMUTE	O	Audio mute signal output
63	WIDE	O	WIDE select signal output
64	C	-	Capacitor (0.1uF) connect between ground
65	CS0X	O	External ROM chip select signal output
66	CS1X	-	Not used
67	CS2X	O	Chip select signal output (for AV DEC)
68	CS3X	O	Chip select signal output (for AV DEC)
69	CS4X	O	Chip select signal output (for ARP)
70	CS5X	O	Chip select signal output (for FGA)

5-1. SYSTEM CONTROL PIN FUNCTION (MB-86 BOARD IC102)

Pin No.	Pin name	I/O	Function
1-5	HA17-HA21	I/O	Address bus A17-A21
6	HA22	-	Not used
7	GAIN/RGBSEL	O	Color difference signal/RGB signal select signal output
8	DACMUTE/FS		Filter control signal output
9	AVCC	-	Power supply
10	AVRH	-	Reference power supply (+3.3 V)
11	AVSS	-	Ground
12	AN0	I	Set of mode 0
13	AN1	I	Set of mode 1
14	AN2	I	Set of mode 2
15	AN3	I	Set of mode 3
16	XRST	O	System reset signal output
17	OEB	-	Not used
18	CS6	O	Chip select signal for servo DSP
19	NC	-	Not used
20	EUROV/Y	O	EURO V/Y select signal output
21	CLAPSW0/DISCEXT	O	Line input select signal output (DISC: "H", EXT: "L")
22	ARPRST	O	Reset signal output for ARP
23	DRVMUTE	O	Drive mute signal output
24	VCC	-	Power supply
25	INT0	I	Input of interrupt from AV DEC
26	INT1	I	Input of interrupt from ARP
27	INT2	I	Input of interrupt from FGA
28	INT3	I	Input of interrupt from EEPROM
29	INT4	I	Input of interrupt from IF CON
30	CKSW2/OTASUKE/INT5	I	Input of interrupt from audio DSP
31	CLAPBSY/INT6	I	Input of interrupt from audio DSP
32	INT7	I	Input of interrupt from servo DSP
33	SI0	I	Serial data input from IF CON and EEPROM
34	VSS	-	Ground
35	SO0	O	Serial data output to IF CON and EEPROM
36	SC0	O	Serial clock output to IF CON and EEPROM
37	SI1	I	Serial bus 1 (for data input)
38	SO1	O	Serial bus 1 (for data output)

Pin No.	Pin name	I/O	Function
71	CPUCK	O	CPU clock signal output
72	NMIX	-	Not used (fixed at “H”)
73	HSTX	-	Not used (fixed at “H”)
74	FRRSTIN	I	Reset signal input from IF CON
75	VSS	-	Ground
76	MD0	I	Input of mode select 0 (fixed at “1”)
77	MD1	-	Ground
78	MD2	-	Ground
79	XWAIT	I	Wait signal input
80	BGRNTX	-	Test terminal (fixed at “H”)
81	BRQ	-	Test terminal (fixed at “H”)
82	RD	O	Read enable signal output
83	WRH	O	High byte write enable signal output (16 bit and 8 bit)
84	NC	-	Not used
85-92	HD0-HD7	I/O	Data bus D0-D7 (16 bit only)
93-100	HD8-HD15	I/O	Data bus D8-D15 (16 bit) , D0-D7 (8 bit)
101	VSS	-	Ground
102-109	HA0-HA7	O	Address bus A00-A07
110	VCC	-	Power supply
110-118	HA8-HA15	O	Address bus A08-A15

SECTION 6

TEST MODE

6-1. GENERAL DESCRIPTION

The Test Mode allows you to make diagnosis and adjustment easily using the remote commander and monitor TV. The instructions, diagnostic results, etc. are given on the on-screen display (OSD).

6-2. STARTING TEST MODE

Press **[TITLE]**, **[CLEAR]**, **[POWER]** buttons on the remote commander in this order with the power of main unit in OFF status, and the Test Mode starts, then the menu shown below will be displayed on the TV screen. At the bottom of menu screen, the model name and revision number are displayed.

To execute each function, select the desired menu and press its number on the remote commander.

To exit from the Test Mode, press the POWER button.

```

Test Mode Menu

0. Syscon Diagnosis
1. Drive Auto Adjustment
2. Drive Manual Operation
3. Mecha Aging
4. Emergency History
5. Version Information
6. Video Level Adjustment
                                Exit: Power Key
-
Model      : DPX13xxxx
Revision   : 1.xxxx

```

6-3. SYSCON DIAGNOSIS

The same contents as board detail check by serial interface can be checked from the remote commander.

On the Test Mode Menu screen, press **[0]** key on the remote commander, and the following check menu will be displayed.

```

### Syscon Diagnosis ###
Check Menu

0. Quit
1. All
2. Version
3. Peripheral
4. Servo
5. Supply
6. AV Decoder
7. Video
8. Audio
-

```

0. Quit

Quit the Syscon Diagnosis and return to the Test Mode Menu.

1. All

All items continuous check

This menu checks all diagnostic items continuously. Normally, all items are checked successively one after another automatically unless an error is found, but at a certain item that requires judgment through a visual check to the result, the following screen is displayed for the key entry.

```

### Syscon Diagnosis ###

Diag All Check
No. 2 Version

2-3. ROM Check Sum
Check Sum = xxxx

Press NEXT Key to Continue
Press PREV Key to Repeat
-

```

For the ROM Check, the check sum calculated by the Syscon is output, and therefore you must compare it with the specified value for confirmation.

Following the message, press **[NEXT]** key to go to the next item, or **[PREV]** key to repeat the same check again. To quit the diagnosis and return to the Check Menu screen, press **[STOP]** or **[ENTER]** key. If an error occurred, the diagnosis is suspended and the error code is displayed as shown below.

```

### Syscon Diagnosis ###

3-2. EEPROM Check
Error 03: EEPROM Write/Read N
Address   : 00000001
Write Data : 2492
Read Data  : 2490
Press NEXT Key to Continue
Press PREV Key to Repeat
-

```

Press **[STOP]** key to quit the diagnosis, or **[PREV]** key to repeat the same item where an error occurred, or **[NEXT]** key to continue the check from the item next to faulty item.

Submenu

Selecting 2 and subsequent items calls the submenu screen of each item.

For example, if “5. Supply” is selected, the following submenu will be displayed.

```

### Syscon Diagnosis ###
Check Menu
No. 5 Supply

0. Quit
1. All
2. ARP Register Check
3. ARP to RAM Data Bus
4. ARP to RAM Address Bus
5. ARP RAM Check
-

```

0. Quit

Quit the submenu and return to the main menu.

1. All

All submenu items continuous check

This menu checks 2 and subsequent items successively. At the item where visual check is required for judgment or an error occurred, the checking is suspended and the message is output for key entry.

Normally, all items are checked successively one after another automatically unless an error is found.
 Selecting 2 and subsequent items executes respective menus and outputs the results.
 For the contents of each submenu, see “Check Items List”.

General Description of Checking Method

2. Version

- (2-2) Revision
 - ROM revision number is displayed.
 - Error: Not detected.
 - The revision number defined in the source file of ROM (IC104) is displayed with four digits.
- (2-3) ROM Check Sum
 - Check sum is calculated.
 - Error: Not detected.
 - The data are added of ROM (IC104) and the result is displayed with 4-digit hexadecimal number. Error is not detected. Compare the result with the specified value.
- (2-4) Model Type
 - Model code is displayed.
 - Error: Not detected.
 - The model code is displayed with 2-digit hexadecimal number.

	Model Type	
DVP-S335 (AEP50, UK)	0	3
DVP-S335 (AEP51)	0	4
DVC-S335 (RU)	0	5
DVC-S335 (E, EA)	0	9
DVC-S336 (AEP06, UK)	0	3
DVC-S336 (AEP08)	0	4
DVC-S336 (AUS)	0	A
DVC-S345 (E)	0	9
DVP-S535D (AEP53, UK)	1	3
DVP-S535D (AEP52)	1	4
DVP-S735D (AEP51, UK)	2	3
DVP-S735D (AEP50)	2	4
DVP-S735D (RU)	2	5
DVP-S735D (E, EA)	2	9
DVP-S735D (AUS)	2	A

- Abbreviation
 - AUS : Australian
 - EA : Saudi Arabia
 - RU : Russian
- Description about destination (AEP model)
 - AEP50
 - ↑ This number indicates the suffix number of its “model code”.
- (2-5) Region
 - Region code is displayed.
 - Error: Not detected.
 - The region code determined from the model code is displayed.

3. Peripheral

- (3-2) EEPROM Check
 - Data write → read, and accord check
 - Error 03: EEPROM write/read discord
 - Before writing, the data are saved, then after checking, they are written to restore the contents of EEPROM.
- (3-3) Gate Array Check
 - Data write → read, and accord check
 - Error 02: Gate array write/read discord
- (3-4) NAND Flash Check
 - Data clear → write → read, and accord check
 - This check is conducted to the DVP-S735D only.
 - Error 04: Clear error
 - 05: Write error
 - 06: Read data discord
 - 21: Faulty blocks exceed 10
 - The data clear, write, read, and check are executed to the block 0 of Flash memory (IC802).
 - In case of a faulty block, its address is displayed.

4. Servo

- (4-2) Servo DSP Check
 - Data write → read, and accord check
 - Error 12: Read data discord
- (4-3) DSP Driver Test
 - Test signal data → DSP Driver
 - Error: Not detected.

5. Supply

Caution: Do not conduct this check with a mechanical deck connected.
 An access is made to the stream supply and servo control IC (IC302) and external RAM (IC303) using check data. If mechanical deck is connected, the motor and optics could be damaged. This check is also executed by the “All” menu item.

Supplement: How to disconnect mechanical deck
 Disconnect flexible flat cables connected to the CN201 and CN202 of MB-86 board. Also, disconnect flat cable from the CN401.

- (5-2) ARP Register Check
 - Data write → read, and accord check
 - Error 08: ARP register write, and read data discord
- (5-3) ARP to RAM Data Bus
 - Data write → read, and accord check
 - Error 09: ARP ↔ RAM data bus error
 - Data 0x0001 to 0x8000 where one bit each is set to 1 are written to the address 0 of RAM (IC303) connected to the ARP (IC302) through the bus, then they are read and checked. In case of discord, written bit pattern and read data are displayed. If data where multiple bits are 1 are read, the bits concerned may touch each other. Further, if data where certain bit is always 1 or 0 regardless of written data, the line could be disconnected or shorted.
- (5-4) ARP to RAM Address Bus
 - Data write → other address read discord check
 - Error 10: ARP → RAM address bus error
 - Caution: Address and data display in case of an error is different from the display of other diagnosis (described later).

Before starting the test, all addresses of RAM (IC303) are cleared to 0x0000.

First, 0xA55A is written to the address 0x00000, and the address data are read and checked from addresses 0x00001 to 0x80000 while shifting 1 bit each. Next, the data at that address is cleared, and it is written to the address 0x00001, and read and checked in the same manner. This check is repeated up to the address 0x80000 while shifting the address data by 1 bit each.

If data other than 0 is read at the addresses except written address, an error is given because all addresses were already cleared to 0. In this check, the error display pattern is different from that of other diagnosis; read data, written address, and read address are displayed in this order. However, the message uses same template, and accordingly exchange Address and Data when reading. The following display, for example,

Syscon Diagnosis

```
5-4. ARP to RAM Address Bus
Error 10: ARP - RAM Address B
Address   : 0000A55A
Write Data: 00000000
Read Data : 00080000
Press NEXT Key to Continue
Press PREV Key to Repeat
—
```

shows the data 0xA55A was read from address 0x00080000 though it was written to the address 0x00000000. This implies that these addresses are in the form of shadow. Also, if the read data is not 0xA55A, another error will be present.

(5-5) ARP RAM Check

Data write → read, and accord check

Error 11: ARP RAM read data discord

The program code data stored in ROM are copied to all areas of RAM (IC303) connected to the ARP (IC302) through the bus, then they are read and checked if they accord. If the detail check was selected initially, the data are written to all areas and read, then the same test is conducted once again with the data where all bits are inverted between 1 and 0. If discord is detected, faulty address, written data, and read data are displayed following the error code 11, and the test is suspended.

6. AV Decoder

(6-2) 1930 RAM

Data write → read, and accord check

Error 13: AVD RAM read data discord

The program code data stored in ROM (IC104) are copied to all areas of RAM (IC504, IC505) connected to the AVD (IC502) through the bus, then they are read and checked if they accord. Further, the same test is conducted once again with the data where all bits are inverted between 1 and 0. If discord is detected, faulty address, written data, and read data are displayed following the error code 13, and the test is suspended.

(6-3) 1930 SP

ROM → AVD RAM → Video OUT

Error: Not detected.

The data including sub picture streams in ROM (IC104) are transferred to the RAM (IC504, IC505) in AVD (IC502), and output as video signals from the AVD (IC502).

They are output from all video terminals (Composite, Y/C, Component) except EURO AV terminal.

7. Video

(7-2) Color Bar

AVD color bar command write → Video OUT

Error: Not detected.

The command is transferred to the AVD, and the color bar signals are output from video terminals.

They are output from all video terminals (Composite, Y/C, Component) except EURO AV terminal.

(7-3) Composite Out

EURO-AV Composite video output check

AVD color bar command write → Video (EURO-AV Composite) OUT

Error: Not detected.

With the Component of video output turned off, the color bar signals are output from the EURO-AV terminal.

(7-4) Y/C Out

EURO-AV Y/C video output check

AVD color bar command write → Video (EURO-AV Y/C) OUT

Error: Not detected.

With the Y/C of video output turned on, the color bar signals are output from the EURO-AV terminal.

(7-5) RGB Out

EURO-AV RGB video output check

AVD color bar command write → Video (EURO-AV RGB) OUT

Error: Not detected.

With the RGB of video output turned on, the color bar signals are output from the EURO-AV terminal.

(7-6) Component Out

EURO-AV Component video output check

AVD color bar command write → Video (EURO-AV Component) OUT

Error: Not detected.

With the Component of video output turned on, the color bar signals are output from the EURO-AV terminal.

(7-7) Euro AV Through

Euro-AV2 input check.

Check video and audio signal pass through from Euro-AV2 to Euro-AV1.

Error: Not detected.

8. Audio

(8-2) ARP → 1930

Error 14 : ARP → 1930 video NG

15 : ARP → 1930 audio NG

(8-3) Test Tone

A pink noise signal is output from the AVD (IC502) through optical coaxial digital terminal and analog audio terminal.

Error: Not detected.

All channels → 2ch Left → 2ch Right → Front Left → Front Right → Rear Left → Rear Right → Center → Sub Woofer are checked in this order.

Caution: Sub Woofer is checked only for low-frequency components, and no sound will be heard unless a proper super woofer is connected.

Check Items List

2) Version

(2-2) Revision

(2-3) ROM Check Sum

(2-4) Model Type

(2-5) Region

3) Peripheral

(3-2) EEPROM Check

(3-3) Gate Array Check

(3-4) NAND Flash Check (DVP-S735D)

4) Servo

(4-2) Servo DSP Check

(4-3) DSP Driver Test

5) Supply

(5-2) ARP Register Check

(5-3) ARP to RAM Data Bus

(5-4) ARP to RAM Address Bus

(5-5) ARP RAM Check

6) AV Decoder

(6-2) 1930 RAM

(6-3) 1930 SP

7) Video

(7-2) Color Bar

(7-3) Composite Out

(7-4) Y/C Out

(7-5) RGB Out

(7-6) Component Out

(7-7) Euro AV Through

8) Audio

(8-2) ARP → 1930

(8-3) Test Tone

Error Codes List

00: Error not detected

01: RAM write/read data discord

02: Gate array NG

03: EEPROM NG

04: Flash memory clear error

05: Flash memory write error

06: Flash memory read data discord

08: ARP register read data discord

09: ARP ↔ RAM data bus error

10: ARP ↔ RAM address bus error

11: ARP RAM read data discord

12: Servo DSP NG

13: 1930 SDRAM NG

14: ARP → 1930 video NG

15: ARP → 1930 audio NG

16: 1939 UCODE download NG

17: System call error (function not supported)

18: System call error (parameter error)

19: System call error (illegal ID number)

20: System call error (time out)

21: NAND Flash faulty blocks exceed 10

90: Error occurred

91: User verification NG

92: Diagnosis cancelled

6-4. DRIVE AUTO ADJUSTMENT

On the Test Mode Menu screen, press **[1]** key on the remote commander, and the drive auto adjustment menu will be displayed.

```
## Drive Auto Adjustment ##

      Adjustment Menu

0. ALL
1. DVD-SL
2. CD
3. DVD-DL
4. SACD

Exit: RETURN
```

Normally, **[0]** is selected to adjust DVD (single layer), CD, DVD (dual layer), and SACD in this order. But, individual items can be adjusted for the case where adjustment is suspended due to an error. In this mode, the adjustment can be made easily through the operation following the message displayed on the screen.

The disc used for adjustment must be the one specified for adjustment. However, for SACD disc, use the player with initial data if the disc is not available.

0. ALL

You will be asked if EEPROM data are initialized or not, and for this prompt, select **[0]** and press the **[ENTER]** key, and the servo set data in EEPROM will be initialized. Then, 1. DVD-SL disc, 2. CD disc, 3. DVD-DL disc, and 4. SACD disc are adjusted in this order. Each time one disc was adjusted, it is ejected. Replace it with the specified disc following the message. Though the message to confirm whether discs other than SACD disc are adjusted is not displayed, you can finish the adjustment if pressing the **[STOP]** button. The S curve level, RF level, and jitter value can be confirmed during adjustment, and if OK, press the **[ENTER]** key and continue adjustment. (If NG, press the **[STOP]** button) During adjustment of each disc, the measurement for disc type judgment is made. As automatic adjustment does not judge the disc type unlike conventional models, take care not to insert wrong type discs. Also, do not give a shock during adjustment.

1. DVD-SL (single layer)

Select **[1]**, insert DVD single layer disc, and press **[ENTER]** key, and the adjustment will be made through the following steps, then adjusted values will be written to the EEPROM.

DVD Single Layer Disc Adjustment Steps

1. SLED TILT Reset
2. Disc Check Memory SL
3. Wait 500 msec
4. Set Disc Type SL
5. LD ON
6. Spdl Start
7. Wait 1 sec
8. Focus Search ON
9. Focus Search OFF
10. Focus Servo ON 1
11. Auto Track Offset Adjust
12. Tracking ON
13. CLVA ON
14. Wait 1 sec
15. Sled ON
16. Check CLV Lock
17. Auto LFO Adjust
18. Auto Focus Offset Adjust
19. Auto Tilt Position Adjust
20. Auto Focus Gain Adjust
21. Auto Focus Offset Adjust
22. EQ Boost Adjust
23. Auto LFO Adjust
24. Auto Track Gain Adjust
25. All Servo Stop
26. Eep Copy Loop Filter Offset

2. CD

Select [2], insert CD disc, and press [ENTER] key, and the adjustment will be made through the following steps, then adjusted values will be written to the EEPROM.

CD Adjustment Steps

1. Sled Tilt Rest
2. Disc Check Memory CD
3. Wait 500 msec
4. Set Disc Type CD
5. LD ON
6. Spdl Start
7. Wait 1 sec
8. Focus Search ON
9. Focus Search OFF
10. Focus Servo ON 1
11. Auto Track Offset Adjust
12. Tracking ON
13. (TC Display Start)
14. CLVA ON
15. Wait 1 sec
16. Jitter Display Start
17. Sled ON
18. Check CLV ON
19. Auto LFO Adjust
20. Auto Focus Offset Adjust
21. Auto Focus Gain Adjust
22. Auto Focus Offset Adjust
23. Eq Boost Adjust
24. Auto LFO Adjust
25. Auto Track Gain Adjust
26. All Servo Stop

3. DVD-DL (dual layer)

Select [3], insert DVD dual layer disc, and press [ENTER] key, and the adjustment will be made through the following steps, then adjusted values will be written to the EEPROM.

DVD Dual Layer Disc Adjustment Steps

1. Sled Tilt Reset
2. Disc Check Memory DL
3. Wait 500 msec
4. Set Disc Type DL
5. LD ON
6. Spdl Start
7. Wait 1 sec
Layer 1 Adjust
8. Focus Servo ON 1
9. Auto Track Offset Adjust
10. Tracking ON
11. Clva ON
12. Wait 1 sec
13. Sled ON
14. Check CLV Lock
15. Auto Loop Filter Offset Adjust
16. Auto Focus Offset Adjust
17. Auto Focus Gain Adjust
18. Auto Focus Offset Adjust
19. Eq Boost Adjust
20. Auto Loop Filter Offset
21. Auto Track Gain Adjust
Layer 0 Adjust
22. Fj (L1 → L0)
23. Auto Track Offset Adjust L0
24. Tracking ON
25. Clva ON
26. Wait 1 sec
27. Sled ON
28. Check CLV Lock
29. Auto Loop Filter Offset Adjust
30. Auto Focus Offset Adjust
31. Auto Focus Gain Adjust
32. Auto Focus Offset Adjust
33. Eq Boost Adjust
34. Auto Loop Filter Offset
35. Auto Track Gain Adjust
36. All Servo Stop

4. SACD

Select [4], insert SACD disc, and press [ENTER] key, and the adjustment will be made through the following steps, then adjusted values will be written to the EEPROM. However, if SACD disc is not available, use the player with initial data, skipping the SACD adjustment. In this case, you can finish the adjustment if pressing the [STOP] button.

SACD Adjustment Steps

1. Sled Tilt Reset
2. Set Disc Type CD
3. LD ON
4. Spdl Start
5. Wait 1 sec
6. Focus Servo ON 0
7. Auto track Offset Adjust
8. Tracking ON
9. CLVA ON
10. Wait 1 sec
11. Sled ON
12. Check CLV ON
13. Auto LFO Adjust
14. Auto Focus Offset Adjust
15. Auto Focus Gain Adjust
16. Auto Focus Offset Adjust
17. Eq Boost Adjust
18. Auto LFO Adjust
19. Auto Track Gain Adjust
20. All Servo Stop

6-5. DRIVE MANUAL OPERATION

On the Test Mode Menu screen, select [2], and the manual operation menu will be displayed. For the manual operation, each servo on/off control and adjustment can be executed manually.

```
## Drive Manual Operation ##

          Operation Menu
1. Disc type
2. Servo Control
3. Track/Layer Jump
4. Manual Adjustment
5. Auto Adjustment
6. Memory Check

0. Disc Check Memory

          Exit: Return
```


In using the manual operation menu, take care of the following points. These commands do not provide protection, thus requiring correct operation. The sector address or time code field is displayed when a disc is loaded.

1. Set correctly the disc type to be used on the Disc Type screen.
The disc type must be set after a disc was loaded.
The set disc type is cleared when the tray is opened.
2. After power ON, if the Drive Manual Operation was selected, first perform "Reset SLED TILT" by opening 1. Disc Type screen.
3. In case of an alarm, immediately press the [STOP] button to stop the servo operation, and turn the power OFF.

Basic operation (controllable from front panel or remote commander)

[POWER]	Power OFF
[STOP]	Servo stop
[OPEN/CLOSE]	Stop+Eject/Loading
[RETURN]	Return to Operation Menu or Test Mode Menu
[NEXT], [PREV]	Transition between sub modes of menu
[1] to [9], [0]	Selection of menu items
Cursor UP/DOWN	Increase/Decrease in manually adjusted value

0. Disc Check Memory

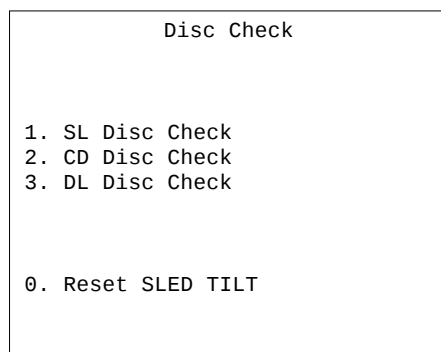

On this screen, the mirror time is measured to judge the disc and it is written to the EEPROM. First load DVD SL disc and press [1], next load CD disc and press [2], and finally load DVD DL disc and press [3].


The adjustment must be executed more than once after default data were written. External vibration or shock to the player must not be given. Reference value for DVD is from 10 to 20, and for CD, from 28 to 4F.

Check that the value of CD is larger than that of DVD.

When those values are beyond a range perform this adjustment again.

From this screen, you can go to another mode by pressing [NEXT] or [PREV] key, but you cannot enter this mode from another mode. You can enter this mode from the Operation Menu screen only.


1. Disc Type

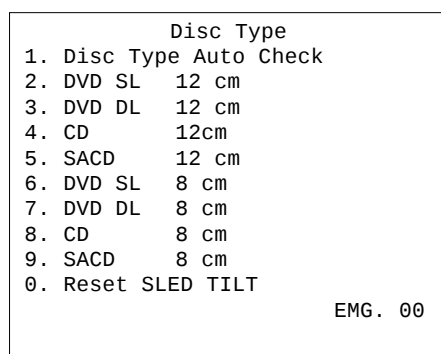


On this screen, select the disc type. To select the disc type, press the number of the loaded disc. The selected disc type is displayed at the bottom. Selecting [1] automatically selects and displays the disc type. In case of wrong display, retry "Disc Check Memory". Also, opening the tray causes the set disc type to be cleared. In this case, set the disc type again after loading.

In performing manual operation, the disc type must be set.

Once the disc type has been selected, the sector address or time code display field will appear as shown below. These values are displayed when PLL is locked.

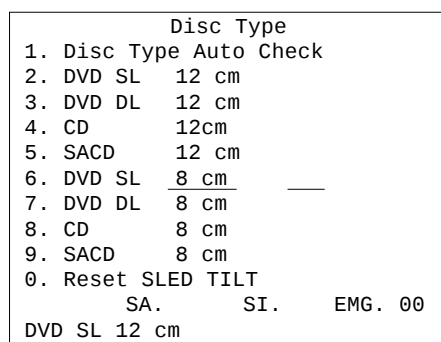

Display when DVD SL 12cm disc was selected

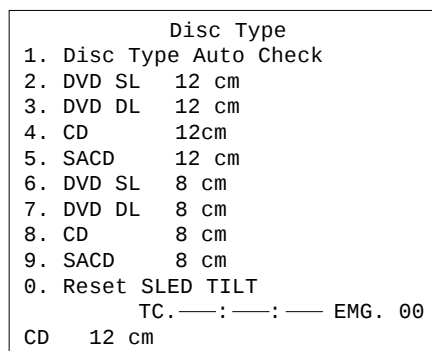

Display when CD 12cm disc was selected


[0] Reset SLED TILT Reset the Sled and Tilt to initial position.

[1] Disk Type Check Judge automatically the loaded disc. As the judged result is displayed at the bottom of screen, make sure that it is correct.

If Disc Check Memory menu has not been executed after EEPROM default setting, the disc type cannot be judged. In this case, return to the initial menu and make a check for three types of discs (SL, DL, CD).

[2] to [9] Select the loaded disc. The adjusted value is written to the address of selected disc. No further entry is necessary if [1] was selected.

2. Servo Control

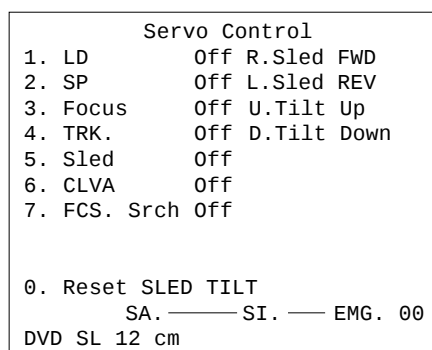

On this screen, the servo on/off control necessary for replay is executed. Normally, turn on each servo from 1 sequentially and when CLVA is turned on, the usual trace mode becomes active. In the trace mode, DVD sector address or CD time code is displayed. This is not displayed where the spindle is not locked.

The spindle could run overriding the control if the spindle system is faulty or RF is not present. In such a case, do not operate CLVA.

[0] Reset SLED TILT	Reset the Sled and Tilt to initial position.
[1] LD	Turn ON/OFF the laser.
[2] SP	Turn ON/OFF the spindle.
[3] Focus	Search the focus and turn on the focus.
[4] TRK	Turn ON/OFF the tracking servo.
[5] Sled	Turn ON/OFF the sled servo.
[6] CLVA	Turn ON/OFF normal servo of spindle servo.
[7] FCS. Srch	Apply same voltage as that of focus search to the focus drive to check the focus drive system.
→ Sled FWD	Move the sled outward. Perform this operation with the tracking servo turned off.
← Sled REV	Move the sled inward. Perform this operation with the tracking servo turned off.
↑ Tilt UP	Move the tilt upward.
↓ Tilt DOWN	Move the tilt downward.

The following menus are normally not used.

3. Track/Layer Jump

4. Manual Adjustment

5. Auto Adjustment

The persons who do not know well about these menus should not use them.

6. Memory Check

EEPROM DATA	-- DL --	
CD SACD	SL L0 L1	
Focus Gain	xx xx	xx xx xx
TRK. Gain	xx xx	xx xx xx
Focus Offset	xx xx	xx xx xx
TRK. Offset	xx xx	xx xx xx
L. F. Offset	xx xx	xx xx xx
Analog FRSW	xx xx	xx xx xx
PLL DAC Gain	xx xx	xx xx xx
EQ Boost	xx xx	xx xx xx
Jitter	xx xx	xx xx xx
Mirror Time	xx	xx xx
—	CLEAR: Default Set	

This screen displays current servo adjusted data stored in the EEPROM. Though adjusted data can be initialized with the [CLEAR] key, they cannot be restored after initialization.

So, before clearing, make a note of the adjusted data.

For reference, the drive has been designed so that the gain center value is 20 and offset value is 80. Other values will be in a range of 10 to 80. If extreme value such as 00 or FF is set, adjustment will be faulty. In such a case, check for disc scratch or cable disconnection, then perform adjustment again.

6-6. MECHA AGING

Mecha Aging
Press OPEN key
Abort: STOP key

On the Test Mode Menu screen, selecting [3] executes the aging of mechanism. First, open the tray and load a disc. Press the [PLAY] key, and the aging will start. When the tray is closed, the disc type and size are judged and displayed. During aging, the repeat cycle is displayed. Aging can be aborted at any time by pressing the [STOP] key. After the operation has stopped, unload the disc and press again the [STOP] key or the [RETURN] key to return to the Test Mode Menu.

6-7. EMERGENCY HISTORY

### MEG. History ###									
Laser Hours				CD	xxxxxxxh				
				DVD	xxxxxxxh				
1.	00	00	00	00	00	00	00	00	00
	00	00	00	00	00	00	00	00	00
2.	00	00	00	00	00	00	00	00	00
	00	00	00	00	00	00	00	00	00
Select: 1 - 9					Scroll: UP/DOWN				
(1: Last EMG.)					Exit: Return				

On the Test Mode Menu screen, selecting [4] displays the information such as servo emergency history. The history information from last 1 up to 10 can be scrolled with [↑] key or [↓] key. Also, specific information can be displayed by directly entering that number with ten keys.

The upper two lines display the laser ON total hours. Data below minutes are omitted.

Clearing History Information

Clearing laser hours

- ◎ Press [DISPLAY] and [CLEAR] keys in this order.
Both CD and DVD data are cleared.

Clearing emergency history


- ◎ Press [TITLE] and [CLEAR] keys in this order.

Initializing set up data

- ◎ Press [DVD] and [CLEAR] keys in this order.

The data have been initialized when "Set Up Initialized" message is displayed. The EMG. History screen will be restored soon.

How to see Emergency History

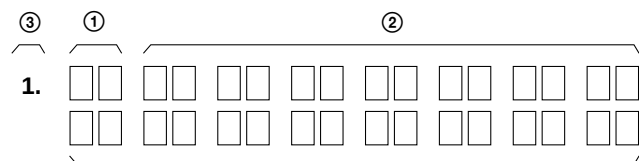

①: Emergency Code

②: Don't Care

These codes are used for verification of software designing.

③: Historical order 1 to 9

Emergency Codes List

- 10: Communication to IC201 (MB-86 board) failed.
- 11: Each servo for focus, tracking, and spindle is unlocked.
- 12: Communication to EEPROM, IC101 (MB-86 board) failed.
- 13: Writing of hours meter data to EEPROM, IC101 (MB-86 board) failed.
- 14: Communication to Servo DSP IC404 (MB-86 board) failed, or Servo DSP is faulty.
- 20: Initialization of tilt servo and sled servo failed. They are not placed in the initial position.
- 21: Tilt servo operation error
- 22: Syscon made a request to move the tilt servo to wrong position.
- 23: Sled servo operation error
- 24: Syscon made a request to move the sled servo to wrong position.
- 30: Tracking balance adjustment error
- 31: Tracking gain adjustment error
- 32: Focus balance adjustment error
- 33: Focus bias adjustment error
- 34: Focus gain adjustment error
- 35: Tilt servo adjustment error
- 36: RF equalizer adjustment error
- 37: RF group delay adjustment error
- 38: Jitter value after adaptive servo operation is too large.
- 40: Focus servo does not operate.
- 41: With a dual layer (DL) disc, focus jump failed.
- 50: CLV (spindle) servo does not operate.
- 51: Spindle does not stop.
- 60: With a DVD disc, Syscon made a request to seek nonexistent address.
- 61: With a CD disc, Syscon made a request to seek nonexistent address.
- 62: With a CD disc, Syscon made a request to seek nonexistent track No. and index No.
- 63: With a DVD disc, seeking of target address failed.
- 64: With a CD disc, seeking of target address failed.
- 65: With a CD disc, seeking of target index failed.
- 70: With a DVD disc, physical information data could not be read.
- 71: With a CD disc, TOC data could not be read.
- 80: Disc type judgment failed.
- 81: As disc type judgment failed, retry was repeated.
- 82: As disc type judgment failed, a measurement error occurred.
- 83: Disc type could not be judged within the specified time.
- 84: Illegal command code was received from Syscon.
- 85: Illegal command was received from Syscon.

6-8. VERSION INFORMATION

## Version Information ##			
IF con.	Ver. x.	xxx (xxxx)	
	Group	00	
SYScon.	Ver. x.	xxx (xxxx)	
	Model	xx	
	Region	0x	
Servo DSP.	Ver. 1.	xxxx	
Exit: RETURN			

On the Test Mode Menu screen, selecting [5] displays the ROM version and region code.

The parenthesized hexadecimal number in version field is checksum value of ROM.

6-9. VIDEO LEVEL ADJUSTMENT


On the Test Mode Menu screen, selecting [6] displays color bars for video level adjustment. During display of color bars, OSD disappears but the menu screen will be restored if pressing any key.

Measurement point : LINE OUT VIDEO
(75 Ω terminating resistance)

Measuring instrument : Oscilloscope

Adjustment device : RV501 on MB-86 board

Specified value : 1.0 ± 0.02 Vp-p

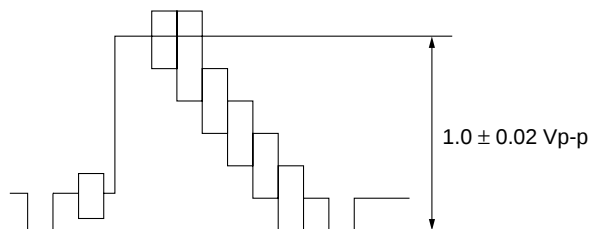

6-10. IF CON SELF DIAGNOSTIC FUNCTION

1. AI-17 BOARD (IF CON) TEST MODE

The front board test mode is the IF CON self diagnostic mode. The IF CON can diagnose the functions of the front panel boards that the IF CON controls. Normally, the IF CON makes a serial communication with the SYSTEM CONTROL and operates following the commands from the SYSTEM CONTROL, but in the Test mode, the IF CON operates independently from the SYSTEM CONTROL.

In the Test mode, the following functions can be checked.

1. Button function
2. Remocon receiving function
3. SYSTEM CONTROL-IF CON serial communication
4. Click shuttle function
5. Fluorescent display tube lighting check
 - Grid check
 - Anode check
6. LED control function

In the Test mode, the set operates same as usual, except voltage monitoring, communication monitoring, display of fluorescent display tube, and LED control.

1. The routine that monitors +3.3 V (PCONT) of MB-86 board is not provided.
2. The monitoring timer for serial communication with the SYSTEM CONTROL is not provided. The set is not placed in the Standby mode, even if the communication with SYSTEM CONTROL is normal.
3. Display of fluorescent display tube (normally, display is made following the commands from SYSTEM CONTROL)
4. LED control (normally, control is made following the commands from SYSTEM CONTROL)

2. OPERATION OF SELF CHECK MODE

The Self Check mode is the function to conduct the basic test to the FL display and DVD panel section.


2-1. Self Check Mode Transition Processing

At the AC Power ON after IF CON was reset, the input to 8pin (P60) is judged and if "Low" is entered, the main unit transits to the Self Check mode. In this port input judgment, the result of 3-time attempts must be same (assuming that the MB-86 board is not connected). While pressing the **[STOP]** key on the main unit with the IF CON in STANDBY mode, enter **[RETURN]** → **[DISPLAY]** (or **[SET UP]**) on the remote commander, and the unit transits to the Self Check Mode. The Self Check mode terminates when the IF CON transits to the STANDBY mode.


2-2. Operation of Auto Self Check

When the Self Check mode becomes active at the AC Power ON or by key input, the test display of the following steps (1) to (4) is repeated.

(1) FLD and LED all ON (for 5 seconds)

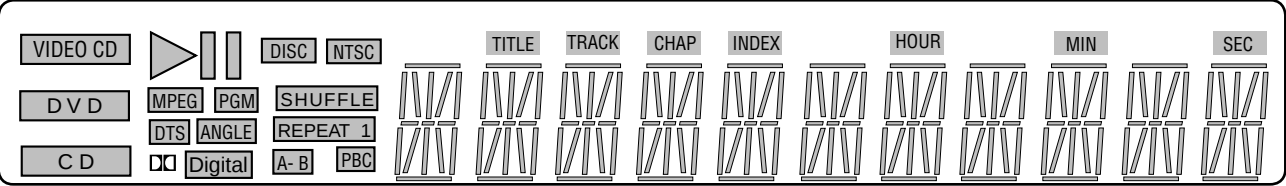


(2) MODEL display (for 2 seconds)

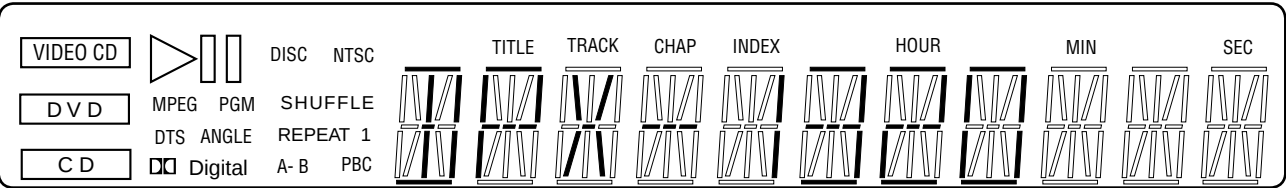


If MODEL is judged as Step UP-DD

Contents of display
“DPX-1300” Basic
“DPX-1310” Entry-DD
“DPX-1320” Step UP-DD

(3) Version display (for 2 seconds)

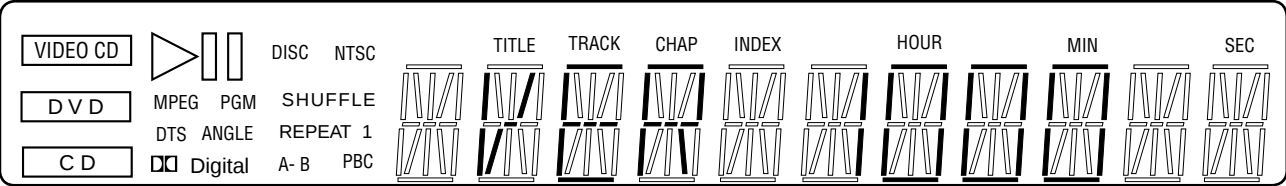

(4) ROM creation date display (for 2 seconds)

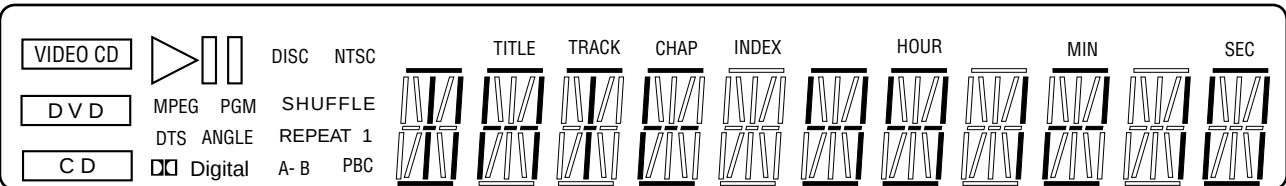

2-3. Each Self Check Function

Each Self Check function tests the FLD display, LED display, and key input.

Basic, Entry-DD, Step Up-DD

Input Voltage [V]	IC404: Pin No. (Signal)			
	Pin ③ (AN3)	Pin ② (AN4)	Pin ① (AN5)	Pin ⑦ (AN7)
0	STOP	TITLE	RIGHT	V_3D
0.70	PAUSE	DVD MENU	UP	DVE
1.31	DISP	NEXT	ENTER	HP_V
1.97	RETURN	PREV	DOWN	SHUFFLE
2.59	JOG		LEFT	REPEAT
3.3				

1-3-1. FLD and LED All ON


1-3-1-1. Transition Keys in Self Check Mode

- **STOP** key and **PLAY** key on the main unit
- **LEFT** key on the main unit and the remote commander

2-3-1-2. Operation and Display

In this mode, all LEDs except STANDBY LED and all segments of FLD turn ON.

Example of FLD all ON

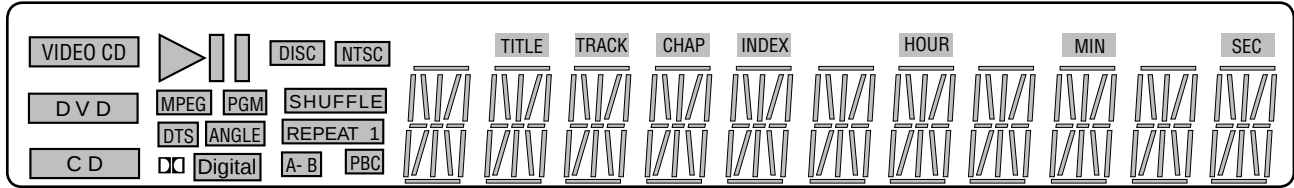

2-3-2. Main Unit Key Name Display and Key Code Display


2-3-2-1. Transition Keys in Self Check Mode

- Keys on main unit except keys transited in self check


2-3-2-2. Operation and Display

When a key on the main unit is pressed in the Self Check mode, the name of that key is displayed on the FLD. Also, the key name display and the key code display can be switched with the **DIS-PLAY** key on the remote commander. “NOTHING” is displayed when nothing is entered. Also, VIDEO CD, DVD, and CD segments turn on when a communication error occurred.


FLD display (at input of **PLAY** key on the main unit)

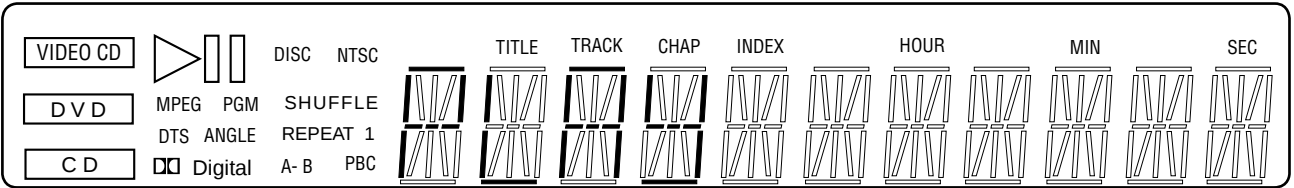


Key code display (at input of **PLAY** key, Key code: 0Ah)

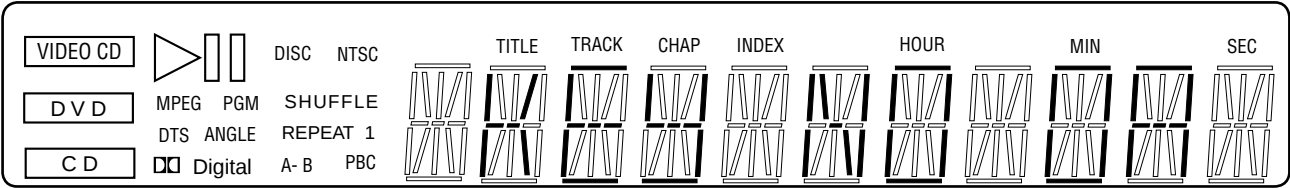

At input of faulty voltage

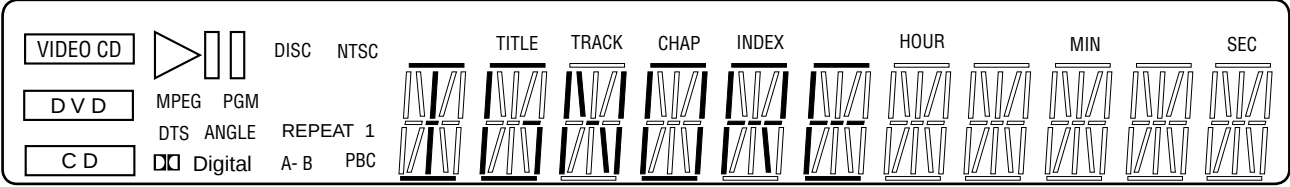

When two keys are pressed

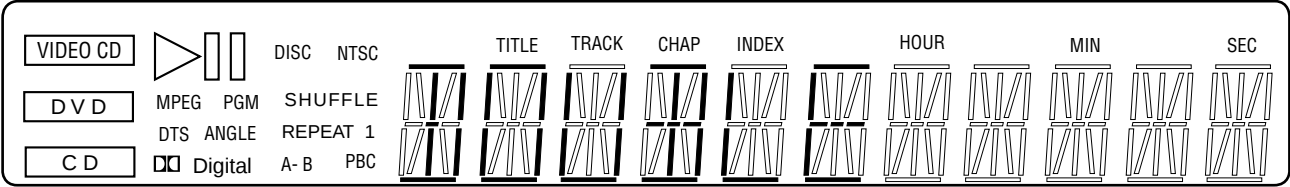

1-3-3. Remote Commander Key Name Display and Key Code Display


1-3-3-1. Transition Keys in Self Check Mode

- Remote commander keys except keys transited in self check


2-3-3-2. Operation and Display

When a key on the remote commander is pressed in the Self Check mode, the name of that key is displayed on the FLD. Also, the key name display and the key code display can be switched with the **DISPLAY** key on the remote commander. “NOTHING” is displayed when nothing is entered. Also, VIDEO CD, DVD, and CD segments turn on when a communication error occurred.

Remote commander key name display (at input of **PAUSE** key)

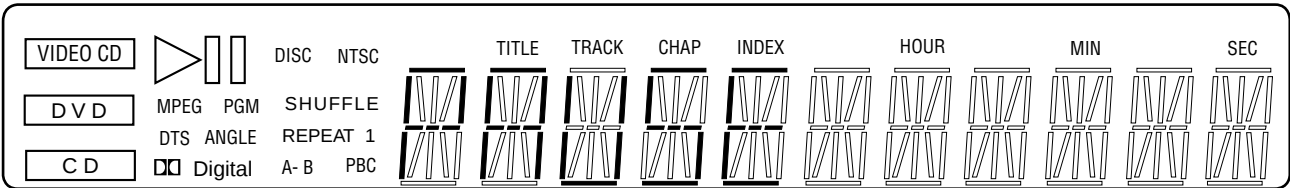


Remote commander key code display (at input of **PAUSE** key, Key code: 39h)

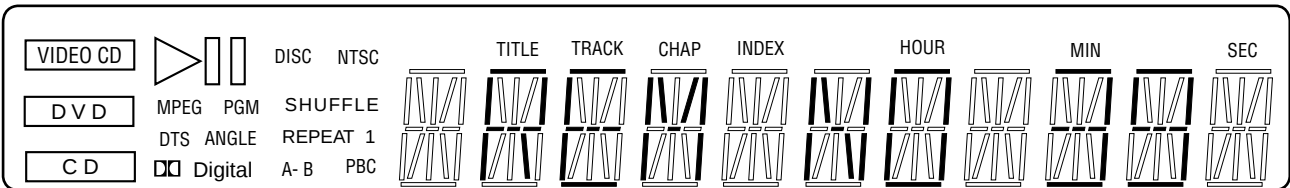


2-3-4. Communication Monitoring Display

The communication state is monitored and displayed while the key name on the main unit and the remote commander is displayed. When the communication to the System Controller failed, VIDEO CD, DVD, and CD segments turn on.

Communication error display (at no key input)

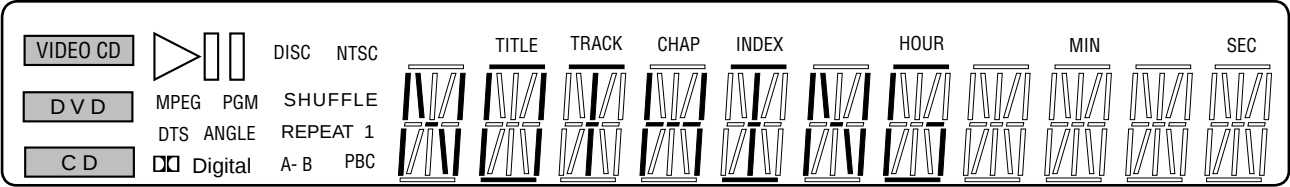

Communication error display (at code display without input of the remote commander)

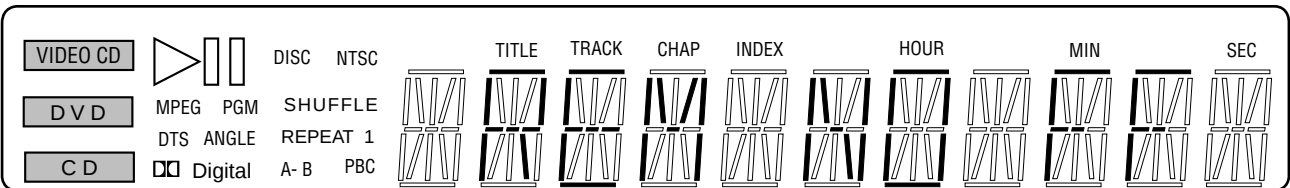

2-3-5. FLD Anode Test Display and SHUTTLE Click Operation Test


2-3-5-1. Transition Keys in Self Check Mode

- [RIGHT] on the main unit and the remote commander
- SHUTTLE on the main unit and the remote commander during Anode Test display


2-3-5-2. Operation and Display

The Self Check mode transits to this mode when [RIGHT] key is entered. Only the first segment of each grid of FLD turns on, and each time the SHUTTLE is entered, the segment of each grid is switched in order. When SHUTTLE input is clockwise, the segment switches in 1 → 2 → 3 direction, or counterclockwise it switches in 3 → 2 → 1 direction. This tests whether each segment turns on individually. Also, if the main unit does not have the JOG/SHUTTLE, use the remote commander JOG/SHUTTLE to switch over the segment display position.

Display at the start of Anode Test

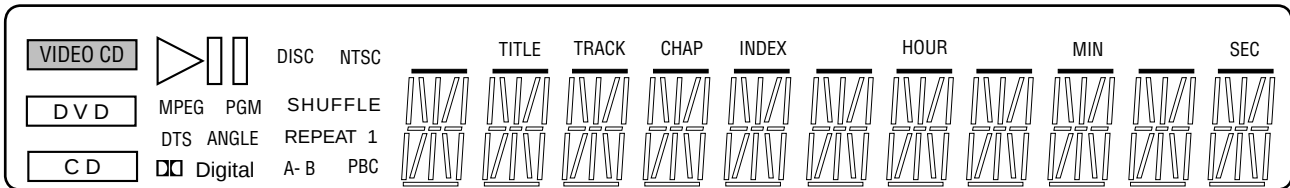

↓ (Input in CW direction)

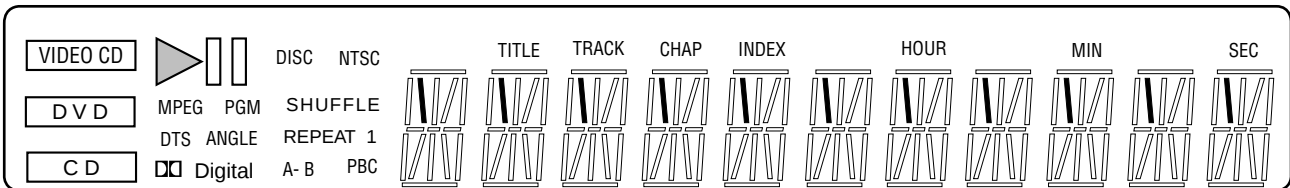

2-3-6. FLD Grid Test Display and SHUTTLE Click

Operation Test



2-3-6-1. Transition Keys in Self Check Mode

- **[UP]** on the main unit and the remote commander
- SHUTTLE on the main unit and the remote commander during Grid Test display

2-3-6-2. Operation and Display

The Self Check mode transits to this mode when **[UP]** key is entered. The first grid of FLD all turns on and other grids turn off. Each time the SHUTTLE is entered, the grid is switched in order. When SHUTTLE input is clockwise, the grid switches in 1 → 2 → 3 direction, or counterclockwise it switches in 3 → 2 → 1 direction. This tests whether each grid turns on individually.

Display at the start of Grid Test

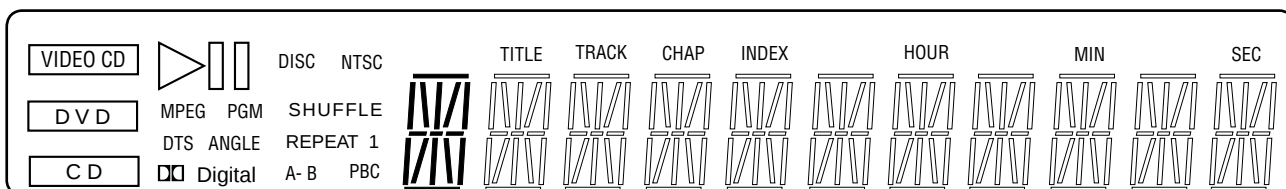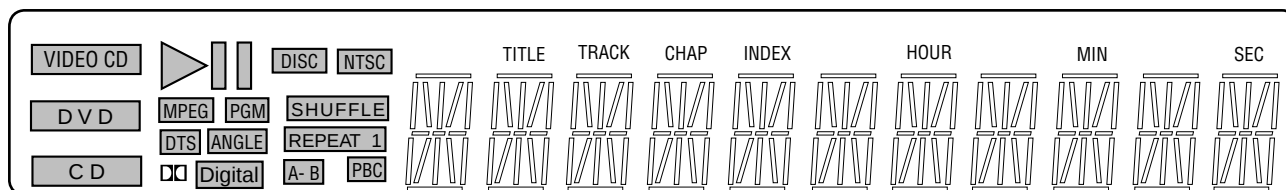

2-3-7. LED Test Display


2-3-7-1. Transition Keys in Self Check Mode

- **[DOWN]** on the main unit and the remote commander
- SHUTTLE on the main unit and the remote commander during LED Test display

2-3-7-2. Operation and Display

LED is switched in order by the input of JOG/SHUTTLE. Also, LED ON/OFF is switched by the input of same key as the function that turns on the LED concerned. For the MULTI LED only, there is no key which switches that function, and therefore use the **[RETURN]** key on the main unit.

FLD display during LED Test

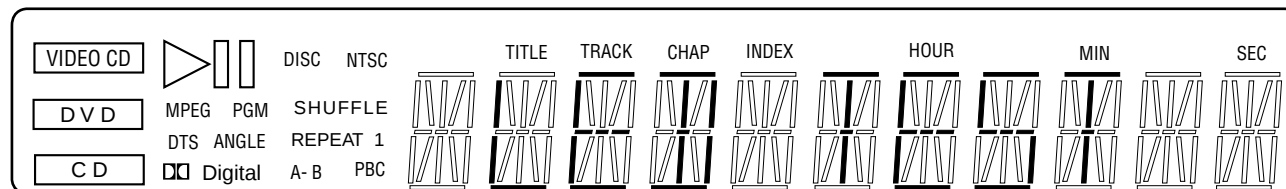



2-3-8. Beep Sound Test

2-3-8-1. Transition Keys in Self Check Mode

- Input of a key on main unit

2-3-8-2. Operation and Display

In the Self Check mode, each time a key on the main unit is entered, a beep sound of 2kHz (100ms) is generated.

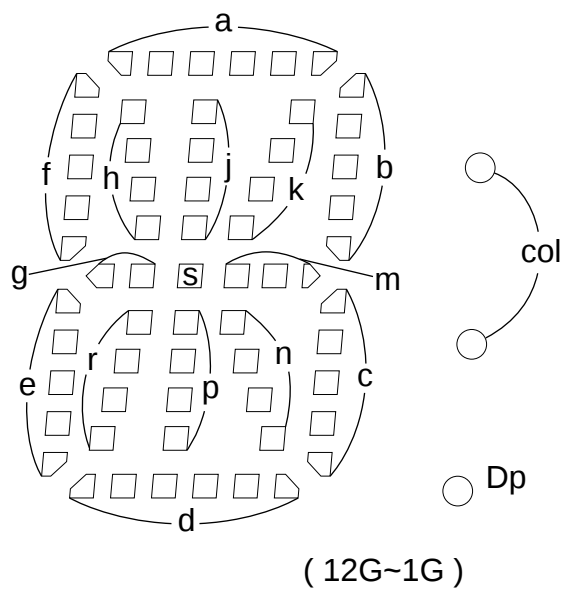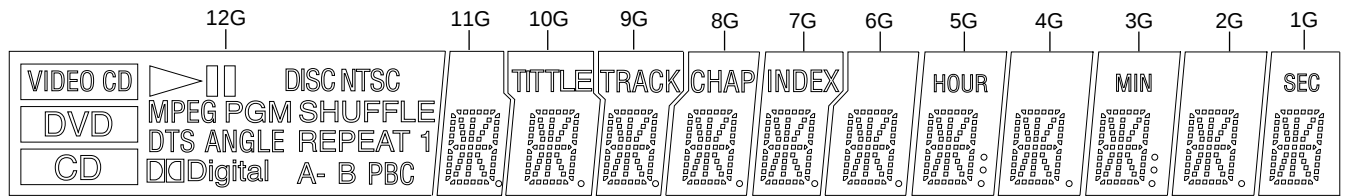

ANODE CONNECTION

	12G	11G	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G
P1	VIDEO CD	a	a	a	a	a	a	a	a	a	a	a
P2	▶	h	h	h	h	h	h	h	h	h	h	h
P3		j	j	j	j	j	j	j	j	j	j	j
P4	DISC	k	k	k	k	k	k	k	k	k	k	k
P5	NTSC	b	b	b	b	b	b	b	b	b	b	b
P6	DVD	f	f	f	f	f	f	f	f	f	f	f
P7	MPEG	m	m	m	m	m	m	m	m	m	m	m
P8	PGM	s	s	s	s	s	s	s	s	s	s	s
P9	SHUFFLE	g	g	g	g	g	g	g	g	g	g	g
P10	DTS	e	e	e	e	e	e	e	e	e	e	e
P11	ANGLE	n	n	n	n	n	n	n	n	n	n	n
P12	REPEAT	p	p	p	p	p	p	p	p	p	p	p
P13	1	r	r	r	r	r	r	r	r	r	r	r
P14	PBC	c	c	c	c	c	c	c	c	c	c	c
P15	B	d	d	d	d	d	d	d	d	d	d	d
P16	A-	Dp	Dp	Dp	Dp	Dp	Dp	Dp	Dp	Dp	Dp	-
P17	DDDigital	-	-	-	-	-	-	col	-	col	-	-
P18	CD	-	TITLE	TRACK	CHAP	INDEX	-	HOUR	-	MIN	-	SEC

3. TROUBLESHOOTING

3-1. Test Mode is not activated

With the set assembled in the front panel, the Test mode does not become active if any button was pressed by any reason. Under this condition, the power is not turned on even in the normal status. (The set is kept in Standby status = Red LED is kept on) Not only the buttons are inactive, but also a signal from remote commander is not accepted. To check this condition, with the self check port (pin ⑧ of IF CON) kept in “Low” status, supply the AC power, so that the Test mode is forcibly activated. On the board, short the lands where SELF is printed. The IF CON checks the self check port only after the power on reset (only when AC is supplied; not in Standby status). If any button was pressed, the button name should be displayed on the FL display tube. Though no button is pressed this time, display of other than NOTHING implies that the button was pressed.

3-2. Power is not turned on

- ① Red (STANDBY) LED does not light up when AC was supplied. The power (EVER 3.3 V) is not supplied.
X401 is oscillating.
- ② Red (STANDBY) LED is kept on though POWER button was pressed. Any button is kept pressed.
PONCHK (IF CON pin ⑥) is over 0.1 V.
- ③ Green LED lights up when POWER button was pressed, but red LED lights up again after several seconds. PONCHK (IF CON pin ⑥) is abnormal. (Slow rise time from 0.1 V to 1.5 V. Voltage must be less than 1.5 V)
SYSTEM CONTROL does not operate normally.

3-3. Power is turned on and off repeatedly

EVER 3.3 V may not be supplied normally. Check that D430 is not broken.

SECTION 7

ELECTRICAL ADJUSTMENT

In making adjustment, refer to 7-3. Adjustment Related Parts Arrangement.

Note: During diagnostic check, the characters and color bars can be seen only with the NTSC monitor. Therefore, for diagnostic check, use the monitor that supports both NTSC and PAL modes.

Use the reference disc for PAL for check, and use the reference disc for NTSC for adjustment.

This section describes procedures and instructions necessary for adjusting electrical circuits in this set.

Instruments required:

- 1) Color monitor TV
- 2) Oscilloscope 1 or 2 phenomena, band width over 100 MHz, with delay mode
- 3) Frequency counter (over 8 digits)
- 4) Digital voltmeter
- 5) Standard commander (RMT-D115E/D115P/D116P/D120E/D120O/D120P)
- 6) DVD reference disc
 - HLX-501 (J-6090-071-A) (dual layer) (NTSC)
 - HLX-503 (J-6090-069-A) (single layer) (NTSC)
 - HLX-504 (J-6090-088-A) (single layer) (NTSC)
 - HLX-505 (J-6090-089-A) (dual layer) (NTSC)
 - HLX-506 (J-6090-077-A) (single layer) (PAL)
 - HLX-507 (J-6090-078-A)(dual layer) (PAL)
- 7) SACD reference disc
 - HLXA-509 (J-6090-090-A)

Abbreviation:

AUS : Australian
EA : Saudi Arabia

7-1. POWER SUPPLY ADJUSTMENT

1. HS16S9E Board

Mode	E-E
Instrument	Digital voltmeter
EVER +3 V Check	
Test point	CN201 pin ①
Specification	3.6 ± 0.2 Vdc
SW +3 V Check	
Test point	CN201 pin ②, ③
Specification	3.4 ± 0.2 Vdc
EVER+5 V Check	
Test point	CN201 pin ④
Specification	5.3 ± 0.3 Vdc
SW +10 V Check	
Test point	CN201 pin ⑦, ⑧
Specification	$10.5^{+1.0}_{-1.5}$ Vdc
SW -10 V Check	
Test point	CN201 pin ⑪
Specification	$-10.0^{+1.5}_{-1.0}$ Vdc

Checking method:

- 1) Confirm that each voltage satisfies the specification.

7-2. ADJUSTMENT OF VIDEO SYSTEM

1. Video Level Adjustment (MB-86 BOARD)

<Purpose>

This adjustment is made to satisfy the NTSC standard, and if not adjusted correctly, the brightness will be too large or small.

Mode	Video level adjustment in test mode
Signal	Color bars
Test point	LINE OUT (VIDEO) connector (75 Ω terminated)
Instrument	Oscilloscope
Adjusting element	RV501
Specification	1.0 ± 0.02 Vp-p

Adjusting method:

- 1) In the test mode initial menu "6" Video Level Adjustment, set so that color bars are generated.
- 2) Adjust the RV501 to attain 1.0 ± 0.02 Vp-p.



Figure 7-1

2. S-terminal Output Check (MB-86 BOARD)

<Purpose>

Check S-terminal video output. If it is incorrect, pictures will not be displayed correctly in spite of connection to the TV with a S-terminal cable.

Mode	Video level adjustment in test mode
Signal	Color bars
Test point	S VIDEO OUT (S-Y) connector (75 Ω terminated)
Instrument	Oscilloscope
Specification	1.0 ± 0.1 Vp-p

Checking method:

- 1) In the test mode initial menu "6" Video Level Adjustment, set so that color bars are generated.
- 2) Confirm that the S-Y level is 1.0 ± 0.1 Vp-p.



Figure 7-2

3. Checking Component Video Output B-Y (MB-86 BOARD) (DVP-S335: E, EA/S336: AUS/S345/S735D)

<Purpose>

This checks component video output B-Y. If it is incorrect, correct colors will not be displayed when connected to, for instance, projector.

Mode	Video level adjustment in test mode
Signal	Color bars
Test point	COMPONENT VIDEO OUT (B-Y) connector (75 Ω terminated)
Instrument	Oscilloscope
Specification	700 ± 70 mVp-p

Checking method:

- 1) Confirm that the B-Y level is 700 ± 70 mVp-p.

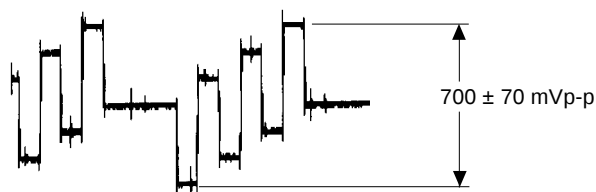


Figure 7-3

4. Checking Component Video Output R-Y (MB-86 BOARD) (DVP-S335: E, EA/S336: AUS/S345/S735D)

<Purpose>

This checks component video output R-Y. If it is incorrect, correct colors will not be displayed when connected to, for instance, projector.

Mode	Video level adjustment in test mode
Signal	Color bars
Test point	COMPONENT VIDEO OUT (R-Y) connector (75 Ω terminated)
Instrument	Oscilloscope
Specification	700 ± 70 mVp-p

Checking method:

- 1) Confirm that the R-Y level is 700 ± 70 mVp-p.

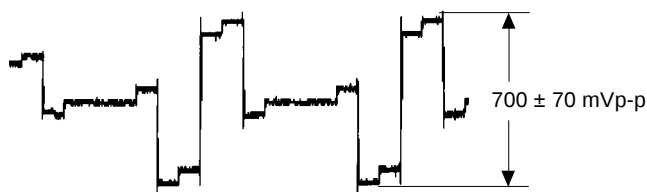


Figure 7-4

5. Checking Component Video Output Y (MB-86 BOARD) (DVP-S335: E, EA/S336: AUS/S345/S735D)

<Purpose>

This checks component video output Y. If it is incorrect, correct brightness will not be attained when connected to, for instance, projector.

Mode	Video level adjustment in test mode
Signal	Color bars
Test point	COMPONENT VIDEO OUT (Y) connector (75 Ω terminated)
Instrument	Oscilloscope
Specification	1.0 ± 0.1 Vp-p

Checking method:

- 1) Confirm that the Y level is 1.0 ± 0.1 Vp-p.




Figure 7-5

6. Checking RGB Output R (MB-86 BOARD)

<Purpose>

This checks RGB output R. If it is incorrect, pictures will not be displayed correctly in spite of connection to the TV with an EURO AV connecting cord.

Mode	In test mode, Push [0] for Syscon Diagnosis and push [7] for Video and push [5] for RGB out
Signal	Color bars
Test point	EURO AV 1 (RGB)-TV connector pin ⑬ (75 Ω terminated)
Instrument	Oscilloscope
Specification	700 ± 70 mVp-p

Checking method:

- 1) Confirm that the R level is 700 ± 70 mVp-p.




Figure 7-6

7. Checking RGB Output G (MB-86 BOARD)

<Purpose>

This checks RGB output G. If it is incorrect, pictures will not be displayed correctly in spite of connection to the TV with an EURO AV connecting cord.

Mode	In test mode, Push [0] for Syscon Diagnosis and push [7] for Video and push [5] for RGB out
Signal	Color bars
Test point	EURO AV 1 (RGB)-TV connector pin ⑭ (75 Ω terminated)
Instrument	Oscilloscope
Specification	700 ± 70 mVp-p

Checking method:

- 1) Confirm that the G level is 700 ± 70 mVp-p.



Figure 7-7

8. Checking RGB Output B (MB-86 BOARD)

<Purpose>

This checks RGB output B. If it is incorrect, pictures will not be displayed correctly in spite of connection to the TV with an EURO AV connecting cord.

Mode	In test mode, Push [0] for Syscon Diagnosis and push [7] for Video and push [5] for RGB out
Signal	Color bars
Test point	EURO AV 1 (RGB)-TV connector pin ⑮ (75 Ω terminated)
Instrument	Oscilloscope
Specification	700 ± 70 mVp-p

Checking method:

- 1) Confirm that the B level is 700 ± 70 mVp-p.



Figure 7-8

9. Checking S Video Output S-C (MB-86 BOARD)

<Purpose>

This checks whether the S-C satisfies the NTSC Standard. If it is not correct, the colors will be too dark or light.

Mode	Video level adjustment in test mode
Signal	Color bars
Test point	S VIDEO OUT (S-C) connector (75 Ω terminated)
Instrument	Oscilloscope
Specification	286 ± 50 mVp-p (NTSC) 300 ± 100 mVp-p (PAL)

Checking method:


- 1) In the test mode initial menu “6” Video Level Adjustment, set so that color bars are generated.
- 2) Confirm that the S-C burst is 300 ± 100 mVp-p.




Figure 7-9

7-3. ADJUSTMENT RELATED PARTS ARRANGEMENT


MB-86 BOARD (SIDE A)

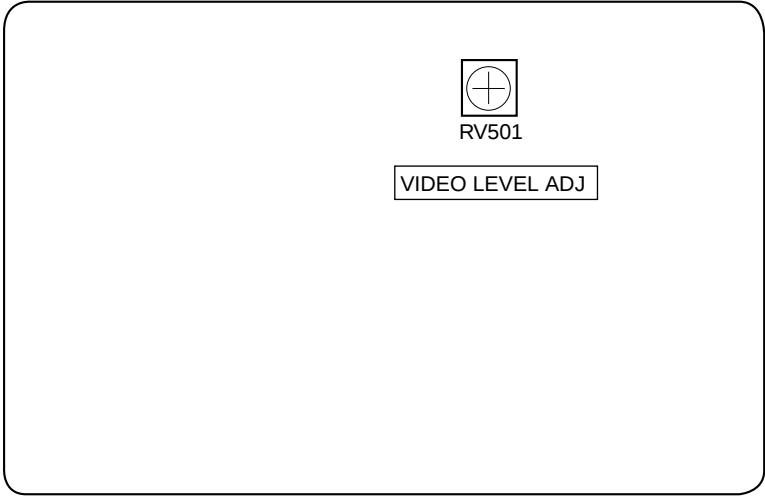

MB-86 BOARD (SIDE B)

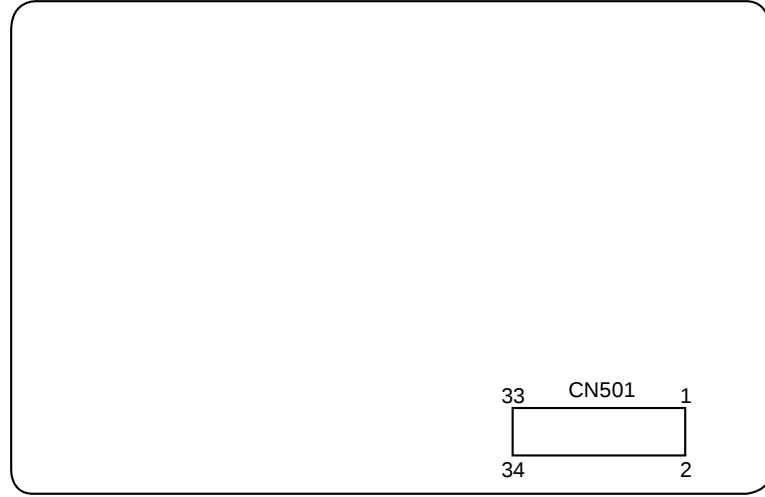

HS16S9E BOARD

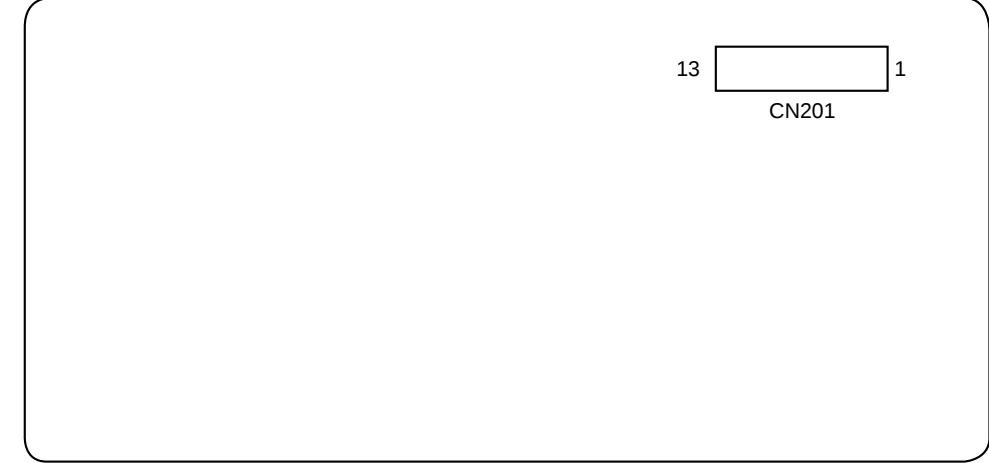

SECTION 8

REPAIR PARTS LIST

8-1. EXPLODED VIEWS

NOTE:

- -XX and -X mean standardized parts, so they may have some difference from the original one.

- Color Indication of Appearance Parts

Example:

KNOB, BALANCE (WHITE) . . . (RED)

↑ ↑
Parts Color Cabinet's Color

- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.


- The mechanical parts with no reference number in the exploded views are not supplied.

- Accessories and packing materials are given in the last of the electrical parts list.

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.


- Abbreviation
AUS : Australian
EA : Saudi Arabia
RU : Russian

8-1-1. CASE ASSEMBLY (S335/S336/S345/S535D)

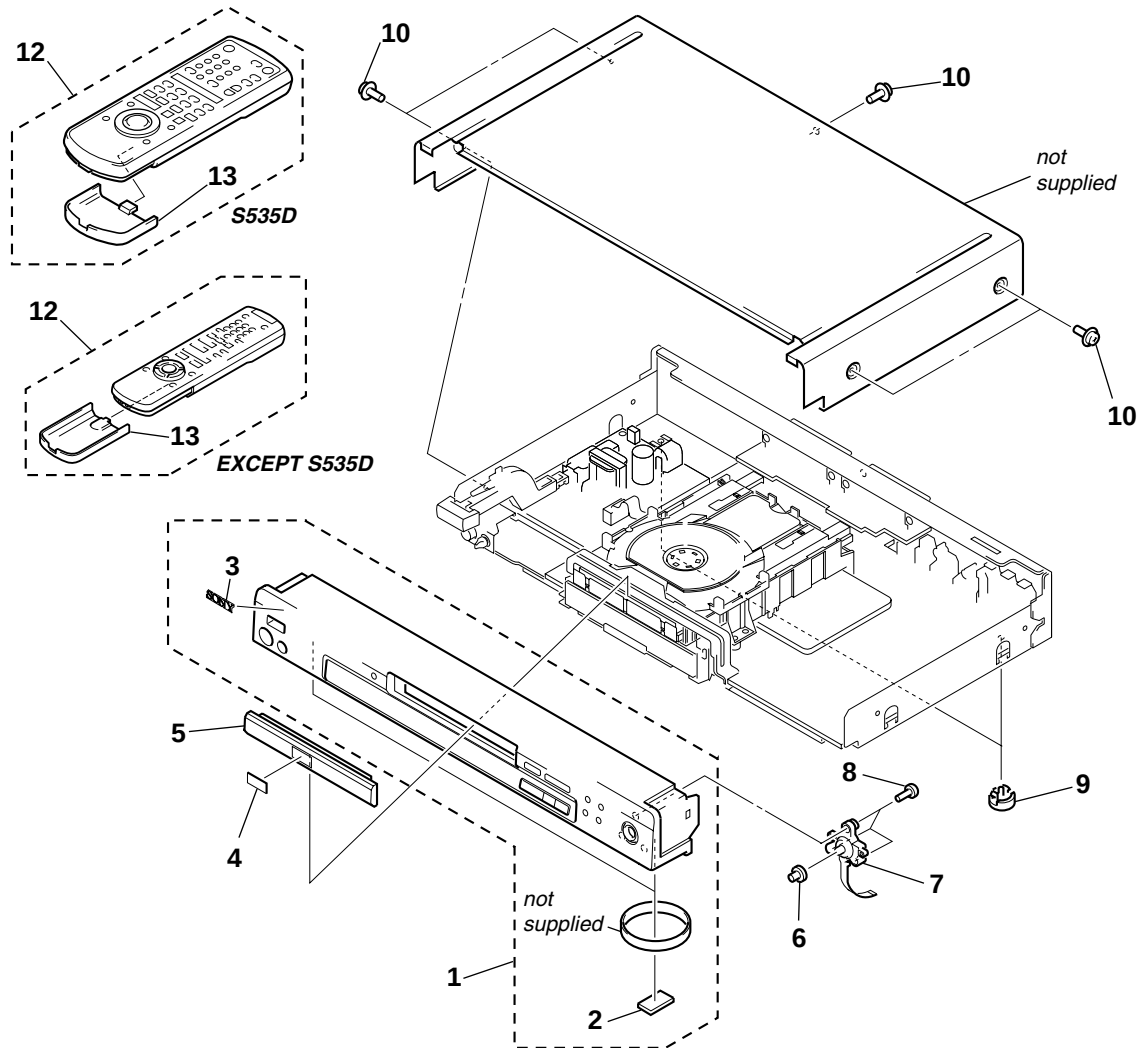


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
1	X-3950-398-1	PANEL ASSY, FRONT (S345)		6	3-059-322-31	STICK, CURSOR (S335/S535D)	
1	X-3950-399-1	PANEL ASSY, FRONT (S335)		6	3-059-322-41	STICK, CURSOR (S336)	
1	X-3950-400-1	PANEL ASSY, FRONT (S336)		6	3-059-322-51	STICK, CURSOR (S345)	
1	X-3950-412-1	PANEL ASSY, FRONT (S535D)		7	1-771-913-11	SWITCH, TACTILE	
2	3-059-349-11	CUSHION, FOOT		8	3-970-608-51	SUMITITE (B3), +BV	
3	4-217-485-01	EMBLEM (5-A), SONY (S336)		9	3-059-389-01	CUSHION (REAR), FOOT	
3	4-963-404-21	EMBLEM (5-A), SONY (S335/S535D)		10	3-710-901-11	SCREW, TAPPING (S335/S535D)	
3	4-963-404-41	EMBLEM (5-A), SONY (S345)		10	3-710-901-61	SCREW, TAPPING (S336/S345)	
4	3-975-726-61	EMBLEM, DVD (S336)		12	1-418-988-21	COMMANDER, STANDARD (RMT-D115P)	
4	3-975-726-71	EMBLEM, DVD (S335/S535D)				(S335: AEP, UK, RU/S336: AEP, UK)	
4	3-975-726-81	EMBLEM, DVD (S345)		12	1-418-988-31	COMMANDER, STANDARD (RMT-D115E)	
						(S335: E, EA/S336: AUS/S345)	
5	3-059-323-41	COVER, TRAY (S336)		12	1-418-991-21	COMMANDER, STANDARD (RMT-D116P)	
5	3-059-323-51	COVER, TRAY (S345)				(S535D)	
5	3-059-377-01	COVER, TRAY (S535D)		13	3-053-633-01	COVER, BATTERY	
5	3-061-152-01	COVER, TRAY (S335)				(for RMT-D115E/D115P/D116P)	

8-1-2. CASE ASSEMBLY (S735D)

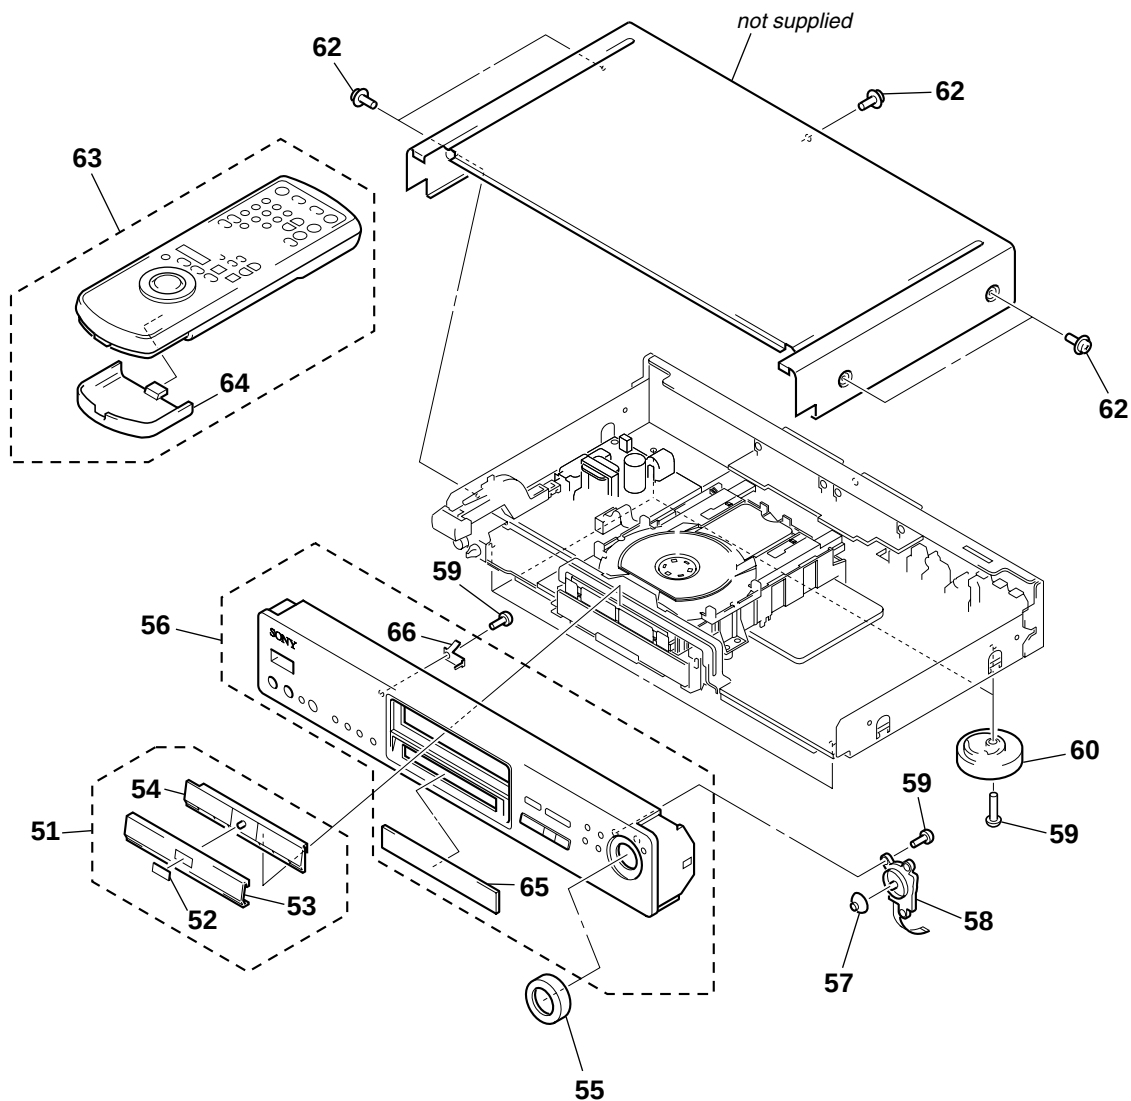

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	X-3950-318-1	COVER ASSY, TRAY		62	3-710-901-61	SCREW, TAPPING	
52	3-975-726-31	EMBLEM, DVD		63	1-418-989-31	COMMANDER, STANDARD (RMT-D120P)	
53	3-058-936-01	COVER (AL), TRAY				(AEP, UK, RU, E)	
54	3-058-935-01	COVER (M), TRAY		63	1-418-989-41	COMMANDER, STANDARD (RMT-D1200)	
55	3-058-939-01	RING, SHUTTLE				(E, AUS)	
56	X-3950-479-1	PANEL ASSY, FRONT		63	1-418-989-51	COMMANDER, STANDARD (RMT-D120E) (EA)	
57	3-058-938-01	STICK, CURSOR		64	3-055-539-01	COVER, BATTERY	
58	1-418-097-11	ENCORE, ROTARY				(for RMT-D120E/D1200/D120P)	
59	3-970-608-51	SUMITITE (B3), +BV		65	3-058-947-01	WINDOW, FL	
60	X-3950-447-1	FOOT ASSY (AEP, UK, RU)		66	3-058-944-01	PLATE (T), GROUND	
60	X-3950-449-1	FOOT ASSY (E, EA, AUS)					


8-1-3. CHASSIS ASSEMBLY

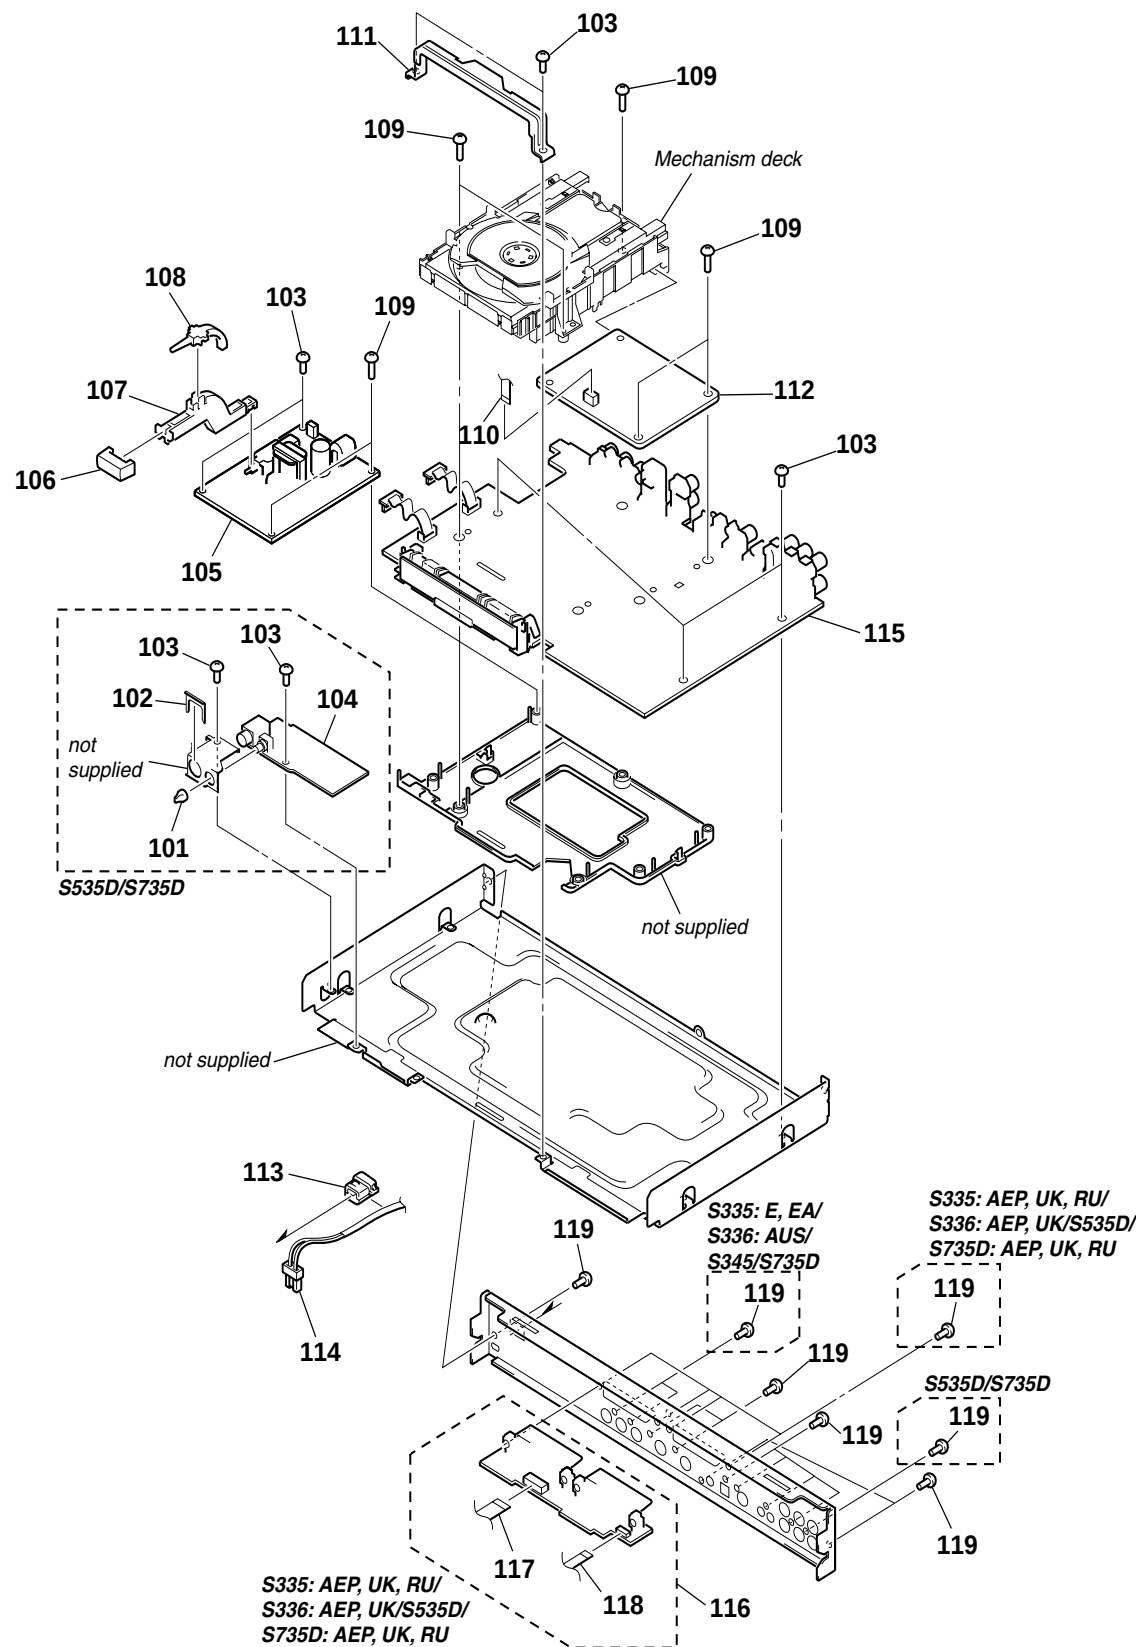

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	3-059-379-01	Knob, Volume (S535D)		* 112	A-6065-479-A	MB-86 Board, Complete (S735D: AEP8)	
101	3-059-379-11	Knob, Volume (S735D)		* 112	A-6065-480-A	MB-86 Board, Complete (S735D: RU)	
* 102	3-684-436-01	Plate, Mount (S535D/S735D)		* 112	A-6065-484-A	MB-86 Board, Complete (S735D: E)	
103	3-970-608-01	Sumitite (B3), +BV		* 112	A-6065-485-A	MB-86 Board, Complete (S735D: EA)	
* 104	A-6065-455-A	HP-127 Board, Complete (S535D)		* 112	A-6065-486-A	MB-86 Board, Complete (S735D: AUS)	
* 104	A-6065-470-A	HP-127 Board, Complete (S735D: E, EA, AUS)		113	4-966-267-11	Bushing (FBS001), Cord	
* 104	A-6065-476-A	HP-127 Board, Complete (S735D: AEP, UK, RU)		△ 114	1-769-744-91	Cord, Power (EXCEPT S336: AUS/S735D: AUS)	
* 105	1-468-506-31	Power Block (HS16S9E)		△ 114	1-790-588-11	Cord, Power (S336: AUS/S735D: AUS)	
106	3-059-319-21	Button, Power (S735D)		* 115	A-6065-442-A	AI-17 Board, Complete (S335: AEP, UK, RU/S336: AEP, UK)	
106	3-059-319-31	Button, Power (S335/S535D)		* 115	A-6065-453-A	AI-17 Board, Complete (S535D)	
106	3-059-319-41	Button, Power (S336)		* 115	A-6065-463-A	AI-17 Board, Complete (S335: E, EA/S336: AUS/S345)	
106	3-059-319-51	Button, Power (S345)		* 115	A-6065-477-A	AI-17 Board, Complete (S735D: AEP, UK, RU)	
107	3-059-320-11	Joint (P)		* 115	A-6065-482-A	AI-17 Board, Complete (S735D: E, EA, AUS)	
108	3-059-321-11	Indicator (P)		* 116	A-6065-444-A	ER-9 Board, Complete (S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU)	
109	3-061-608-01	Point (Ground), +BV S Tite Front		117	1-792-455-11	Cable, Flexible Flat (FAE-1) (S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU)	
110	1-792-457-11	Cable, Flexible Flat (FMM-33)		118	1-792-456-11	Cable, Flexible Flat (FEA-5) (S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU)	
111	3-059-388-01	Pillar, Multi		119	3-970-608-51	Sumitite (B3), +BV	
* 112	A-6065-443-A	MB-86 Board, Complete (S335: AEP2, UK2/S336: AEP4, UK)		120	3-058-948-11	Panel, Rear (S735D: AEP, UK, RU)	
* 112	A-6065-445-A	MB-86 Board, Complete (S335: AEP3/S336: AEP5)		120	3-059-326-61	Panel, Rear (S735D: E, EA, AUS)	
* 112	A-6065-446-A	MB-86 Board, Complete (S335: RU)		120	3-059-326-71	Panel, Rear (S535D)	
* 112	A-6065-448-A	MB-86 Board, Complete (S345)		120	3-059-390-11	Panel, Rear (S335: E, EA/S336: AUS/S345)	
* 112	A-6065-449-A	MB-86 Board, Complete (S335: E, EA)		120	3-059-390-21	Panel, Rear (S335: AEP, UK, RU/S336: AEP, UK)	
* 112	A-6065-450-A	MB-86 Board, Complete (S336: AUS)					
* 112	A-6065-452-A	MB-86 Board, Complete (S535D: AEP6)					
* 112	A-6065-454-A	MB-86 Board, Complete (S535D: AEP7, UK)					
* 112	A-6065-478-A	MB-86 Board, Complete (S735D: AEP9, UK)					

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

8-1-4. MECHANISM DECK SECTION

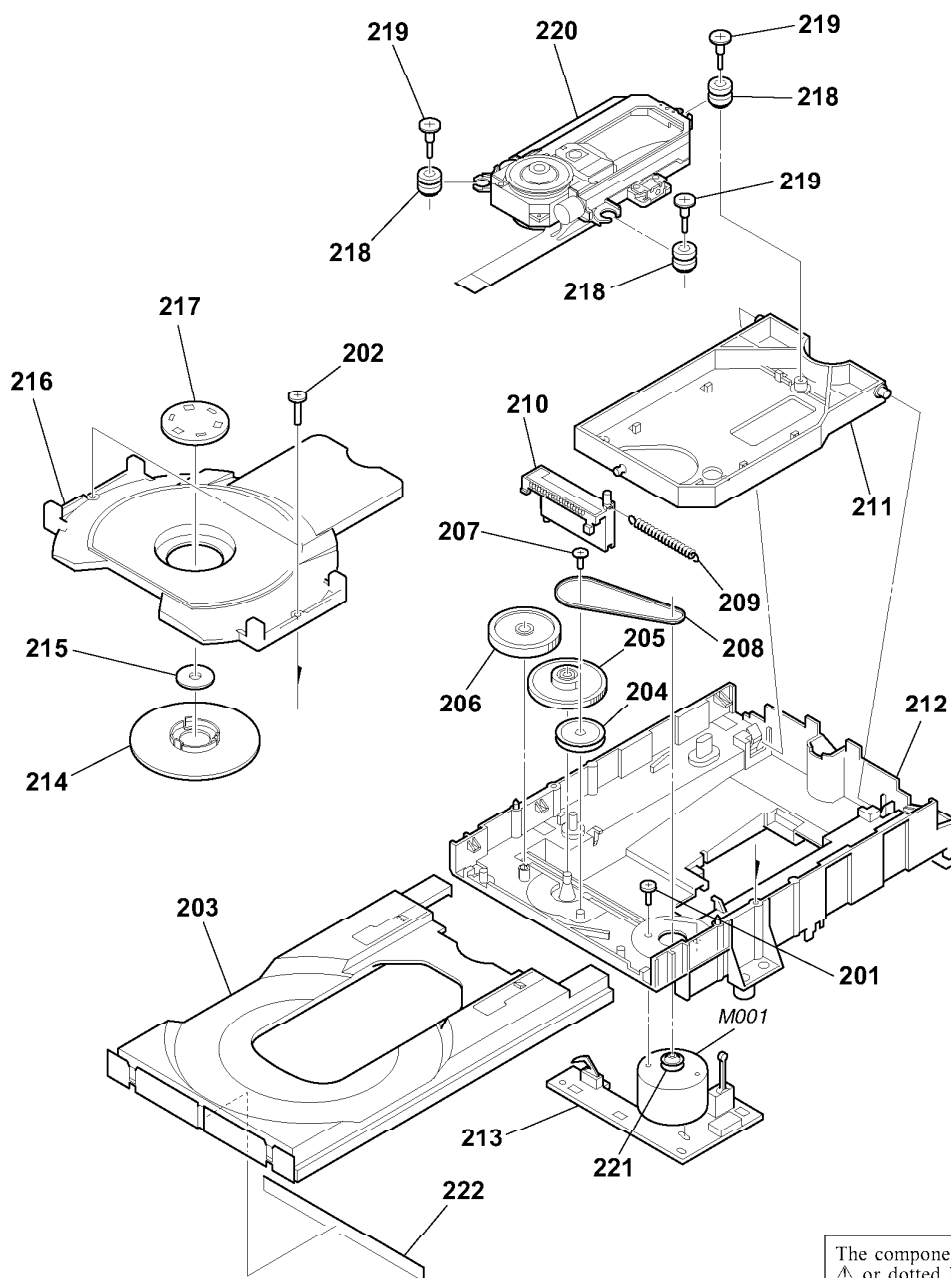

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
201	7-621-775-10	SCREW +B 2.6X4		* 213	A-6066-016-A	MS-48 BOARD, COMPLETE	
202	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3		214	3-053-845-01	CHUCK PLATE	
203	3-053-837-11	TRAY		215	3-053-844-01	YOKE	
204	3-053-841-01	PULLEY GEAR		216	3-059-558-11	HOLDER, CHUCK	
205	3-053-840-01	CAM DRIVING GEAR		217	3-053-846-01	YOKE HOLDER	
206	3-053-839-01	TRAY DRIVING GEAR		218	3-053-847-01	INSULATOR	
207	4-974-711-01	SCREW (2X5) (P TYIGHT), (+) PTTWH		219	4-981-923-01	SCREW (M), STEP	
208	3-053-842-01	BELT		Δ 220	A-6062-397-A	OPTICAL PICK-UP KHM-220AAA/J1RP	
209	3-053-849-01	SPRING, TENSION		221	3-053-843-01	MOTOR PULLEY	
210	3-053-838-01	CHUCK CAM		222	3-055-097-01	SEAL, TRAY DUST	
211	3-059-557-11	HOLDER, BASE UNIT		M001	1-541-632-11	MOTOR, DC (LOADING)	
212	3-059-556-11	BASE, LOADING					

8-2. ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable
- Not all of the parts for POWER BLOCK (HS16S9E) are listed.

- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- SEMICONDUCTORS
In each case, u: μ , for example:
uA. . . : μ A. . . uPA. . . : μ PA. . .
uPB. . . : μ PB. . . uPC. . . : μ PC. . .
uPD. . . : μ PD. . .
- CAPACITORS
uF: μ F
- COILS
uH: μ H
- Abbreviation
AUS : Australian
EA : Saudi Arabia
RU : Russian

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

When indicating parts by reference number, please include the board.

- Abbreviation
AUS : Australian
EA : Saudi Arabia
RU : Russian
- Description about destination (AEP model)
AEP₅₀
└ This number indicates the suffix number of its “model code”.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
*	A-6065-442-A	AI-17 BOARD, COMPLETE (S335: AEP, UK, RU/S336: AEP, UK)		C202	1-163-021-91	CERAMIC CHIP 0.01uF 10% 50V (S335/S336/S345)	
*	A-6065-453-A	AI-17 BOARD, COMPLETE (S535D)		C203	1-163-009-11	CERAMIC CHIP 0.001uF 10% 50V	
*	A-6065-463-A	AI-17 BOARD, COMPLETE (S335: E, EA/S336: AUS/S345)		C204	1-163-009-11	CERAMIC CHIP 0.001uF 10% 50V	
*	A-6065-477-A	AI-17 BOARD, COMPLETE (S735D: AEP, UK, RU)		C205	1-106-343-00	MYLAR 1000PF 5% 200V (S735D)	
*	A-6065-482-A	AI-17 BOARD, COMPLETE (S735D: E, EA, AUS) ***** (Ref.No. 2, 000 Series)		C206	1-106-343-00	MYLAR 1000PF 5% 200V (S735D)	
	3-059-329-01	HOLDER (T), FL		C207	1-107-737-11	MYLAR 560PF 5% 50V (S535D/S735D)	
	3-059-330-01	HOLDER (U), FL		C208	1-107-737-11	MYLAR 560PF 5% 50V (S535D/S735D)	
	< BUZZER >			C209	1-137-256-11	MYLAR 150PF 5% 50V (S535D/S735D)	
BZ401	1-504-920-11	BUZZER		C210	1-137-256-11	MYLAR 150PF 5% 50V (S535D/S735D)	
	< CAPACITOR >			C211	1-163-135-00	CERAMIC CHIP 560PF 5% 50V (S335/S336/S345)	
C110	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V		C212	1-130-472-00	MYLAR 0.0012uF 5% 50V (S735D)	
C114	1-104-664-11	ELECT 47uF 20% 25V		C213	1-104-664-11	ELECT 47uF 20% 16V (S335/S336/S345/S535D)	
C116	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V		C214	1-104-664-11	ELECT 47uF 20% 16V (S335/S336/S345/S535D)	
C119	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V		C215	1-128-200-11	ELECT 47uF 20% 63V (S735D)	
C120	1-115-340-11	CERAMIC CHIP 0.22uF 10% 25V		C216	1-128-200-11	ELECT 47uF 20% 63V (S735D)	
C121	1-104-665-11	ELECT 100uF 20% 25V		C217	1-106-351-00	MYLAR 2200PF 5% 200V (S735D)	
C122	1-110-501-11	CERAMIC CHIP 0.33uF 10% 16V		C217	1-106-353-00	MYLAR 0.0027uF 5% 50V (S535D)	
C123	1-124-589-11	ELECT 47uF 20% 16V		C217	1-130-478-00	MYLAR 0.0039uF 5% 50V (S335/S336/S345)	
C124	1-128-551-11	ELECT 22uF 20% 25V		C218	1-106-351-00	MYLAR 2200PF 5% 200V (S735D)	
C125	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V		C218	1-106-353-00	MYLAR 0.0027uF 5% 50V (S535D)	
C126	1-124-248-00	ELECT 22uF 20% 35V		C218	1-130-478-00	MYLAR 0.0039uF 5% 50V (S335/S336/S345)	
C127	1-128-551-11	ELECT 22uF 20% 25V		C219	1-163-021-91	CERAMIC CHIP 0.01uF 10% 50V	
C128	1-124-248-00	ELECT 22uF 20% 35V		C220	1-163-021-91	CERAMIC CHIP 0.01uF 10% 50V	
C129	1-124-248-00	ELECT 22uF 20% 35V		C221	1-126-052-11	ELECT 100uF 20% 16V (S735D)	
C160	1-124-234-00	ELECT 22uF 20% 16V (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)		C221	1-126-933-11	ELECT 100uF 20% 16V (S335/S336/S345/S535D)	
C162	1-163-017-00	CERAMIC CHIP 0.0047uF 5% 50V (S335: AEP, UK, RU/S336: AEP, UK/S535D)					
C162	1-163-021-91	CERAMIC CHIP 0.01uF 10% 50V (S735D: AEP, UK, RU)					
C163	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)					
C164	1-128-131-11	ELECT 22uF 20% 50V (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)					

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C222	1-126-052-11	ELECT	100uF	20%	16V (S735D)	C261	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)
C222	1-126-933-11	ELECT	100uF	20%	16V (S335/S336/S345/S535D)	C262	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)
C223	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	C263	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)
C224	1-163-251-11	CERAMIC CHIP	100PF	5%	50V (S335: E, EA/S336: AUS/S345/ S735D: E, EA, AUS)	C264	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)
C225	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	C265	1-126-176-11	ELECT	220uF	20%	10V (S535D/S735D)
C226	1-163-251-11	CERAMIC CHIP	100PF	5%	50V (S335: E, EA/S336: AUS/S345/ S735D: E, EA, AUS)	C266	1-126-176-11	ELECT	220uF	20%	10V (S535D/S735D)
C227	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S335/S336/S345)	C267	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S335/S336/S345)
C228	1-126-964-11	ELECT	10uF	20%	50V (S335/S336/S345)	C268	1-126-963-11	ELECT	4.7uF	20%	50V (S535D/S735D)
C229	1-107-823-11	CERAMIC CHIP	0.47uF	10%	16V	C269	1-124-261-00	ELECT	10uF	20%	50V (S535D/S735D)
C230	1-124-584-00	ELECT	100uF	20%	10V (S335/S336/S345/S535D)	C270	1-124-261-00	ELECT	10uF	20%	50V (S535D/S735D)
C230	1-128-200-11	ELECT	47uF	20%	63V (S735D)	C271	1-126-965-11	ELECT	22uF	20%	50V
C231	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S335/S336/S345/S535D)	C272	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C232	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S335/S336/S345/S535D)	C273	1-163-255-11	CERAMIC CHIP	150PF	5%	50V (S335/S336/S345)
C233	1-104-665-11	ELECT	100uF	20%	10V (S335/S336/S345/S535D)	C274	1-163-255-11	CERAMIC CHIP	150PF	5%	50V (S335/S336/S345)
C234	1-107-823-11	CERAMIC CHIP	0.47uF	10%	16V (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D)	C275	1-163-255-11	CERAMIC CHIP	150PF	5%	50V (S335/S336/S345)
C235	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S335/S336/S345)	C276	1-163-255-11	CERAMIC CHIP	150PF	5%	50V (S335/S336/S345)
C236	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	C277	1-163-135-00	CERAMIC CHIP	560PF	5%	50V (S335/S336/S345)
C237	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	C302	1-126-965-11	ELECT	22uF	20%	50V (S535D/S735D)
C238	1-128-202-11	ELECT	220uF	20%	63V (S735D)	C303	1-126-933-11	ELECT	100uF	20%	16V (S535D/S735D)
C239	1-126-960-11	ELECT	1uF	20%	50V	C304	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V (S735D)
C240	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S335/S336/S345)	C305	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V (S735D)
C241	1-126-960-11	ELECT	1uF	20%	50V	C306	1-126-960-11	ELECT	1uF	20%	50V (S735D)
C242	1-130-472-00	MYLAR	0.0012uF	5%	50V (S735D)	C307	1-115-340-11	CERAMIC CHIP	0.22uF	10%	25V (S535D/S735D)
C243	1-137-256-11	MYLAR	150PF	5%	50V (S535D/S735D)	C308	1-163-009-11	CERAMIC CHIP	0.001uF	10%	50V (S535D/S735D)
C244	1-137-256-11	MYLAR	150PF	5%	50V (S535D/S735D)	C309	1-126-965-11	ELECT	22uF	20%	50V (S535D/S735D)
C247	1-130-467-00	MYLAR	470PF	5%	50V (S735D)	C310	1-115-340-11	CERAMIC CHIP	0.22uF	10%	25V (S535D/S735D)
C248	1-130-467-00	MYLAR	470PF	5%	50V (S735D)	C311	1-107-823-11	CERAMIC CHIP	0.47uF	10%	16V
C252	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)	C312	1-137-605-11	MYLAR	0.00022uF	5%	50V (S535D/S735D)
C254	1-126-964-11	ELECT	10uF	20%	50V (S535D/S735D)	C313	1-137-605-11	MYLAR	0.00022uF	5%	50V (S535D/S735D)
C255	1-126-964-11	ELECT	10uF	20%	50V (S535D/S735D)	C314	1-163-255-11	CERAMIC CHIP	150PF	5%	50V (S535D/S735D)
C256	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	C315	1-163-255-11	CERAMIC CHIP	150PF	5%	50V (S535D/S735D)
C257	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	C316	1-137-256-11	MYLAR	150PF	5%	50V (S535D/S735D)
C258	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)	C317	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C259	1-109-982-11	CERAMIC CHIP	1uF	10%	10V (S335/S336/S345/S535D)	C318	1-130-470-00	MYLAR	820PF	5%	50V (S535D/S735D)
C260	1-128-200-11	ELECT	47uF	20%	63V (S735D)						

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C319	1-163-145-00	CERAMIC CHIP	0.0015uF	5%	50V (S535D/S735D)	C348	1-104-664-11	ELECT	47uF	20%	16V (S335/S336/S345/S535D)
C321	1-130-470-00	MYLAR	820PF	5%	50V (S535D/S735D)	C348	1-128-200-11	ELECT	47uF	20%	63V (S735D)
C322	1-163-145-00	CERAMIC CHIP	0.0015uF	5%	50V (S535D/S735D)	C349	1-104-664-11	ELECT	47uF	20%	16V
C323	1-106-343-00	MYLAR	1000PF	5%	200V (S535D/S735D)	C352	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)
C324	1-137-605-11	MYLAR	0.00022uF	5%	50V (S535D/S735D)	C353	1-126-935-11	ELECT	470uF	20%	6.3V (S335/S336/S345/S535D)
C325	1-163-255-11	CERAMIC CHIP	150PF	5%	50V (S535D/S735D)	C353	1-128-200-11	ELECT	47uF	20%	63V (S735D)
C326	1-163-133-00	CERAMIC CHIP	470PF	5%	50V	C354	1-128-197-11	ELECT	10uF	20%	50V (S735D)
C327	1-137-605-11	MYLAR	0.00022uF	5%	50V (S535D/S735D)	C356	1-128-197-11	ELECT	10uF	20%	50V (S735D)
C328	1-163-255-11	CERAMIC CHIP	150PF	5%	50V (S535D/S735D)	C357	1-126-964-11	ELECT	10uF	20%	50V (S335/S336/S345/S535D)
C329	1-137-256-11	MYLAR	150PF	5%	50V (S535D/S735D)	C357	1-128-200-11	ELECT	47uF	20%	63V (S735D)
C330	1-126-965-11	ELECT	22uF	20%	50V (S535D)	C368	1-126-964-11	ELECT	10uF	20%	50V (S335/S336/S345/S535D)
C330	1-128-198-11	ELECT	22uF	20%	50V (S735D)	C369	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C331	1-126-965-11	ELECT	22uF	20%	50V (S535D)	C370	1-126-965-11	ELECT	22uF	20%	50V (S535D/S735D)
C331	1-128-198-11	ELECT	22uF	20%	50V (S735D)	C371	1-115-340-11	CERAMIC CHIP	0.22uF	10%	25V (S535D/S735D)
C332	1-126-965-11	ELECT	22uF	20%	50V (S535D)	C381	1-104-664-11	ELECT	47uF	20%	16V (S335/S336/S345/S535D)
C332	1-128-198-11	ELECT	22uF	20%	50V (S735D)	C381	1-128-200-11	ELECT	47uF	20%	63V (S735D)
C333	1-126-965-11	ELECT	22uF	20%	50V (S535D)	C382	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V (S335/S336/S345/S535D)
C333	1-128-198-11	ELECT	22uF	20%	50V (S735D)	C383	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)
C334	1-126-965-11	ELECT	22uF	20%	50V (S535D)	C384	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)
C334	1-128-198-11	ELECT	22uF	20%	50V (S735D)	C385	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C335	1-126-965-11	ELECT	22uF	20%	50V (S335/S336/S345/S535D)	C386	1-164-182-11	CERAMIC CHIP	0.0033uF	10%	50V (S535D/S735D)
C335	1-128-198-11	ELECT	22uF	20%	50V (S735D)	C387	1-164-182-11	CERAMIC CHIP	0.0033uF	10%	50V (S535D/S735D)
C336	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S535D/S735D)	C388	1-164-182-11	CERAMIC CHIP	0.0033uF	10%	50V (S535D/S735D)
C337	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S535D/S735D)	C389	1-164-182-11	CERAMIC CHIP	0.0033uF	10%	50V (S535D/S735D)
C338	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S535D/S735D)	C390	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)
C339	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S535D/S735D)	C391	1-136-850-11	MYLAR	0.1uF	5%	63V (S735D)
C340	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	C392	1-119-774-11	ELECT	100uF	20%	16V
C341	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	C393	1-126-926-11	ELECT	1000uF	20%	10V (S535D/S735D)
C342	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	C393	1-126-934-11	ELECT	220uF	20%	16V (S335/S336/S345)
C343	1-137-605-11	MYLAR	0.00022uF	5%	50V (S535D/S735D)	C401	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S335/S336/S345)
C344	1-164-182-11	CERAMIC CHIP	0.0033uF	10%	50V (S535D/S735D)	C403	1-124-584-00	ELECT	100uF	20%	10V
C345	1-164-182-11	CERAMIC CHIP	0.0033uF	10%	50V (S535D/S735D)	C404	1-104-664-11	ELECT	47uF	20%	16V (S335/S336/S345/S535D)
C346	1-106-343-00	MYLAR	1000PF	5%	200V (S535D/S735D)	C405	1-124-234-00	ELECT	22uF	20%	16V
C347	1-106-343-00	MYLAR	1000PF	5%	200V (S535D/S735D)	C406	1-128-057-11	ELECT	330uF	20%	6.3V
						C407	1-104-664-11	ELECT	47uF	20%	16V (S335/S336/S345/S535D)
						C408	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V (S735D)

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C409	1-163-021-91	CERAMIC CHIP 0.01uF 10%	50V (S735D)	D161	8-719-041-97	DIODE MA113- (TX) (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)	
C410	1-163-021-91	CERAMIC CHIP 0.01uF 10%	50V	D162	8-719-041-97	DIODE MA113- (TX) (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)	
C411	1-104-665-11	ELECT 100uF 20%	10V	D163	8-719-041-97	DIODE MA113- (TX) (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)	
C413	1-163-021-91	CERAMIC CHIP 0.01uF 10%	50V	D164	8-719-421-21	DIODE MA8120-L-TX (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)	
C416	1-163-021-91	CERAMIC CHIP 0.01uF 10%	50V	D201	8-719-914-43	DIODE DAN202K-T-146 (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D)	
C417	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D202	8-719-914-43	DIODE DAN202K-T-146	
C418	1-115-339-11	CERAMIC CHIP 0.1uF 10%	50V	D203	8-719-914-43	DIODE DAN202K-T-146	
C419	1-115-339-11	CERAMIC CHIP 0.1uF 10%	50V	D205	8-719-988-61	DIODE 1SS355TE-17	
C420	1-128-131-11	ELECT 22uF 20%	50V	D302	8-719-914-43	DIODE DAN202K-T-146 (S535D/S735D)	
C421	1-104-664-11	ELECT 47uF 20%	16V (S335/S336/S345)	D303	8-719-988-61	DIODE 1SS355TE-17 (S335/S336/S345)	
C422	1-126-964-11	ELECT 10uF 20%	50V	D306	8-719-072-27	DIODE MA2Z748001S0	
C423	1-163-021-91	CERAMIC CHIP 0.01uF 10%	50V	D406	8-719-056-06	DIODE SLR-342DCT32 (JOG) (S735D)	
C426	1-163-021-91	CERAMIC CHIP 0.01uF 10%	50V	D407	8-719-041-97	DIODE MA113- (TX)	
C430	1-124-589-11	ELECT 47uF 20%	16V	D408	8-719-041-97	DIODE MA113- (TX)	
C431	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D409	8-719-041-97	DIODE MA113- (TX)	
C432	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D410	8-719-041-97	DIODE MA113- (TX)	
C433	1-109-982-11	CERAMIC CHIP 1uF 10%	10V	D411	8-719-988-61	DIODE 1SS355TE-17	
C434	1-109-982-11	CERAMIC CHIP 1uF 10%	10V	D412	8-719-056-06	DIODE SLR-342DCT32 (DVE) (S535D/S735D)	
C450	1-128-201-11	ELECT 100uF 20%	63V (S735D)	D413	8-719-056-06	DIODE SLR-342DCT32 (VES) (S335/S336/S345)	
C451	1-163-133-00	CERAMIC CHIP 470PF 5%	50V	D413	8-719-056-06	DIODE SLR-342DCT32 (VIRTUAL 3D SURROUND) (S535D/S735D)	
C490	1-163-259-91	CERAMIC CHIP 220PF 5%	50V	D415	8-719-422-62	DIODE MA8062-L-TX	
C491	1-163-259-91	CERAMIC CHIP 220PF 5%	50V	D416	8-719-914-44	DIODE DAP202K-T-146	
C492	1-163-259-91	CERAMIC CHIP 220PF 5%	50V	D417	8-719-069-54	DIODE UDZS-TE17-5.1B	
C493	1-128-201-11	ELECT 100uF 20%	63V (S735D)	D430	8-719-058-24	DIODE RB501V-40TE-17	
< CONNECTOR >				< EARTH TERMINAL >			
CN101	1-794-325-11	CONNECTOR, BOARD TO BOARD 34P		* ET401	1-537-738-21	TERMINAL, EARTH	
CN102	1-785-696-11	CONNECTOR, FFC/FPC 15P (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)		* ET402	1-537-738-21	TERMINAL, EARTH	
CN201	1-794-325-11	CONNECTOR, BOARD TO BOARD 34P		* ET403	1-537-738-21	TERMINAL, EARTH	
CN205	1-794-196-11	CONNECTOR, FFC/FPC 11P (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)		< FERRITE BEAD >			
CN401	1-778-317-21	CONNECTOR, BOARD TO BOARD 13P		FB101	1-414-766-22	INDUCTOR CHIP 0uH	
CN403	1-568-788-21	PIN, CONNECTOR 11P (S535D/S735D)		FB102	1-414-766-22	INDUCTOR CHIP 0uH	
* CN403	1-568-938-11	PIN, CONNECTOR 11P (S335/S336/S345)		FB103	1-414-766-22	INDUCTOR CHIP 0uH	
CN404	1-784-641-21	CONNECTOR, BOARD TO BOARD 11P (S535D/S735D)		FB104	1-414-766-22	INDUCTOR CHIP 0uH (S335: E, EA/S336: AUS/S345/ S735D: E, EA, AUS)	
CN405	1-785-694-11	CONNECTOR, FFC/FPC 7P (S335/S336/S345/S535D)		FB105	1-414-766-22	INDUCTOR CHIP 0uH (S335: E, EA/S336: AUS/S345/ S735D: E, EA, AUS)	
CN405	1-793-481-11	CONNECTOR, FFC/FPC 9P (S735D)		FB106	1-414-766-22	INDUCTOR CHIP 0uH (S335: E, EA/S336: AUS/S345/ S735D: E, EA, AUS)	
< DIODE >				FB107	1-414-766-22	INDUCTOR CHIP 0uH (S335: E, EA/S336: AUS/ S345/S735D)	
D101	8-719-914-44	DIODE DAP202K-T-146 (S335: AEP, UK, RU/S336: AEP, UK/S535D/ S735D: AEP, UK, RU)		FB108	1-414-766-22	INDUCTOR CHIP 0uH (S335: E, EA/S336: AUS/ S345/S735D)	
D103	8-719-071-15	DIODE HZM6.8ZWA1TL		FB109	1-414-766-22	INDUCTOR CHIP 0uH (S335: E, EA/ S336: AUS/S345/S735D)	
D104	8-719-071-15	DIODE HZM6.8ZWA1TL		FB201	1-414-230-22	INDUCTOR CHIP 0uH (S335/S336/S345/S535D)	
D105	8-719-071-15	DIODE HZM6.8ZWA1TL (S335: E, EA/S336: AUS/S345/ S735D: E, EA, AUS)					
D106	8-719-071-15	DIODE HZM6.8ZWA1TL (S335: E, EA/S336: AUS/S345/ S735D: E, EA, AUS)					
D160	8-719-041-97	DIODE MA113- (TX) (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)					

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
FB202	1-414-230-22	INDUCTOR CHIP 0uH (S335/S336/S345/S535D)		J102	1-793-475-21	JACK, PIN 2P (VIDEO OUT) (S335: E, EA/S336: AUS/S345)	
FB203	1-414-230-22	INDUCTOR CHIP 0uH		J103	1-794-198-11	CONNECTOR, S TERMINAL (S VIDEO OUT) (S335: AEP, UK, RU/S336: AEP, UK/S535D)	
FB204	1-414-230-22	INDUCTOR CHIP 0uH (S535D/S735D)		J103	1-794-198-21	CONNECTOR, S TERMINAL (S VIDEO OUT) (S735D: AEP, UK, RU)	
FB205	1-414-766-22	INDUCTOR CHIP 0uH (S335: E, EA/S336: AUS/S345/ S735D: E, EA, AUS)		J103	1-694-484-11	TERMINAL, S (2P.V) (S VIDEO OUT) (S735D: E, EA, AUS)	
FB206	1-414-766-22	INDUCTOR CHIP 0uH		J103	1-694-484-21	TERMINAL, S (2P.V) (S VIDEO OUT) (S335: E, EA/S336: AUS/S345)	
FB207	1-414-766-22	INDUCTOR CHIP 0uH (S335: E, EA/S336: AUS/S345/ S735D: E, EA, AUS)		J201	1-793-526-11	JACK, PIN 4P (AUDIO OUT) (S735D: E, EA, AUS)	
FB208	1-414-766-22	INDUCTOR CHIP 0uH		J201	1-793-526-21	JACK, PIN 4P (AUDIO OUT) (S335: E, EA/S336: AUS/S345)	
FB301	1-414-766-22	INDUCTOR CHIP 0uH (S335/S336/S345)		J202	1-793-525-11	JACK, PIN 2P (AUDIO OUT) (S735D: AEP, UK, RU)	
FB402	1-469-324-21	FERRITE 0uH		J202	1-793-525-21	JACK, PIN 2P (AUDIO OUT) (S335: AEP, UK, RU/S336: AEP, UK/S535D)	
FB405	1-469-324-21	FERRITE 0uH		J301	1-785-489-11	JACK, PIN 6P (5.1CH OUTPUT) (S735D)	
FB406	1-469-324-21	FERRITE 0uH		J301	1-785-536-11	JACK, PIN 6P (5.1CH OUTPUT) (S535D)	
FB407	1-469-324-21	FERRITE 0uH		J303	1-784-432-11	JACK, PIN 1P (COAXIAL) (S735D)	
FB409	1-469-324-21	FERRITE 0uH		J303	1-793-446-21	JACK, PIN 1P (COAXIAL) (S335/S336/S345/S535D)	
FB410	1-469-324-21	FERRITE 0uH		J304	1-793-446-11	JACK, PIN 1P (WOOFER) (S335/S336/S345)	
< IC >				< SHORT >			
IC101	8-759-667-63	IC LA7109-TLM		JR001	1-216-295-91	SHORT 0	
IC102	8-759-667-18	IC PQ018EZ01ZP		JR002	1-216-295-91	SHORT 0	
IC103	8-759-667-17	IC L79M05TLL-SONY-TL		JR003	1-216-296-91	SHORT 0	
IC201	8-759-669-29	IC CXD9544MR		JR004	1-216-296-91	SHORT 0	
IC203	8-759-587-83	IC OPA2134UA/2K5 (S735D)		JR005	1-216-296-91	SHORT 0	
IC204	8-759-377-65	IC LC78817M-TE-L (S335/S336/S345)		JR006	1-216-296-91	SHORT 0	
IC205	7-759-667-85	IC CXD9545Q (S335/S336/S345)		JR008	1-216-296-91	SHORT 0	
IC206	8-759-052-52	IC L78M05TLL-SONY-TL		JR009	1-216-296-91	SHORT 0 (S535D/S735D)	
IC207	8-759-369-74	IC NJM4556AM-TE2 (S535D)		JR010	1-216-296-91	SHORT 0	
IC207	8-759-909-71	IC BA4558F-E2 (S735D)		JR011	1-216-296-91	SHORT 0 (S535D/S735D)	
IC208	8-759-587-83	IC OPA2134UA/2K5 (S735D)		JR012	1-216-296-91	SHORT 0	
IC208	8-759-909-71	IC BA4558F-E2 (S335/S336/S345/S535D)		JR013	1-216-295-91	SHORT 0	
IC301	8-759-052-52	IC L78M05TLL-SONY-TL (S735D)		JR014	1-216-296-91	SHORT 0	
IC302	8-759-668-03	IC CXD9543Q (S535D/S735D)		JR015	1-216-295-91	SHORT 0 (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)	
IC303	8-759-587-83	IC OPA2134UA/2K5 (S735D)		JR016	1-216-296-91	SHORT 0	
IC303	8-759-909-71	IC BA4558F-E2 (S535D)		JR017	1-216-296-91	SHORT 0	
IC304	8-759-587-83	IC OPA2134UA/2K5 (S735D)		JR018	1-216-296-91	SHORT 0	
IC304	8-759-909-71	IC BA4558F-E2 (S535D)		JR019	1-216-295-91	SHORT 0	
IC305	8-759-587-83	IC OPA2134UA/2K5 (S735D)		JR020	1-216-296-91	SHORT 0 (S335/S336/S345/S535D)	
IC305	8-759-909-71	IC BA4558F-E2 (S335/S336/S345/S535D)		JR021	1-216-296-91	SHORT 0	
IC306	8-749-017-31	IC GP1FA550TZ (OPTICAL) (S335/S336/S345)		JR022	1-216-296-91	SHORT 0	
IC306	8-749-017-80	IC GP1FA551TZ (OPTICAL) (S535D/S735D)		JR023	1-216-295-91	SHORT 0	
IC307	8-759-667-19	IC uPC29M08T-E1		JR024	1-216-295-91	SHORT 0	
IC401	8-719-066-43	DIODE GP1U28Y (S335/S336/S345)		JR025	1-216-296-91	SHORT 0	
IC403	8-759-673-34	IC PST7030MT		JR026	1-216-296-91	SHORT 0	
IC404	8-759-669-95	IC M38B57M6-147FP		JR027	1-216-296-91	SHORT 0	
IC406	8-759-521-90	IC PQ05DZ5U		JR028	1-216-296-91	SHORT 0	
IC407	8-759-671-84	IC AN77033SP- (E1)		JR029	1-216-296-91	SHORT 0 (S335/S336/S345)	
< JACK >				JR030	1-216-296-91	SHORT 0	
J101	1-793-445-11	JACK, PIN 3P (COMPONENT VIDEO OUT) (S335: E, EA/S336: AUS/S345)		JR031	1-216-296-91	SHORT 0	
J101	1-793-445-21	JACK, PIN 3P (COMPONENT VIDEO OUT) (S735D)		JR032	1-216-295-91	SHORT 0	
J102	1-785-867-21	JACK, PIN 1P (VIDEO OUT) (S735D: AEP, UK, RU)		JR033	1-216-296-91	SHORT 0	
J102	1-785-867-31	JACK, PIN 1P (VIDEO OUT) (S335: AEP, UK, RU/S336: AEP, UK/S535D)		JR034	1-216-296-91	SHORT 0	
J102	1-793-475-11	JACK, PIN 2P (VIDEO OUT) (S735D: E, EA, AUS)		JR035	1-216-296-91	SHORT 0	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
JR036	1-216-295-91	SHORT	0	JR090	1-216-295-91	SHORT	0 (S335/S336/S345)
JR037	1-216-296-91	SHORT	0 (S335/S336/S345)	JR091	1-216-295-91	SHORT	0
JR038	1-216-296-91	SHORT	0			< COIL >	
JR039	1-216-296-91	SHORT	0	L160	1-408-978-21	INDUCATOR	47uH (S735D: AEP, UK, RU)
JR040	1-216-296-91	SHORT	0	L160	1-408-982-11	INDUCATOR	100uH
JR041	1-216-296-91	SHORT	0			(S335: AEP, UK, RU/S336: AEP, UK/S535D)	
JR042	1-216-296-91	SHORT	0	L401	1-408-978-21	INDUCATOR	47uH
JR043	1-216-295-91	SHORT	0	L402	1-408-978-21	INDUCATOR	47uH (S735D)
JR044	1-216-296-91	SHORT	0	L402	1-410-427-11	INDUCATOR	47uH (S535D)
JR045	1-216-296-91	SHORT	0			< FLUORESCENT INDICATOR TUBE >	
JR046	1-216-296-91	SHORT	0 (S535D/S735D)	ND401	1-517-971-11	INDICATOR TUBE, FLUORESCENT	
JR047	1-216-296-91	SHORT	0			(S335/S336/S345/S735D)	
JR048	1-216-296-91	SHORT	0	ND401	1-517-972-11	INDICATOR TUBE, FLUORESCENT (S535D)	
JR049	1-216-296-91	SHORT	0			< IC LINK >	
JR050	1-216-296-91	SHORT	0	△ PS401	1-532-679-00	LINK, IC (0.6A)	
JR051	1-216-295-91	SHORT	0 (S335/S336/S345/S535D)	△ PS402	1-532-605-00	LINK, IC (0.4A)	
JR052	1-216-296-91	SHORT	0			< TRANSISTOR >	
JR053	1-216-296-91	SHORT	0	Q106	8-729-421-19	TRANSISTOR	UN2213-TX
JR054	1-216-296-91	SHORT	0	Q107	8-729-424-08	TRANSISTOR	UN2111-TX
JR055	1-216-295-91	SHORT	0 (S535D/S735D)	Q160	8-729-808-42	TRANSISTOR	2SD1624-T-TD
JR056	1-216-295-91	SHORT	0 (S535D/S735D)			(S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)	
JR057	1-216-295-91	SHORT	0	Q161	8-729-808-42	TRANSISTOR	2SD1624-T-TD
JR058	1-216-295-91	SHORT	0			(S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)	
JR059	1-216-296-91	SHORT	0	Q162	8-729-808-42	TRANSISTOR	2SD1624-T-TD
JR060	1-216-296-91	SHORT	0			(S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)	
JR061	1-216-295-91	SHORT	0	Q201	8-729-046-97	TRANSISTOR	2SD1938 (F)-T (TX).SO
JR062	1-216-295-91	SHORT	0			(S735D)	
JR063	1-216-296-91	SHORT	0	Q202	8-729-046-97	TRANSISTOR	2SD1938 (F)-T (TX).SO
JR064	1-216-296-91	SHORT	0			(S735D)	
JR065	1-216-296-91	SHORT	0	Q203	8-729-023-22	TRANSISTOR	2SD2114KT146
JR066	1-216-296-91	SHORT	0			(S335/S336/S345)	
JR067	1-216-296-91	SHORT	0	Q203	8-729-046-97	TRANSISTOR	2SD1938 (F)-T (TX).SO
JR068	1-216-296-91	SHORT	0			(S535D/S735D)	
JR069	1-216-296-91	SHORT	0	Q204	8-729-023-22	TRANSISTOR	2SD2114KT146
JR070	1-216-296-91	SHORT	0			(S335/S336/S345)	
JR071	1-216-295-91	SHORT	0	Q204	8-729-046-97	TRANSISTOR	2SD1938 (F)-T (TX).SO
JR072	1-216-296-91	SHORT	0			(S535D/S735D)	
JR073	1-216-295-91	SHORT	0	Q205	8-729-421-19	TRANSISTOR	UN2213-TX
		(S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)		Q206	8-729-027-53	TRANSISTOR	DTC124TKA-T146
JR074	1-216-296-91	SHORT	0	Q207	8-729-216-22	TRANSISTOR	2SB709A-QRS-TX
JR075	1-216-295-91	SHORT	0	Q208	8-729-230-49	TRANSISTOR	2SC2712-YG-TE85L
JR076	1-216-295-91	SHORT	0			(S535D/S735D)	
JR077	1-216-296-91	SHORT	0	Q209	8-729-421-19	TRANSISTOR	UN2213-TX (S535D/S735D)
JR078	1-216-296-91	SHORT	0	Q210	8-729-424-18	TRANSISTOR	UN2113-TX (S735D)
JR079	1-216-296-91	SHORT	0 (S535D/S735D)	Q211	8-729-027-53	TRANSISTOR	DTC124TKA-T146
JR080	1-216-295-91	SHORT	0			(S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D)	
JR081	1-216-296-91	SHORT	0	Q212	8-729-216-22	TRANSISTOR	2SB709A-QRS-TX
		(S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)				(S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D)	
JR082	1-216-296-91	SHORT	0 (S335/S336/S345)	Q213	8-729-046-97	TRANSISTOR	2SD1938 (F)-T (TX).SO
JR083	1-216-296-91	SHORT	0			(S535D/S735D)	
JR084	1-216-296-91	SHORT	0 (S535D/S735D)	Q214	8-729-046-97	TRANSISTOR	2SD1938 (F)-T (TX).SO
JR085	1-216-296-91	SHORT	0			(S535D/S735D)	
JR086	1-216-295-91	SHORT	0				
JR087	1-216-295-91	SHORT	0				
JR088	1-216-296-91	SHORT	0				
JR089	1-216-296-91	SHORT	0				

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remark
Q215	8-729-424-18	TRANSISTOR UN2113-TX (S535D/S735D)	
Q220	8-729-046-97	TRANSISTOR 2SD1938 (F)-T (TX).SO (S535D/S735D)	
Q221	8-729-046-97	TRANSISTOR 2SD1938 (F)-T (TX).SO (S535D/S735D)	
Q301	8-729-421-19	TRANSISTOR UN2213-TX (S535D/S735D)	
Q302	8-729-027-53	TRANSISTOR DTC124TKA-T146	
Q303	8-729-216-22	TRANSISTOR 2SB709A-QRS-TX	
Q304	8-729-023-22	TRANSISTOR 2SD2114KT146 (S335/S336/S345)	
Q304	8-729-046-97	TRANSISTOR 2SD1938 (F)-T (TX).SO (S535D/S735D)	
Q305	8-729-046-97	TRANSISTOR 2SD1938 (F)-T (TX).SO (S535D/S735D)	
Q306	8-729-046-97	TRANSISTOR 2SD1938 (F)-T (TX).SO (S535D/S735D)	
Q307	8-729-046-97	TRANSISTOR 2SD1938 (F)-T (TX).SO (S535D/S735D)	
Q308	8-729-046-97	TRANSISTOR 2SD1938 (F)-T (TX).SO (S535D/S735D)	
Q309	8-729-046-97	TRANSISTOR 2SD1938 (F)-T (TX).SO (S535D/S735D)	
Q311	8-729-230-72	TRANSISTOR 2SA1362-YG-EL	
Q312	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L (S735D)	
Q313	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q314	8-729-216-22	TRANSISTOR 2SA1162-YG-TE85L (S735D)	
Q401	8-729-808-42	TRANSISTOR 2SD1624-T-TD	
Q402	8-729-808-42	TRANSISTOR 2SD1624-T-TD	
< RESISTOR >			
R101	1-216-296-91	SHORT 0	
R109	1-216-073-00	METAL CHIP 10K 5% 1/10W	
R110	1-216-073-00	METAL CHIP 10K 5% 1/10W	
R111	1-216-021-00	METAL CHIP 68 5% 1/10W (S335: E, EA/S336: AUS/S345/S735D)	
R112	1-216-021-00	METAL CHIP 68 5% 1/10W (S335: E, EA/S336: AUS/S345/S735D)	
R113	1-216-021-00	METAL CHIP 68 5% 1/10W (S335: E, EA/S336: AUS/S345/S735D)	
R114	1-216-021-00	METAL CHIP 68 5% 1/10W (S335: E, EA/S336: AUS/S345/S735D: E, EA, AUS)	
R114	1-216-295-91	SHORT 0 (S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU)	
R115	1-216-021-00	METAL CHIP 68 5% 1/10W	
R116	1-216-021-00	METAL CHIP 68 5% 1/10W	
R117	1-216-021-00	METAL CHIP 68 5% 1/10W	
R118	1-216-021-00	METAL CHIP 68 5% 1/10W	
R119	1-216-021-00	METAL CHIP 68 5% 1/10W	
R122	1-216-295-91	SHORT 0 (S335: E, EA/S336: AUS/S345/S735D: E, EA, AUS)	
R126	1-216-295-91	SHORT 0	
R127	1-216-295-91	SHORT 0	
R128	1-216-295-91	SHORT 0	
R145	1-216-073-00	METAL CHIP 10K 5% 1/10W (S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU)	
R147	1-216-089-91	RES, CHIP 47K 5% 1/10W	
R148	1-216-089-91	RES, CHIP 47K 5% 1/10W	
R149	1-216-089-91	RES, CHIP 47K 5% 1/10W	
R150	1-216-089-91	RES, CHIP 47K 5% 1/10W	
R151	1-216-089-91	RES, CHIP 47K 5% 1/10W	

Ref. No.	Part No.	Description	Remark
R152	1-216-089-91	RES, CHIP 47K 5% 1/10W	
R165	1-216-063-91	RES, CHIP 3.9K 5% 1/10W (S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU)	
R166	1-216-061-00	METAL CHIP 3.3K 5% 1/10W (S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU)	
R167	1-216-073-00	METAL CHIP 10K 5% 1/10W (S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D: AEP, UK, RU)	
R201	1-216-295-91	SHORT 0 (S335/S336/S345)	
R204	1-216-025-91	RES, CHIP 100 5% 1/10W	
R205	1-216-033-00	METAL CHIP 220 5% 1/10W	
R206	1-216-033-00	METAL CHIP 220 5% 1/10W	
R210	1-216-295-91	SHORT 0	
R211	1-216-295-91	SHORT 0 (S535D/S735D)	
R212	1-216-041-00	METAL CHIP 470 5% 1/10W (S735D)	
R213	1-216-065-91	RES, CHIP 4.7K 5% 1/10W	
R229	1-216-673-11	METAL CHIP 8.2K 0.5% 1/10W	
R230	1-208-806-11	RES, CHIP 10K 2% 1/10W	
R231	1-216-053-00	METAL CHIP 1.5K 5% 1/10W	
R232	1-208-806-11	RES, CHIP 10K 2% 1/10W	
R233	1-216-053-00	METAL CHIP 1.5K 5% 1/10W	
R234	1-216-673-11	METAL CHIP 8.2K 0.5% 1/10W	
R235	1-208-806-11	RES, CHIP 10K 2% 1/10W	
R236	1-216-053-00	METAL CHIP 1.5K 5% 1/10W	
R237	1-216-053-00	METAL CHIP 1.5K 5% 1/10W	
R238	1-208-806-11	RES, CHIP 10K 2% 1/10W	
R239	1-216-055-00	METAL CHIP 1.8K 5% 1/10W (S735D)	
R240	1-216-055-00	METAL CHIP 1.8K 5% 1/10W (S735D)	
R241	1-216-055-00	METAL CHIP 1.8K 5% 1/10W (S735D)	
R242	1-216-055-00	METAL CHIP 1.8K 5% 1/10W (S735D)	
R243	1-216-041-00	METAL CHIP 470 5% 1/10W	
R244	1-216-041-00	METAL CHIP 470 5% 1/10W	
R245	1-216-089-91	RES, CHIP 47K 5% 1/10W	
R246	1-216-089-91	RES, CHIP 47K 5% 1/10W	
R247	1-216-065-91	RES, CHIP 4.7K 5% 1/10W	
R248	1-216-065-91	RES, CHIP 4.7K 5% 1/10W (S335: E, EA/S336: AUS/S345)	
R251	1-216-097-91	RES, CHIP 100K 5% 1/10W	
R252	1-216-041-00	METAL CHIP 470 5% 1/10W (S335: E, EA/S336: AUS/S345/S735D: E, EA, AUS)	
R253	1-216-041-00	METAL CHIP 470 5% 1/10W	
R254	1-216-041-00	METAL CHIP 470 5% 1/10W (S335: E, EA/S336: AUS/S345/S735D: E, EA, AUS)	
R255	1-216-041-00	METAL CHIP 470 5% 1/10W	
R256	1-216-073-00	METAL CHIP 10K 5% 1/10W	
R257	1-216-073-00	METAL CHIP 10K 5% 1/10W	
R258	1-216-073-00	METAL CHIP 10K 5% 1/10W	
R259	1-216-073-00	METAL CHIP 10K 5% 1/10W (S335: AEP, UK, RU/S336: AEP, UK/S535D/S735D)	
R260	1-216-673-11	METAL CHIP 8.2K 0.5% 1/10W	
R263	1-216-085-00	METAL CHIP 33K 5% 1/10W (S535D/S735D)	

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R264	1-216-085-00	METAL CHIP	33K	5%	1/10W (S535D/S735D)	R307	1-216-089-91	RES, CHIP	47K	5%	1/10W
R266	1-216-295-91	SHORT	0	(S535D/S735D)	R311	1-216-089-91	RES, CHIP	47K	5%	1/10W (S535D/S735D)	
R267	1-216-051-00	METAL CHIP	1.2K	5%	1/10W (S535D/S735D)	R312	1-216-001-00	METAL CHIP	10	5%	1/10W (S535D/S735D)
R268	1-216-073-00	METAL CHIP	10K	5%	1/10W (S535D/S735D)	R313	1-216-089-91	RES, CHIP	47K	5%	1/10W (S535D/S735D)
R269	1-216-085-00	METAL CHIP	33K	5%	1/10W (S535D/S735D)	R314	1-216-001-00	METAL CHIP	10	5%	1/10W (S535D/S735D)
R270	1-216-065-91	RES, CHIP	4.7K	5%	1/10W	R316	1-216-073-00	METAL CHIP	10K	5%	1/10W (S535D/S735D)
R271	1-216-673-11	METAL CHIP	8.2K	0.5%	1/10W						
R276	1-216-085-00	METAL CHIP	33K	5%	1/10W (S535D/S735D)						
R277	1-216-097-91	RES, CHIP	100K	5%	1/10W (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D)	R318	1-216-073-00	METAL CHIP	10K	5%	1/10W (S535D/S735D)
R278	1-216-065-91	RES, CHIP	4.7K	5%	1/10W (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D)	R321	1-216-295-91	SHORT	0	(S335/S336/S345/S535D)	
						R323	1-216-073-00	METAL CHIP	10K	5%	1/10W (S535D/S735D)
R279	1-216-009-91	RES, CHIP	22	5%	1/10W (EXCEPT S735D)	R324	1-216-073-00	METAL CHIP	10K	5%	1/10W
R279	1-216-295-91	SHORT	0	(S735D)	R325	1-216-073-00	METAL CHIP	10K	5%	1/10W	
R280	1-216-073-00	METAL CHIP	10K	5%	1/10W (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D)	R326	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S535D/S735D)
R281	1-216-089-91	RES, CHIP	47K	5%	1/10W	R327	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S535D/S735D)
R282	1-216-085-00	METAL CHIP	33K	5%	1/10W (S535D/S735D)	R328	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S535D/S735D)
R283	1-216-097-91	RES, CHIP	100K	5%	1/10W (S535D/S735D)	R329	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S535D/S735D)
						R330	1-216-063-91	RES, CHIP	3.9K	5%	1/10W (S535D/S735D)
R284	1-216-073-00	METAL CHIP	10K	5%	1/10W (S535D)	R331	1-216-063-91	RES, CHIP	3.9K	5%	1/10W (S535D/S735D)
R284	1-216-077-91	RES, CHIP	15K	5%	1/10W (S735D)	R332	1-216-063-91	RES, CHIP	3.9K	5%	1/10W (S535D/S735D)
R285	1-216-085-00	METAL CHIP	33K	5%	1/10W (S535D/S735D)	R333	1-216-063-91	RES, CHIP	3.9K	5%	1/10W (S535D/S735D)
R286	1-216-025-91	RES, CHIP	100	5%	1/10W (S535D)	R334	1-216-051-00	METAL CHIP	1.2K	5%	1/10W (S535D/S735D)
R286	1-216-033-00	METAL CHIP	220	5%	1/10W (S735D)	R335	1-216-051-00	METAL CHIP	1.2K	5%	1/10W (S535D/S735D)
						R336	1-216-049-91	RES, CHIP	1K	5%	1/10W (S535D/S735D)
R287	1-216-085-00	METAL CHIP	33K	5%	1/10W (S535D/S735D)	R336	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S335/S336/S345)
R288	1-216-097-91	RES, CHIP	100K	5%	1/10W (S535D/S735D)	R337	1-216-049-91	RES, CHIP	1K	5%	1/10W (S535D/S735D)
R289	1-216-073-00	METAL CHIP	10K	5%	1/10W (S535D)	R337	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S335/S336/S345)
R289	1-216-077-91	RES, CHIP	15K	5%	1/10W (S735D)	R338	1-216-063-91	RES, CHIP	3.9K	5%	1/10W (S535D/S735D)
R290	1-216-085-00	METAL CHIP	33K	5%	1/10W (S535D/S735D)						
R291	1-216-025-91	RES, CHIP	100	5%	1/10W (S535D)	R339	1-216-075-00	METAL CHIP	12K	5%	1/10W (S535D/S735D)
R291	1-216-033-00	METAL CHIP	220	5%	1/10W (S735D)	R340	1-216-075-00	METAL CHIP	12K	5%	1/10W
R295	1-216-295-91	SHORT	0	(S535D/S735D)	R341	1-216-063-91	RES, CHIP	3.9K	5%	1/10W (S535D/S735D)	
R297	1-216-097-91	RES, CHIP	100K	5%	1/10W (S535D/S735D)	R342	1-216-075-00	METAL CHIP	12K	5%	1/10W (S535D/S735D)
R301	1-216-049-91	RES, CHIP	1K	5%	1/10W (S335/S336/S345/S535D)	R343	1-216-075-00	METAL CHIP	12K	5%	1/10W (S535D/S735D)
						R343	1-216-295-91	SHORT	0	(S335/S336/S345)	
R302	1-216-295-91	SHORT	0	(S535D/S735D)	R344	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)	
R303	1-216-089-91	RES, CHIP	47K	5%	1/10W	R345	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)
R304	1-216-025-91	RES, CHIP	100	5%	1/10W (S535D/S735D)						
R306	1-216-089-91	RES, CHIP	47K	5%	1/10W (S535D/S735D)	R347	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R348	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)	R389	1-216-049-91	RES, CHIP	1K	5%	1/10W (S735D)
R349	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)	R391	1-216-025-91	RES, CHIP	100	5%	1/10W
R350	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)	R392	1-216-021-00	METAL CHIP	68	5%	1/10W
R351	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)	R393	1-216-021-00	METAL CHIP	68	5%	1/10W (S735D)
R351	1-216-295-91	SHORT	0	(S335/S336/S345)		R394	1-216-033-00	METAL CHIP	220	5%	1/10W (S335/S336/S345/S535D)
R353	1-216-061-00	METAL CHIP	3.3K	5%	1/10W	R395	1-216-051-00	METAL CHIP	1.2K	5%	1/10W (S535D/S735D)
R354	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)	R396	1-216-051-00	METAL CHIP	1.2K	5%	1/10W (S535D/S735D)
R355	1-216-063-91	RES, CHIP	3.9K	5%	1/10W (S535D/S735D)	R401	1-216-017-91	RES, CHIP	47	5%	1/10W (S335/S336/S345)
R356	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)	R402	1-216-101-00	METAL CHIP	150K	5%	1/10W (S335/S336/S345)
R357	1-216-075-00	METAL CHIP	12K	5%	1/10W (S535D/S735D)	R403	1-216-089-91	RES, CHIP	47K	5%	1/10W (S335/S336/S345)
R358	1-216-055-00	METAL CHIP	1.8K	5%	1/10W (S535D/S735D)	R405	1-216-295-91	SHORT	0		
R358	1-216-295-91	SHORT	0	(S335/S336/S345)		R407	1-216-059-00	METAL CHIP	2.7K	5%	1/10W
R359	1-216-075-00	METAL CHIP	12K	5%	1/10W	R408	1-216-081-00	METAL CHIP	22K	5%	1/10W (S735D)
R360	1-216-063-91	RES, CHIP	3.9K	5%	1/10W (S535D/S735D)	R409	1-216-295-91	SHORT	0		
R361	1-216-075-00	METAL CHIP	12K	5%	1/10W (S535D/S735D)	R410	1-216-071-00	METAL CHIP	8.2K	5%	1/10W
						R411	1-216-071-00	METAL CHIP	8.2K	5%	1/10W
						R412	1-216-295-91	SHORT	0		
R362	1-216-075-00	METAL CHIP	12K	5%	1/10W (S535D/S735D)	R413	1-216-013-00	METAL CHIP	33	5%	1/10W
R362	1-216-295-91	SHORT	0	(S335/S336/S345)		R414	1-216-025-91	RES, CHIP	100	5%	1/10W
R363	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S535D/S735D)	R415	1-216-295-91	SHORT	0		
R364	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S535D/S735D)	R416	1-216-041-00	METAL CHIP	470	5%	1/10W
R365	1-216-089-91	RES, CHIP	47K	5%	1/10W (S535D/S735D)	R417	1-216-025-91	RES, CHIP	100	5%	1/10W
R366	1-216-089-91	RES, CHIP	47K	5%	1/10W (S535D/S735D)	R418	1-216-073-00	METAL CHIP	10K	5%	1/10W
R371	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S535D/S735D)	R420	1-216-063-91	RES, CHIP	3.9K	5%	1/10W
R372	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S535D/S735D)	R421	1-216-063-91	RES, CHIP	3.9K	5%	1/10W
R373	1-216-097-91	RES, CHIP	100K	5%	1/10W	R422	1-216-073-00	METAL CHIP	10K	5%	1/10W (S735D)
R374	1-216-061-00	METAL CHIP	3.3K	5%	1/10W (S535D/S735D)	R423	1-216-073-00	METAL CHIP	10K	5%	1/10W (S735D)
R375	1-216-041-00	METAL CHIP	470	5%	1/10W	R424	1-216-063-91	RES, CHIP	3.9K	5%	1/10W
R376	1-216-041-00	METAL CHIP	470	5%	1/10W (S535D/S735D)	R426	1-216-059-00	METAL CHIP	2.7K	5%	1/10W
R377	1-216-041-00	METAL CHIP	470	5%	1/10W (S535D/S735D)	R427	1-216-059-00	METAL CHIP	2.7K	5%	1/10W
R378	1-216-041-00	METAL CHIP	470	5%	1/10W (S535D/S735D)	R428	1-216-025-91	RES, CHIP	100	5%	1/10W (S735D)
R379	1-216-041-00	METAL CHIP	470	5%	1/10W (S535D/S735D)	R429	1-216-025-91	RES, CHIP	100	5%	1/10W (S735D)
R380	1-216-041-00	METAL CHIP	470	5%	1/10W (S535D/S735D)	R432	1-216-073-00	METAL CHIP	10K	5%	1/10W
R381	1-216-049-91	RES, CHIP	1K	5%	1/10W	R434	1-216-073-00	METAL CHIP	10K	5%	1/10W
R382	1-216-295-91	SHORT	0			R435	1-216-073-00	METAL CHIP	10K	5%	1/10W
R384	1-216-057-00	METAL CHIP	2.2K	5%	1/10W	R436	1-216-295-91	SHORT	0		
R385	1-216-033-00	METAL CHIP	220	5%	1/10W	R438	1-216-295-91	SHORT	0		
R386	1-216-049-91	RES, CHIP	1K	5%	1/10W	R439	1-216-015-00	METAL CHIP	39	5%	1/10W
R387	1-216-081-00	METAL CHIP	22K	5%	1/10W (S735D)	R443	1-216-027-00	METAL CHIP	120	5%	1/10W (S735D)
R388	1-216-073-00	METAL CHIP	10K	5%	1/10W (S735D)	R444	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
						R449	1-216-025-91	RES, CHIP	100	5%	1/10W
						R450	1-216-097-91	RES, CHIP	100K	5%	1/10W
						R451	1-216-073-00	METAL CHIP	10K	5%	1/10W
						R452	1-216-073-00	METAL CHIP	10K	5%	1/10W
						R453	1-216-073-00	METAL CHIP	10K	5%	1/10W
						R454	1-216-073-00	METAL CHIP	10K	5%	1/10W
						R455	1-216-073-00	METAL CHIP	10K	5%	1/10W
						R456	1-216-073-00	METAL CHIP	10K	5%	1/10W

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R457	1-216-073-00	METAL CHIP	10K	5%	1/10W	R579	1-216-049-91	RES, CHIP	1K	5%	1/10W
R458	1-216-073-00	METAL CHIP	10K	5%	1/10W						(S535D/S735D)
R459	1-216-025-91	RES, CHIP	100	5%	1/10W	R580	1-216-049-91	RES, CHIP	1K	5%	1/10W
R460	1-216-025-91	RES, CHIP	100	5%	1/10W						(S535D/S735D)
R461	1-216-025-91	RES, CHIP	100	5%	1/10W	R582	1-414-766-22	INDUCTOR CHIP	0uH	(S535D/S735D)	
R462	1-216-025-91	RES, CHIP	100	5%	1/10W	R583	1-414-766-22	INDUCTOR CHIP	0uH	(S535D/S735D)	
R463	1-216-025-91	RES, CHIP	100	5%	1/10W	R584	1-414-766-22	INDUCTOR CHIP	0uH	(S535D/S735D)	
R464	1-216-025-91	RES, CHIP	100	5%	1/10W	R585	1-414-766-22	INDUCTOR CHIP	0uH	(S535D/S735D)	
R465	1-216-073-00	METAL CHIP	10K	5%	1/10W	R586	1-414-766-22	INDUCTOR CHIP	0uH	(S535D/S735D)	
R466	1-216-073-00	METAL CHIP	10K	5%	1/10W	R587	1-414-766-22	INDUCTOR CHIP	0uH	(S535D/S735D)	
R469	1-216-073-00	METAL CHIP	10K	5%	1/10W	R606	1-216-295-91	SHORT	0		
R470	1-216-065-91	RES, CHIP	4.7K	5%	1/10W	R607	1-216-295-91	SHORT	0		
R472	1-216-033-00	METAL CHIP	220	5%	1/10W	R608	1-216-295-91	SHORT	0		
						R611	1-216-295-91	SHORT	0	(S335/S336/S345)	
R473	1-216-033-00	METAL CHIP	220	5%	1/10W	R612	1-216-295-91	SHORT	0	(S535D)	
						R613	1-216-295-91	SHORT	0	(S735D)	
R473	1-216-037-00	METAL CHIP	330	5%	1/10W	R615	1-216-295-91	SHORT	0		
										(S335: E, EA/S336: AUS/S345/	
R475	1-216-073-00	METAL CHIP	10K	5%	1/10W					S535D/S735D: AEP, UK, RU)	
R476	1-216-295-91	SHORT	0	(S335/S336/S345)		R616	1-216-295-91	SHORT	0	(S735D: E, EA, AUS)	
R477	1-216-295-91	SHORT	0			R617	1-216-295-91	SHORT	0		
R478	1-216-073-00	METAL CHIP	10K	5%	1/10W					(S335: AEP, UK, RU/S336: AEP, UK)	
R479	1-216-073-00	METAL CHIP	10K	5%	1/10W			< SWITCH >			
R480	1-216-073-00	METAL CHIP	10K	5%	1/10W	S401	1-771-574-21	SWITCH, TACTILE (DVE)	(S535D/S735D)		
R481	1-216-073-00	METAL CHIP	10K	5%	1/10W	S402	1-771-574-21	SWITCH, TACTILE (JOG)	(S735D)		
R482	1-216-073-00	METAL CHIP	10K	5%	1/10W	S403	1-771-574-21	SWITCH, TACTILE (VES)	(S335/S336/S345)		
						S403	1-771-574-21	SWITCH, TACTILE (VIRTUAL 3D SURROUND)			
R483	1-216-073-00	METAL CHIP	10K	5%	1/10W					(S535D/S735D)	
R484	1-216-073-00	METAL CHIP	10K	5%	1/10W	S404	1-771-574-21	SWITCH, TACTILE (PREV ◀◀)	(S535D)		
R485	1-216-049-91	RES, CHIP	1K	5%	1/10W	S405	1-771-574-21	SWITCH, TACTILE (RETURN)			
R487	1-216-027-00	METAL CHIP	120	5%	1/10W	S407	1-771-574-21	SWITCH, TACTILE (NEXT ▶▶)	(S535D)		
R489	1-216-073-00	METAL CHIP	10K	5%	1/10W	S408	1-771-574-21	SWITCH, TACTILE (DISPLAY)			
R490	1-216-059-00	METAL CHIP	2.7K	5%	1/10W	S410	1-771-574-21	SWITCH, TACTILE (DVD MENU)			
R491	1-216-063-91	RES, CHIP	3.9K	5%	1/10W	S411	1-771-574-21	SWITCH, TACTILE (■)			
R492	1-216-071-00	METAL CHIP	8.2K	5%	1/10W	S413	1-771-574-21	SWITCH, TACTILE (TITLE)			
R493	1-216-081-00	METAL CHIP	22K	5%	1/10W	S414	1-771-574-21	SWITCH, TACTILE (■)			
R494	1-216-093-91	RES, CHIP	68K	5%	1/10W	S415	1-771-574-21	SWITCH, TACTILE (▷)			
R495	1-216-093-91	RES, CHIP	68K	5%	1/10W	S416	1-771-574-21	SWITCH, TACTILE (OPEN/CLOSE ≡)	(S535D)		
R496	1-216-093-91	RES, CHIP	68K	5%	1/10W	S417	1-771-574-21	SWITCH, TACTILE (OPEN/CLOSE ≡)			
										(S335/S336/S345/S735D)	
R497	1-216-093-91	RES, CHIP	68K	5%	1/10W	S418	1-771-574-21	SWITCH, TACTILE (PREV ◀◀)			
R498	1-216-093-91	RES, CHIP	68K	5%	1/10W					(S335/S336/S345/S735D)	
R499	1-216-093-91	RES, CHIP	68K	5%	1/10W	S419	1-771-574-21	SWITCH, TACTILE (NEXT ▶▶)			
										(S335/S336/S345/S735D)	
R557	1-216-295-91	SHORT	0	(S335/S336/S345)							
R569	1-216-089-91	RES, CHIP	47K	5%	1/10W			< TRANSFORMER >			
R571	1-216-097-91	RES, CHIP	100K	5%	1/10W	T160	1-435-411-11	TRANSFORMER, DC-DC CONVERTER			
										(S335: AEP, UK, RU/S336: AEP, UK/	
R572	1-216-065-91	RES, CHIP	4.7K	5%	1/10W					S535D/S735D: AEP, UK, RU)	
						T401	1-435-411-11	TRANSFORMER, DC-DC CONVERTER			
										< VIBRATOR >	
R573	1-216-051-00	METAL CHIP	1.2K	5%	1/10W	X401	1-781-853-21	VIBRATOR, CERAMIC (2MHz)			
R574	1-216-051-00	METAL CHIP	1.2K	5%	1/10W						
R575	1-216-051-00	METAL CHIP	1.2K	5%	1/10W						
R576	1-216-051-00	METAL CHIP	1.2K	5%	1/10W						

Ref. No.	Part No.	Description	Remark		
*	A-6065-444-A	ER-9 BOARD, COMPLETE (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU) ***** (Ref.No. 2,000 Series)			
< CAPACITOR >					
C902	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C906	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C907	1-126-204-11	ELECT CHIP	47uF	20%	16V
C908	1-126-395-11	ELECT CHIP	22uF	20%	16V
C909	1-126-395-11	ELECT CHIP	22uF	20%	16V
C910	1-126-395-11	ELECT CHIP	22uF	20%	16V
C911	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C912	1-126-395-11	ELECT CHIP	22uF	20%	16V
C913	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C914	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C920	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C921	1-126-395-11	ELECT CHIP	22uF	20%	16V
C922	1-126-395-11	ELECT CHIP	22uF	20%	16V
C923	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C924	1-128-390-11	ELECT CHIP	220uF	20%	6.3V
C925	1-128-390-11	ELECT CHIP	220uF	20%	6.3V
C927	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C938	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C939	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C940	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C941	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C942	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C943	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C944	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C945	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C950	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C951	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C962	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C963	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C972	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
< CONNECTOR >					
CN901	1-794-236-11	CONNECTOR, FFC/FPC 15P			
CN902	1-794-235-11	CONNECTOR, FFC/FPC 11P			
CNJ901	1-251-780-11	SOCKET, PIN (21P) (EURO AV2)			
CNJ902	1-251-780-11	SOCKET, PIN (21P) (EURO AV1 (RGB) -TV)			
< DIODE >					
D901	8-719-988-61	DIODE 1SS355TE-17			
D902	8-719-988-61	DIODE 1SS355TE-17			
D903	8-719-988-61	DIODE 1SS355TE-17			
D904	8-719-988-61	DIODE 1SS355TE-17			
D905	8-719-988-61	DIODE 1SS355TE-17			
D906	8-719-988-61	DIODE 1SS355TE-17			
D907	8-719-988-61	DIODE 1SS355TE-17			
D908	8-719-071-15	DIODE HZM6.8ZWA1TL			
D909	8-719-988-61	DIODE 1SS355TE-17			
D910	8-719-988-61	DIODE 1SS355TE-17			
D911	8-719-988-61	DIODE 1SS355TE-17			
D915	8-719-071-15	DIODE HZM6.8ZWA1TL			
D917	8-719-071-15	DIODE HZM6.8ZWA1TL			
D918	8-719-071-15	DIODE HZM6.8ZWA1TL			
D919	8-719-071-15	DIODE HZM6.8ZWA1TL			
D920	8-719-071-15	DIODE HZM6.8ZWA1TL			

Ref. No.	Part No.	Description	Remark		
D921	8-719-071-15	DIODE	HZM6.8ZWA1TL		
D922	8-719-071-15	DIODE	HZM6.8ZWA1TL		
D923	8-719-071-15	DIODE	HZM6.8ZWA1TL		
D924	8-719-071-15	DIODE	HZM6.8ZWA1TL		
D926	8-719-056-82	DIODE	UDZ-TE-17-6.2B		
D927	8-719-977-40	DIODE	UDZ-TE-17-13B		
D929	8-719-056-82	DIODE	UDZ-TE-17-6.2B		
D930	8-719-977-40	DIODE	UDZ-TE-17-13B		
D931	8-719-071-15	DIODE	HZM6.8ZWA1TL		
< FERRITE BEAD >					
FB901	1-414-553-11	FERRITE	0uH		
FB902	1-414-553-11	FERRITE	0uH		
FB903	1-414-553-11	FERRITE	0uH		
FB904	1-414-553-11	FERRITE	0uH		
FB905	1-414-553-11	FERRITE	0uH		
FB906	1-414-553-11	FERRITE	0uH		
FB907	1-414-553-11	FERRITE	0uH		
FB908	1-414-553-11	FERRITE	0uH		
FB909	1-414-553-11	FERRITE	0uH		
FB910	1-414-553-11	FERRITE	0uH		
FB911	1-414-553-11	FERRITE	0uH		
FB912	1-414-553-11	FERRITE	0uH		
FB913	1-414-553-11	FERRITE	0uH		
FB914	1-414-553-11	FERRITE	0uH		
FB915	1-414-553-11	FERRITE	0uH		
FB916	1-414-553-11	FERRITE	0uH		
FB917	1-414-553-11	FERRITE	0uH		
FB918	1-414-553-11	FERRITE	0uH		
< IC >					
IC901	8-759-663-94	IC	LA7106M-TLM		
IC902	8-759-446-66	IC	MM1113XFBE		
IC903	8-759-567-33	IC	MM1225XFBE		
< COIL >					
L904	1-412-064-11	INDUCTOR CHIP	100uH		
< TRANSISTOR >					
Q901	8-729-421-19	TRANSISTOR	UN2213-TX		
Q902	8-729-422-27	TRANSISTOR	2SD601A-QRS-TX		
Q903	8-729-424-08	TRANSISTOR	UN2111-TX		
Q904	8-729-422-27	TRANSISTOR	2SD601A-QRS-TX		
Q906	8-729-421-19	TRANSISTOR	UN2213-TX		
Q907	8-729-424-08	TRANSISTOR	UN2111-TX		
Q908	8-729-421-22	TRANSISTOR	UN2211-TX		
Q909	8-729-421-19	TRANSISTOR	UN2213-TX		
Q910	8-729-424-08	TRANSISTOR	UN2111-TX		
Q911	8-729-421-19	TRANSISTOR	UN2213-TX		
Q912	8-729-422-27	TRANSISTOR	2SD601A-QRS-TX		
Q913	8-729-422-27	TRANSISTOR	2SD601A-QRS-TX		
Q914	8-729-422-27	TRANSISTOR	2SD601A-QRS-TX		
Q915	8-729-422-27	TRANSISTOR	2SD601A-QRS-TX		
Q916	8-729-422-27	TRANSISTOR	2SD601A-QRS-TX		
Q917	8-729-421-19	TRANSISTOR	UN2213-TX		
< RESISTOR >					
R902	1-216-089-91	RES, CHIP	47K	5%	1/10W
R904	1-216-089-91	RES, CHIP	47K	5%	1/10W
R906	1-216-089-91	RES, CHIP	47K	5%	1/10W

Ref. No.	Part No.	Description	Remark
R907	1-216-089-91	RES, CHIP 47K 5%	1/10W
R908	1-216-105-91	RES, CHIP 220K 5%	1/10W
R909	1-216-037-00	METAL CHIP 330 5%	1/10W
R910	1-216-037-00	METAL CHIP 330 5%	1/10W
R911	1-216-037-00	METAL CHIP 330 5%	1/10W
R912	1-216-037-00	METAL CHIP 330 5%	1/10W
R913	1-216-065-91	RES, CHIP 4.7K 5%	1/10W
R914	1-216-057-00	METAL CHIP 2.2K 5%	1/10W
R915	1-216-051-00	METAL CHIP 1.2K 5%	1/10W
R916	1-216-057-00	METAL CHIP 2.2K 5%	1/10W
R917	1-216-057-00	METAL CHIP 2.2K 5%	1/10W
R918	1-216-021-00	METAL CHIP 68 5%	1/10W
R920	1-216-049-91	RES, CHIP 1K 5%	1/10W
R921	1-216-073-00	METAL CHIP 10K 5%	1/10W
R922	1-216-021-00	METAL CHIP 68 5%	1/10W
R923	1-216-041-00	METAL CHIP 470 5%	1/10W
R924	1-216-041-00	METAL CHIP 470 5%	1/10W
R925	1-216-041-00	METAL CHIP 470 5%	1/10W
R926	1-216-041-00	METAL CHIP 470 5%	1/10W
R927	1-216-021-00	METAL CHIP 68 5%	1/10W
R928	1-216-021-00	METAL CHIP 68 5%	1/10W
R929	1-216-021-00	METAL CHIP 68 5%	1/10W
R930	1-216-065-91	RES, CHIP 4.7K 5%	1/10W
R931	1-216-065-91	RES, CHIP 4.7K 5%	1/10W
R932	1-216-065-91	RES, CHIP 4.7K 5%	1/10W
R933	1-216-065-91	RES, CHIP 4.7K 5%	1/10W
R934	1-216-065-91	RES, CHIP 4.7K 5%	1/10W
R938	1-216-025-91	RES, CHIP 100 5%	1/10W
R939	1-216-017-91	RES, CHIP 47 5%	1/10W
R944	1-216-073-00	METAL CHIP 10K 5%	1/10W
R950	1-216-081-00	METAL CHIP 22K 5%	1/10W
R951	1-216-081-00	METAL CHIP 22K 5%	1/10W
< RELAY >			
RY901	1-755-184-11	RELAY	
RY902	1-755-184-11	RELAY	
RY903	1-755-184-11	RELAY	
RY904	1-755-184-11	RELAY	
RY905	1-755-184-11	RELAY	
RY906	1-755-184-11	RELAY	

*	A-6065-455-A	HP-127 BOARD, COMPLETE (S535D)	
*	A-6065-470-A	HP-127 BOARD, COMPLETE (S735D: E, EA, AUS)	
*	A-6065-476-A	HP-127 BOARD, COMPLETE (S735D: AEP, UK, RU)	
(Ref.No. 2, 000 Series)			
< CAPACITOR >			
C501	1-163-019-00	CERAMIC CHIP 0.0068uF 10% 50V	
C502	1-163-019-00	CERAMIC CHIP 0.0068uF 10% 50V	
C503	1-163-021-91	CERAMIC CHIP 0.01uF 10% 50V	
C504	1-104-664-11	ELECT 47uF 20% 16V	
< CONNECTOR >			
CN501	1-784-642-21	CONNECTOR, BOARD TO BOARD 11P	
< DIODE >			
D502	8-719-066-39	DIODE EB3804X-TP-J300K (MULTI)	

Ref. No.	Part No.	Description	Remark
D503	8-719-056-06	DIODE SLR-342DCT32 (HP-V) (S735D)	
D504	8-719-071-15	DIODE HZM6.8ZWA1TL	
D506	8-719-071-15	DIODE HZM6.8ZWA1TL	
D507	8-719-800-76	DIODE MA153-TX	
< IC >			
IC501	8-719-066-43	DIODE GP1U28Y	
< JACK >			
J501	1-785-505-31	JACK, LARGE TYPE (PHONES) (S535D)	
J501	1-785-505-41	JACK, LARGE TYPE (PHONES) (S735D)	
< RESISTOR >			
R502	1-216-027-00	METAL CHIP 120 5%	1/10W
R503	1-216-037-00	METAL CHIP 330 5%	1/10W (S735D)
R506	1-216-071-00	METAL CHIP 8.2K 5%	1/10W
R507	1-216-081-00	METAL CHIP 22K 5%	1/10W
R508	1-216-063-91	RES, CHIP 3.9K 5%	1/10W
R509	1-414-233-22	INDUCTOR CHIP 0uH	
R510	1-414-233-22	INDUCTOR CHIP 0uH	
R511	1-216-295-91	SHORT 0	
R513	1-216-101-00	METAL CHIP 150K 5%	1/10W
R514	1-216-017-91	RES, CHIP 47 5%	1/10W
R515	1-216-089-91	RES, CHIP 47K 5%	1/10W
R518	1-163-021-91	CERAMIC CHIP 0.01uF 10% 50V	
< VARIABLE RESISTOR >			
RV501	1-227-186-11	RES, VAR, CARBON 500/500 (LEVEL)	
< SWITCH >			
S501	1-771-574-21	SWITCH, TACTILE (HP-V) (S735D)	
S502	1-771-574-21	SWITCH, TACTILE (SHUFFLE)	
S503	1-771-574-21	SWITCH, TACTILE (REPEAT)	

*	A-6065-443-A	MB-86 BOARD, COMPLETE (S335: AEP50, UK/S336: AEP06, UK)	
*	A-6065-445-A	MB-86 BOARD, COMPLETE (S335: AEP51/S336: AEP08)	
*	A-6065-446-A	MB-86 BOARD, COMPLETE (S335: RU)	
*	A-6065-448-A	MB-86 BOARD, COMPLETE (S345)	
*	A-6065-449-A	MB-86 BOARD, COMPLETE (S335: E, EA)	
*	A-6065-450-A	MB-86 BOARD, COMPLETE (S336: AUS)	
*	A-6065-452-A	MB-86 BOARD, COMPLETE (S535D: AEP52)	
*	A-6065-454-A	MB-86 BOARD, COMPLETE (S535D: AEP53, UK)	
*	A-6065-478-A	MB-86 BOARD, COMPLETE (S735D: AEP51, UK)	
*	A-6065-479-A	MB-86 BOARD, COMPLETE (S735D: AEP50)	
*	A-6065-480-A	MB-86 BOARD, COMPLETE (S735D: RU)	
*	A-6065-484-A	MB-86 BOARD, COMPLETE (S735D: E)	
*	A-6065-485-A	MB-86 BOARD, COMPLETE (S735D: EA)	
*	A-6065-486-A	MB-86 BOARD, COMPLETE (S735D: AUS)	

(Ref.No. 1, 000 Series)			
< CAPACITOR >			
C101	1-162-919-11	CERAMIC CHIP 22PF 5% 50V	
C102	1-162-919-11	CERAMIC CHIP 22PF 5% 50V	
C103	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C104	1-126-209-11	ELECT CHIP 100uF 20% 4V	

MB-86

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
C105	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C308	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C106	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C309	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C107	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C310	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C108	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C311	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C109	1-162-916-11	CERAMIC CHIP	12PF	5%	50V	C312	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C110	1-162-916-11	CERAMIC CHIP	12PF	5%	50V	C313	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C111	1-126-209-11	ELECT CHIP	100uF	20%	4V	C314	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C112	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V	C315	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C114	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C316	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C115	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C317	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C116	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C318	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C117	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C319	1-126-206-11	ELECT CHIP	100uF	20%	6.3V
C118	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C320	1-126-206-11	ELECT CHIP	100uF	20%	6.3V
C119	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C321	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C120	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C322	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C201	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C324	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C202	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C325	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C203	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C326	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C204	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C327	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C205	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C328	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C206	1-124-779-00	ELECT CHIP	10uF	20%	16V	C329	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C207	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C330	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C208	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	C331	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C209	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	C332	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C210	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	C401	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C211	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	C405	1-126-204-11	ELECT CHIP	47uF	20%	16V
C212	1-124-779-00	ELECT CHIP	10uF	20%	16V	C407	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C213	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C408	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C214	1-164-172-11	CERAMIC CHIP	0.0056uF	10%	25V	C409	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C215	1-164-739-11	CERAMIC CHIP	560PF	5%	50V	C410	1-162-921-11	CERAMIC CHIP	33PF	5%	50V
C216	1-164-172-11	CERAMIC CHIP	0.0056uF	10%	25V	C411	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C217	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C412	1-110-563-11	CERAMIC CHIP	0.068uF	10%	16V
C218	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C413	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C219	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C414	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C221	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V	C415	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C222	1-164-730-11	CERAMIC CHIP	0.0012uF	10%	50V	C416	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C223	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V	C417	1-115-467-11	CERAMIC CHIP	0.22uF	10%	10V
C224	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	C418	1-162-921-11	CERAMIC CHIP	33PF	5%	50V
C225	1-164-217-11	CERAMIC CHIP	150PF	5%	50V	C419	1-110-563-11	CERAMIC CHIP	0.068uF	10%	16V
C226	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C420	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C227	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C421	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C228	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C422	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C229	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C423	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V
C230	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C424	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C231	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C425	1-115-467-11	CERAMIC CHIP	0.22uF	10%	10V
C232	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C426	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C233	1-124-779-00	ELECT CHIP	10uF	20%	16V	C427	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C234	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C428	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V
C235	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V	C429	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V
C236	1-164-739-11	CERAMIC CHIP	560PF	5%	50V	C430	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C237	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C431	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C238	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C433	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C239	1-162-969-11	CERAMIC CHIP	0.0068uF	10%	25V	C434	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C301	1-110-563-11	CERAMIC CHIP	0.068uF	10%	16V	C435	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C302	1-126-209-11	ELECT CHIP	100uF	20%	4V	C436	1-164-677-11	CERAMIC CHIP	0.033uF	10%	16V
C303	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C437	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C304	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C438	1-164-677-11	CERAMIC CHIP	0.033uF	10%	16V
C305	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C439	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C306	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C440	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C307	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C441	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C442	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V	C540	1-126-193-11	ELECT CHIP	1uF	20%	50V
C443	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V	C541	1-124-779-00	ELECT CHIP	10uF	20%	16V
C444	1-126-205-11	ELECT CHIP	47uF	20%	6.3V	C542	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V
C445	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C601	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C446	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C602	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C447	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V					10%	25V
C448	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V	C603	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C449	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V					10%	25V
C450	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V	C604	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C451	1-126-204-11	ELECT CHIP	47uF	20%	16V					10%	25V
C452	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C701	1-126-209-11	ELECT CHIP	100uF	20%	4V
C453	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C454	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C702	1-126-209-11	ELECT CHIP	100uF	20%	4V
C455	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C456	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C703	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C457	1-115-467-11	CERAMIC CHIP	0.22uF	10%	10V					10%	25V
C458	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C704	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C459	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V					10%	25V
C460	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C705	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C462	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C463	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C706	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C465	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V					10%	25V
C466	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C707	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C501	1-124-779-00	ELECT CHIP	10uF	20%	16V					10%	25V
C502	1-124-779-00	ELECT CHIP	10uF	20%	16V	C708	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C503	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C504	1-124-779-00	ELECT CHIP	10uF	20%	16V	C709	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C505	1-126-206-11	ELECT CHIP	100uF	20%	6.3V					10%	25V
C506	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C710	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C507	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C508	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C711	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C509	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C510	1-124-779-00	ELECT CHIP	10uF	20%	16V	C712	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C511	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C512	1-126-206-11	ELECT CHIP	100uF	20%	6.3V	C713	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C513	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C514	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C714	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C515	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C516	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C715	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C517	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C518	1-107-826-91	CERAMIC CHIP	0.1uF	10%	16V	C716	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C519	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C520	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C717	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C521	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C522	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C718	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C523	1-126-246-11	ELECT CHIP	220uF	20%	4V					10%	25V
C524	1-126-204-11	ELECT CHIP	47uF	20%	16V	C719	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C525	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C528	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C720	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C529	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C530	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C721	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C531	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C532	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C722	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C533	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C534	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C723	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C535	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C536	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C801	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C537	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
C538	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C802	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C539	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V					10%	25V
						C803	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
										10%	25V
						C804	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
										10%	25V

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C805	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (S735D)	FL507	1-233-893-21	FILTER, CHIP EMI			
C806	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (S735D)	FL508	1-234-177-21	FILTER, CHIP EMI			
						FL601	1-234-177-21	FILTER, CHIP EMI (S535D/S735D)			
						FL801	1-234-177-21	FILTER, CHIP EMI (S735D)			
		< CONNECTOR >						< IC >			
* CN102	1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P				IC101	8-759-667-20	IC BR9080F-E2 (S335/S336/S345)			
CN201	1-764-530-21	CONNECTOR, FFC/FPC (ZIF) 23P				IC101	8-759-667-21	IC BR9160F-E2 (S535D)			
CN202	1-566-529-11	CONNECTOR, FPC (ZIF) 13P				IC101	8-759-668-01	IC BR9040F-D-E2 (S735D)			
CN401	1-794-234-11	CONNECTOR, FFC/FPC 6P				IC102	8-759-663-92	IC MB91107PFV-G-BND			
CN402	1-779-993-11	PIN, CONNECTOR (PWB) 5P				IC103	8-759-427-92	IC PST9126NL			
CN501	1-794-324-11	CONNECTOR, BOARD TO BOARD 34P									
CN701	1-794-324-11	CONNECTOR, BOARD TO BOARD 34P				IC104	8-759-561-60	IC MBM29LV160B-90PFTN (S335/S336/S345)			
		< DIODE >				IC104	8-759-594-13	IC MBM29DL324BD-90PFTN (S535D/S735D)			
D101	8-719-071-34	DIODE RB521S-30-TE61				IC105	8-759-667-86	IC CXD9572N-E2			
D201	8-719-988-61	DIODE 1SS355TE-17				IC201	8-759-567-24	IC SS133P3722			
		< FUSE >				IC301	8-759-486-55	IC NJM2370U33-TE2			
△ F401	1-533-771-21	FUSE (SMD) (0.8A)				IC302	8-759-666-84	IC CXD9576R			
△ F402	1-533-771-21	FUSE (SMD) (0.8A)				IC303	8-759-643-10	IC GM71V18160CT-6TR			
		< FERRITE BEAD >				IC401	8-759-660-88	IC LA6553-TE-L			
						IC402	8-759-660-88	IC LA6553-TE-L			
						IC403	8-759-338-78	IC BA10324AFV-E2			
FB102	1-414-226-21	INDUCTOR CHIP	0uH			IC404	8-759-660-87	IC CXD9569R			
FB103	1-414-226-21	INDUCTOR CHIP	0uH	(S535D/S735D)		IC502	8-752-399-55	IC CXD1932Q			
FB104	1-414-226-21	INDUCTOR CHIP	0uH			IC503	8-759-486-55	IC NJM2370U33-TE2			
FB105	1-414-226-21	INDUCTOR CHIP	0uH			IC504	8-759-573-19	IC MT48LC1M16A1TG-7S			
FB106	1-414-226-21	INDUCTOR CHIP	0uH	(S535D/S735D)		IC505	8-759-573-19	IC MT48LC1M16A1TG-7S			
FB107	1-414-226-21	INDUCTOR CHIP	0uH			IC506	8-759-669-28	IC PQ1R18			
FB109	1-414-226-21	INDUCTOR CHIP	0uH			IC601	8-759-663-93	IC CXD9549R (S535D/S735D)			
FB110	1-414-226-21	INDUCTOR CHIP	0uH			IC701	8-752-402-09	IC CXD1939R (S535D/S735D)			
FB111	1-414-226-21	INDUCTOR CHIP	0uH	(S535D/S735D)		IC801	8-759-670-52	IC CXD9547Q-TE-B (S735D)			
FB117	1-414-226-21	INDUCTOR CHIP	0uH	(S735D)		IC802	8-759-641-58	IC KM29W16000AT-T (S735D)			
FB501	1-469-324-21	FERRITE	0uH					< COIL >			
FB502	1-469-324-21	FERRITE	0uH			L201	1-412-031-11	INDICATOR (CHIP)	47uH		
FB503	1-469-324-21	FERRITE	0uH					< TRANSISTOR >			
FB504	1-469-324-21	FERRITE	0uH			Q201	8-729-820-86	TRANSISTOR 2SB1121-T-TD			
FB505	1-469-324-21	FERRITE	0uH			Q203	8-729-402-42	TRANSISTOR UN5213-TX			
FB506	1-469-324-21	FERRITE	0uH					< RESISTOR >			
FB507	1-469-324-21	FERRITE	0uH								
FB508	1-414-226-21	INDUCTOR CHIP	0uH								
FB509	1-414-226-21	INDUCTOR CHIP	0uH	(S535D/S735D)							
		< FILTER >				R002	1-216-801-11	METAL CHIP	22	5%	1/16W
FL101	1-234-177-21	FILTER, CHIP EMI				R009	1-216-821-11	METAL CHIP	1K	5%	1/16W
FL102	1-234-177-21	FILTER, CHIP EMI				R012	1-216-833-91	RES, CHIP	10K	5%	1/16W
FL103	1-234-177-21	FILTER, CHIP EMI				R013	1-216-833-91	RES, CHIP	10K	5%	1/16W
FL201	1-234-177-21	FILTER, CHIP EMI				R014	1-216-805-11	METAL CHIP	47	5%	1/16W
FL301	1-234-177-21	FILTER, CHIP EMI				R015	1-216-809-11	METAL CHIP	100	5%	1/16W
FL302	1-234-177-21	FILTER, CHIP EMI				R016	1-216-821-11	METAL CHIP	1K	5%	1/16W
FL303	1-234-177-21	FILTER, CHIP EMI				R017	1-216-821-11	METAL CHIP	1K	5%	1/16W
FL402	1-234-177-21	FILTER, CHIP EMI				R019	1-216-817-11	METAL CHIP	470	5%	1/16W
FL501	1-234-177-21	FILTER, CHIP EMI				R020	1-216-295-91	SHORT	0		
FL502	1-234-177-21	FILTER, CHIP EMI				R021	1-216-296-91	SHORT	0		
FL503	1-234-177-21	FILTER, CHIP EMI				R041	1-216-797-11	METAL CHIP	10	5%	1/16W
FL504	1-234-177-21	FILTER, CHIP EMI				R042	1-216-797-11	METAL CHIP	10	5%	1/16W
FL505	1-234-177-21	FILTER, CHIP EMI				R101	1-216-833-91	RES, CHIP	10K	5%	1/16W
FL506	1-234-177-21	FILTER, CHIP EMI				R102	1-216-833-91	RES, CHIP	10K	5%	1/16W
						R104	1-216-801-11	METAL CHIP	22	5%	1/16W

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R105	1-216-797-11	METAL CHIP	10	5%	1/16W	R188	1-216-833-91	RES, CHIP	10K	5%	1/16W
R114	1-216-845-11	METAL CHIP	100K	5%	1/16W	R190	1-216-833-91	RES, CHIP	10K	5%	1/16W
R118	1-216-833-91	RES, CHIP	10K	5%	1/16W	R191	1-216-833-91	RES, CHIP	10K	5%	1/16W
R120	1-216-833-91	RES, CHIP	10K	5%	1/16W						
R121	1-216-864-11	METAL CHIP	0	5%	1/16W	R195	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
R123	1-216-827-11	METAL CHIP	3.3K	5%	1/16W	R201	1-216-815-11	METAL CHIP	330	5%	1/16W
R124	1-216-065-91	RES, CHIP	4.7K	5%	1/10W	R202	1-216-809-11	METAL CHIP	100	5%	1/16W
		(S336: AUS/S735D: AUS)				R203	1-216-809-11	METAL CHIP	100	5%	1/16W
R124	1-216-071-00	METAL CHIP	8.2K	5%	1/10W	R204	1-216-837-11	METAL CHIP	22K	5%	1/16W
		(S335: E, EA/S735D: EA)				R206	1-216-803-11	METAL CHIP	33	5%	1/16W
R124	1-216-076-00	METAL CHIP	13K	5%	1/10W	R207	1-216-803-11	METAL CHIP	33	5%	1/16W
		(S345/S735D: E)				R208	1-216-841-11	METAL CHIP	47K	5%	1/16W
R124	1-216-089-91	RES, CHIP	47K	5%	1/10W	R209	1-216-797-11	METAL CHIP	10	5%	1/16W
		(S335: RU/S735D: RU)				R210	1-216-820-11	METAL CHIP	820	5%	1/16W
R124	1-216-093-91	RES, CHIP	68K	5%	1/10W	R211	1-216-811-11	METAL CHIP	150	5%	1/16W
		(S335: AEP51/S336: AEP08/S535D: AEP52/ S735D: AEP50)				R214	1-216-834-11	METAL CHIP	12K	5%	1/16W
R124	1-216-099-00	METAL CHIP	120K	5%	1/10W	R215	1-216-813-11	METAL CHIP	220	5%	1/16W
		(S335: AEP50, UK/S336: AEP06, UK/ S535D: AEP53, UK/S735D: AEP51, UK)				R217	1-216-861-11	METAL CHIP	2.2M	5%	1/16W
R125	1-216-827-11	METAL CHIP	3.3K	5%	1/16W	R222	1-216-833-91	RES, CHIP	10K	5%	1/16W
R126	1-216-105-91	RES, CHIP	220K	5%	1/10W	R223	1-216-833-91	RES, CHIP	10K	5%	1/16W
		(S735D)				R224	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R126	1-216-113-00	METAL CHIP	470K	5%	1/10W	R225	1-216-833-91	RES, CHIP	10K	5%	1/16W
		(S535D)				R301	1-218-879-11	METAL CHIP	22K	0.5%	1/16W
R127	1-216-827-11	METAL CHIP	3.3K	5%	1/16W	R302	1-218-831-11	METAL CHIP	220	0.5%	1/16W
R128	1-216-093-91	RES, CHIP	68K	5%	1/10W	R303	1-218-883-11	METAL CHIP	33K	0.5%	1/16W
		(S335: RU/S345/S735D: RU, E)				R304	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R128	1-216-099-00	METAL CHIP	120K	5%	1/10W	R305	1-216-838-11	METAL CHIP	27K	5%	1/16W
		(S336: AUS/S735D: AUS)				R306	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R128	1-216-113-00	METAL CHIP	470K	5%	1/10W	R307	1-216-822-11	METAL CHIP	1.2K	5%	1/16W
		(S335: AEP, UK, E, EA/S336: AEP, UK/ S535D/S735D: AEP, UK, EA)				R309	1-216-809-11	METAL CHIP	100	5%	1/16W
R129	1-216-827-11	METAL CHIP	3.3K	5%	1/16W	R310	1-216-833-91	RES, CHIP	10K	5%	1/16W
R130	1-216-833-91	RES, CHIP	10K	5%	1/16W	R311	1-216-845-11	METAL CHIP	100K	5%	1/16W
R131	1-216-833-91	RES, CHIP	10K	5%	1/16W	R313	1-218-855-11	METAL CHIP	2.2K	0.5%	1/16W
R136	1-216-833-91	RES, CHIP	10K	5%	1/16W	R314	1-218-847-11	METAL CHIP	1K	0.5%	1/16W
R138	1-216-797-11	METAL CHIP	10	5%	1/16W	R315	1-218-871-11	METAL CHIP	10K	0.5%	1/16W
R139	1-216-797-11	METAL CHIP	10	5%	1/16W	R316	1-218-871-11	METAL CHIP	10K	0.5%	1/16W
R140	1-216-797-11	METAL CHIP	10	5%	1/16W	R317	1-216-833-91	RES, CHIP	10K	5%	1/16W
R154	1-216-864-11	METAL CHIP	0	5%	1/16W	R318	1-216-833-91	RES, CHIP	10K	5%	1/16W
R158	1-216-797-11	METAL CHIP	10	5%	1/16W	R319	1-218-853-11	METAL CHIP	1.8K	0.5%	1/16W
R159	1-216-821-11	METAL CHIP	1K	5%	1/16W	R320	1-216-833-91	RES, CHIP	10K	5%	1/16W
R161	1-216-833-91	RES, CHIP	10K	5%	1/16W	R321	1-216-813-11	METAL CHIP	220	5%	1/16W
R164	1-216-821-11	METAL CHIP	1K	5%	1/16W	R327	1-216-809-11	METAL CHIP	100	5%	1/16W
R166	1-216-833-91	RES, CHIP	10K	5%	1/16W	R338	1-216-801-11	METAL CHIP	22	5%	1/16W
R167	1-216-833-91	RES, CHIP	10K	5%	1/16W	R401	1-216-833-91	RES, CHIP	10K	5%	1/16W
R168	1-216-833-91	RES, CHIP	10K	5%	1/16W	R402	1-216-833-91	RES, CHIP	10K	5%	1/16W
R169	1-216-833-91	RES, CHIP	10K	5%	1/16W	R403	1-216-833-91	RES, CHIP	10K	5%	1/16W
R170	1-216-833-91	RES, CHIP	10K	5%	1/16W	R404	1-216-821-11	METAL CHIP	1K	5%	1/16W
R171	1-216-833-91	RES, CHIP	10K	5%	1/16W	R405	1-216-821-11	METAL CHIP	1K	5%	1/16W
		(S335/S336/S345/S735D)				R406	1-216-821-11	METAL CHIP	1K	5%	1/16W
R172	1-216-833-91	RES, CHIP	10K	5%	1/16W	R407	1-216-797-11	METAL CHIP	10	5%	1/16W
R173	1-216-833-91	RES, CHIP	10K	5%	1/16W	R408	1-216-311-00	METAL CHIP	6.8	5%	1/10W
R174	1-216-833-91	RES, CHIP	10K	5%	1/16W	R409	1-216-797-11	METAL CHIP	10	5%	1/16W
R175	1-216-833-91	RES, CHIP	10K	5%	1/16W	R411	1-216-835-11	METAL CHIP	15K	5%	1/16W
R176	1-216-833-91	RES, CHIP	10K	5%	1/16W	R412	1-216-797-11	METAL CHIP	10	5%	1/16W
R183	1-216-833-91	RES, CHIP	10K	5%	1/16W	R415	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R184	1-216-801-11	METAL CHIP	22	5%	1/16W	R416	1-216-847-11	METAL CHIP	150K	5%	1/16W
R186	1-216-864-11	METAL CHIP	0	5%	1/16W	R417	1-216-843-11	METAL CHIP	68K	5%	1/16W
		(S535D/S735D)				R418	1-216-847-11	METAL CHIP	150K	5%	1/16W
R187	1-216-833-91	RES, CHIP	10K	5%	1/16W	R419	1-216-835-11	METAL CHIP	15K	5%	1/16W
		(S535D/S735D)				R420	1-216-835-11	METAL CHIP	15K	5%	1/16W
						R421	1-216-836-11	METAL CHIP	18K	5%	1/16W

MB-86

Ref. No.	Part No.	Description			Remark
R422	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R423	1-216-833-91	RES, CHIP	10K	5%	1/16W
R424	1-216-844-11	METAL CHIP	82K	5%	1/16W
R425	1-216-845-11	METAL CHIP	100K	5%	1/16W
R426	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R427	1-216-835-11	METAL CHIP	15K	5%	1/16W
R428	1-216-841-11	METAL CHIP	47K	5%	1/16W
R429	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R436	1-216-833-91	RES, CHIP	10K	5%	1/16W
R443	1-216-844-11	METAL CHIP	82K	5%	1/16W
R444	1-216-843-11	METAL CHIP	68K	5%	1/16W
R445	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R446	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R447	1-216-835-11	METAL CHIP	15K	5%	1/16W
R448	1-216-835-11	METAL CHIP	15K	5%	1/16W
R449	1-216-832-11	METAL CHIP	8.2K	5%	1/16W
R450	1-216-833-91	RES, CHIP	10K	5%	1/16W
R451	1-216-821-11	METAL CHIP	1K	5%	1/16W
R452	1-216-797-11	METAL CHIP	10	5%	1/16W
R454	1-216-311-00	METAL CHIP	6.8	5%	1/10W
R458	1-216-833-91	RES, CHIP	10K	5%	1/16W
R459	1-216-833-91	RES, CHIP	10K	5%	1/16W
R460	1-216-845-11	METAL CHIP	100K	5%	1/16W
R463	1-216-821-11	METAL CHIP	1K	5%	1/16W
R464	1-218-899-11	METAL CHIP	150K	0.5%	1/16W
R465	1-216-821-11	METAL CHIP	1K	5%	1/16W
R466	1-216-821-11	METAL CHIP	1K	5%	1/16W
R467	1-216-821-11	METAL CHIP	1K	5%	1/16W
R468	1-216-821-11	METAL CHIP	1K	5%	1/16W
R469	1-218-889-11	METAL CHIP	56K	0.5%	1/16W
R470	1-218-850-11	METAL CHIP	1.3K	0.5%	1/16W
R471	1-218-899-11	METAL CHIP	150K	0.5%	1/16W
R472	1-218-847-11	METAL CHIP	1K	0.5%	1/16W
R473	1-218-850-11	METAL CHIP	1.3K	0.5%	1/16W
R474	1-218-889-11	METAL CHIP	56K	0.5%	1/16W
R475	1-216-797-11	METAL CHIP	10	5%	1/16W
R476	1-216-813-11	METAL CHIP	220	5%	1/16W
R477	1-216-821-11	METAL CHIP	1K	5%	1/16W
R478	1-216-836-11	METAL CHIP	18K	5%	1/16W
R479	1-216-836-11	METAL CHIP	18K	5%	1/16W
R480	1-216-824-11	METAL CHIP	1.8K	5%	1/16W
R481	1-216-824-11	METAL CHIP	1.8K	5%	1/16W
R482	1-216-803-11	METAL CHIP	33	5%	1/16W
R483	1-216-834-11	METAL CHIP	12K	5%	1/16W
R484	1-216-834-11	METAL CHIP	12K	5%	1/16W
R485	1-216-817-11	METAL CHIP	470	5%	1/16W
R486	1-218-847-11	METAL CHIP	1K	0.5%	1/16W
R487	1-218-847-11	METAL CHIP	1K	0.5%	1/16W
R488	1-218-847-11	METAL CHIP	1K	0.5%	1/16W
R489	1-218-847-11	METAL CHIP	1K	0.5%	1/16W
R490	1-216-817-11	METAL CHIP	470	5%	1/16W
R491	1-216-821-11	METAL CHIP	1K	5%	1/16W
R492	1-216-817-11	METAL CHIP	470	5%	1/16W
R493	1-216-817-11	METAL CHIP	470	5%	1/16W
R494	1-216-817-11	METAL CHIP	470	5%	1/16W
R495	1-216-797-11	METAL CHIP	10	5%	1/16W
R496	1-216-821-11	METAL CHIP	1K	5%	1/16W
R497	1-216-821-11	METAL CHIP	1K	5%	1/16W
R501	1-216-809-11	METAL CHIP	100	5%	1/16W
R502	1-216-833-91	RES, CHIP	10K	5%	1/16W

Ref. No.	Part No.	Description			Remark
R503	1-218-831-11	METAL CHIP	220	0.5%	1/16W
R504	1-218-831-11	METAL CHIP	220	0.5%	1/16W
R505	1-218-831-11	METAL CHIP	220	0.5%	1/16W
R506	1-218-831-11	METAL CHIP	220	0.5%	1/16W
R507	1-218-831-11	METAL CHIP	220	0.5%	1/16W
R508	1-218-831-11	METAL CHIP	220	0.5%	1/16W
R509	1-216-864-11	METAL CHIP	0	5%	1/16W (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)
R510	1-216-864-11	METAL CHIP	0	5%	1/16W (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)
R511	1-216-864-11	METAL CHIP	0	5%	1/16W (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)
R517	1-216-833-91	RES, CHIP	10K	5%	1/16W
R518	1-216-822-11	METAL CHIP	1.2K	5%	1/16W
R521	1-216-864-11	METAL CHIP	0	5%	1/16W (S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)
R526	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
R527	1-216-864-11	METAL CHIP	0	5%	1/16W
R529	1-216-833-91	RES, CHIP	10K	5%	1/16W
R530	1-216-833-91	RES, CHIP	10K	5%	1/16W
R540	1-216-864-11	METAL CHIP	0	5%	1/16W
R542	1-216-864-11	METAL CHIP	0	5%	1/16W
R603	1-216-809-11	METAL CHIP	100	5%	1/16W (S535D/S735D)
R605	1-216-864-11	METAL CHIP	0	5%	1/16W (S535D/S735D)
R701	1-216-864-11	METAL CHIP	0	5%	1/16W (S335/S336/S345)
R702	1-216-864-11	METAL CHIP	0	5%	1/16W (S535D/S735D)
R708	1-216-864-11	METAL CHIP	0	5%	1/16W (S535D/S735D)
R710	1-216-864-11	METAL CHIP	0	5%	1/16W (S535D/S735D)
R711	1-216-864-11	METAL CHIP	0	5%	1/16W (S535D/S735D)
R712	1-216-833-91	RES, CHIP	10K	5%	1/16W (S535D/S735D)
R714	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)
R715	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)
R719	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)
R720	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)
R721	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)
R722	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)
R723	1-216-809-11	METAL CHIP	100	5%	1/16W (S535D/S735D)
R724	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)
R725	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)
R727	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)
R728	1-216-841-11	METAL CHIP	47K	5%	1/16W (S535D/S735D)

Ref. No.	Part No.	Description	Remark
R729	1-216-841-11	METAL CHIP 47K	5% 1/16W (S535D/S735D)
R731	1-216-864-11	METAL CHIP 0	5% 1/16W (S535D/S735D)
R733	1-216-841-11	METAL CHIP 47K	5% 1/16W (S535D/S735D)
R750	1-216-864-11	METAL CHIP 0	5% 1/16W (S335/S336/S345)
R751	1-216-864-11	METAL CHIP 0	5% 1/16W (S335/S336/S345)
R752	1-216-864-11	METAL CHIP 0	5% 1/16W (S335/S336/S345)
R753	1-216-864-11	METAL CHIP 0	5% 1/16W (S335/S336/S345)
R754	1-216-864-11	METAL CHIP 0	5% 1/16W (S335/S336/S345)
R755	1-216-864-11	METAL CHIP 0	5% 1/16W (S335/S336/S345)
R766	1-414-226-21	INDUCTOR CHIP 0uH	
R767	1-414-226-21	INDUCTOR CHIP 0uH	
R771	1-216-864-11	METAL CHIP 0	5% 1/16W
R772	1-216-864-11	METAL CHIP 0	5% 1/16W (S535D/S735D)
R774	1-216-864-11	METAL CHIP 0	5% 1/16W (S535D/S735D)
R781	1-216-864-11	METAL CHIP 0	5% 1/16W (S535D/S735D)
R785	1-216-864-11	METAL CHIP 0	5% 1/16W (S335/S336/S345)
R801	1-216-833-91	RES, CHIP 10K	5% 1/16W (S735D)
R808	1-216-809-11	METAL CHIP 100	5% 1/16W (S735D)
< COMPOSITION CIRCUIT BLOCK >			
* RB101	1-233-270-11	NETWORK, RES (8 GANG) 10K	
* RB102	1-233-270-11	NETWORK, RES (8 GANG) 10K	
< VARIABLE RESISTOR >			
RV501	1-223-583-11	RES, ADJ, CARBON 1K	
< VIBRATOR >			
X101	1-781-185-21	VIBRATOR, CERAMIC (12.5MHz)	
X102	1-781-867-21	VIBRATOR, CRYSTAL (27MHz)	

* A-6066-016-A	MS-48 BOARD, COMPLETE		

(Ref.No. 2, 000 Series)			
< CONNECTOR >			
CN001	1-794-197-11	CONNECTOR, FFC/FPC 6P	
< SWITCH >			
S001	1-771-562-11	SWITCH, LEVER (TRAY SENSOR)	
S002	1-762-386-11	SWITCH, PUSH (CHUCK SENSOR)	

Ref. No.	Part No.	Description	Remark
*	1-468-506-31	POWER BLOCK (HS16S9E)	*****
< CAPACITOR >			
C211	1-107-895-11	ELECT 330uF	35V
C213	1-126-947-11	ELECT 47uF	35V
C301	1-126-960-11	ELECT 1uF	50V
C311	1-107-895-11	ELECT 330uF	35V
C313	1-126-947-11	ELECT 47uF	35V
C315	1-126-947-11	ELECT 47uF	35V
C511	1-107-911-11	ELECT 220uF	35V
C513	1-126-947-11	ELECT 47uF	50V
C611	1-107-895-11	ELECT 330uF	35V
C613	1-126-948-11	ELECT 100uF	35V
< DIODE >			
D101	9-885-000-79	DIODE S1WBA60	
D104	8-719-983-00	DIODE MTZJ-T-77-2.4B	
D105	8-719-991-33	DIODE 1SS133T-77	
D211	8-719-027-43	DIODE S2L20U	
D212	8-719-160-87	DIODE RD33FB2	
D311	8-719-018-83	DIODE D2S4M	
D315	8-719-991-33	DIODE 1SS133T-77	
D511	8-719-032-12	DIODE D1NS6	
D611	8-719-500-50	DIODE D3S4M	
D613	8-719-991-33	DIODE 1SS133T-77	
D615	8-719-064-11	DIODE SPR-325MVW (ON/STANDBY)	
< IC >			
IC301	8-759-420-19	IC AN1431T	
< PHOTO COUPLER >			
△PC101	8-749-923-91	PHOTO COUPLER PS2501	
< TRANSISTOR >			
Q102	8-729-024-00	TRANSISTOR 2SC3377	
Q312	8-729-901-41	TRANSISTOR 2SC1740S	
Q611	8-729-921-42	TRANSISTOR 2SA1679	
Q615	8-729-029-46	TRANSISTOR DTA143ESA	
Q621	8-729-029-68	TRANSISTOR DTC114TSA	
(Ref.No. 3, 000 Series)			

MISCELLANEOUS			

7	1-771-913-11	SWITCH, TACTILE (S335/S336/S345/S535D)	
58	1-418-097-11	ENCORE, ROTARY (S735D)	
110	1-792-457-11	CABLE, FLEXIBLE FLAT (FMM-33)	
△114	1-769-744-91	CORD, POWER	
(EXCEPT S336: AUS/S735D: AUS)			
△114	1-790-588-11	CORD, POWER (S336: AUS/S735D: AUS)	
117	1-792-455-11	CABLE, FLEXIBLE FLAT (FAE-1)	
(S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)			
118	1-792-456-11	CABLE, FLEXIBLE FLAT (FEA-5)	
(S335: AEP, UK, RU/S336: AEP, UK/ S535D/S735D: AEP, UK, RU)			

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remark
△ 220 M001	A-6062-397-A 1-541-632-11	OPTICAL PICK-UP KHM-220AAA/J1RP MOTOR, DC (LOADING)	
ACCESSORIES & PACKING MATERIALS *****			
	1-418-988-21	COMMANDER, STANDARD (RMT-D115P) (S335: AEP, UK, RU/S336: AEP, UK)	
	1-418-988-31	COMMANDER, STANDARD (RMT-D115E) (S335: E, EA/S336: AUS/S345)	
	1-418-989-31	COMMANDER, STANDARD (RMT-D120P) (S735D: AEP, UK, RU, E)	
	1-418-989-41	COMMANDER, STANDARD (RMT-D1200) (S735D: E, AUS)	
	1-418-989-51	COMMANDER, STANDARD (RMT-D120E) (S735D: EA)	
	1-418-991-21	COMMANDER, STANDARD (RMT-D116P) (S535D)	
△	1-569-008-21	ADAPTOR, CONVERSION 2P (S335: E)	
	1-575-334-11	CORD, CONNECTION (STEREO AV CABLE 1.5m) (S335/S336/S345/S535D)	
	1-575-334-41	CORD, CONNECTION (STEREO AV CABLE 1.5m) (S735D)	
	1-575-335-21	CORD, CONNECTION (S-VIDEO CABLE 1.5m) (S535D)	
△	1-770-019-11	ADAPTOR, CONVERSION PLUG 3P (S335: UK/S336: UK/S535D: UK/S735D: UK)	
	1-776-078-31	CORD, CONNECTION (S-VIDEO CABLE 1.5m) (S735D)	
	3-053-633-01	COVER, BATTERY (for RMT-D115E/D115P/D116P) (S335/S336/S345/S535D)	
	3-055-539-01	COVER, BATTERY (for RMT-D120E/D1200/D120P) (S735D)	
	3-059-581-11	MANUAL, INSTRUCTION (ENGLISH) (S335: AEP, UK, RU)	
	3-059-581-71	MANUAL, INSTRUCTION (RUSSIAN) (S335: RU)	
	3-060-986-11	MANUAL, INSTRUCTION (ENGLISH) (S335: AEP, UK, RU/S336: AEP, UK)	
	3-060-986-21	MANUAL, INSTRUCTION (FRENCH, GERMAN) (S335: AEP/S336: AEP06)	
	3-060-986-31	MANUAL, INSTRUCTION (ITALIAN, DUTCH) (S335: AEP/S336: AEP06)	
	3-060-986-41	MANUAL, INSTRUCTION (SPANISH, PORTUGUESE) (S335: AEP51/S336: AEP08)	
	3-060-986-51	MANUAL, INSTRUCTION (DANISH, FINISH) (S335: AEP51/S336: AEP08)	
	3-060-986-61	MANUAL, INSTRUCTION (SWEDISH, NORWEGIAN) (S335: AEP51/S336: AEP08)	
	3-060-986-71	MANUAL, INSTRUCTION (RUSSIAN) (S335: RU)	
	3-060-987-11	MANUAL, INSTRUCTION (ENGLISH) (S335: E, EA/S336: AUS/S345)	
	3-060-987-41	MANUAL, INSTRUCTION (FRENCH) (S345)	
	3-060-987-61	MANUAL, INSTRUCTION (ARABIC) (S335: E, EA)	
	3-061-301-41	MANUAL, INSTRUCTION (ENGLISH) (S535D)	
	3-061-301-51	MANUAL, INSTRUCTION (FRENCH, GERMAN) (S535D: AEP53)	

Ref. No.	Part No.	Description	Remark
	3-061-301-61	MANUAL, INSTRUCTION (ITALIAN, DUTCH) (S535D: AEP53)	
	3-061-301-71	MANUAL, INSTRUCTION (SPANISH, PORTUGUESE) (S535D: AEP52)	
	3-061-301-81	MANUAL, INSTRUCTION (DANISH, FINNISH) (S535D: AEP52)	
	3-061-301-91	MANUAL, INSTRUCTION (SWEDISH, NORWEGIAN) (S535D: AEP52)	
	3-061-775-31	MANUAL, INSTRUCTION (ENGLISH) (S735D: AEP, UK, RU)	
	3-061-775-41	MANUAL, INSTRUCTION (FRENCH, GERMAN) (S735D: AEP50)	
	3-061-775-51	MANUAL, INSTRUCTION (ITALIAN, DUTCH) (S735D: AEP50)	
	3-061-775-61	MANUAL, INSTRUCTION (SPANISH, PORTUGUESE) (S735D: AEP51)	
	3-061-775-71	MANUAL, INSTRUCTION (DANISH, FINNISH) (S735D: AEP51)	
	3-061-775-81	MANUAL, INSTRUCTION (SWEDISH, NORWEGIAN) (S735D: AEP51)	
	3-061-775-91	MANUAL, INSTRUCTION (RUSSIAN) (S735D: RU)	
	3-061-776-11	MANUAL, INSTRUCTION (ENGLISH) (S735D: E, EA, AUS)	
	3-061-776-51	MANUAL, INSTRUCTION (FRENCH) (S735D: E, EA)	

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

PRINTING THE SERVICE MANUAL

The PDF of this service manual is not designed to be printed from cover to cover. The pages vary in size, and must therefore be printed in sections based on page dimensions.

NON-SCHEMATIC PAGES

Data that does NOT INCLUDE schematic diagrams are formatted to 8.5 x 11 inches and can be printed on standard letter-size and/or A4-sized paper.

SCHEMATIC DIAGRAMS

The schematic diagram pages are provided in two ways, full size and tiled. The full-sized schematic diagrams are formatted on paper sizes between 8.5" x 11" and 18" x 30" depending upon each individual diagram size. Those diagrams that are LARGER than 11" x 17" in full-size mode have been tiled for your convenience and can be printed on standard 11" x 17" (tabloid-size) paper, and reassembled.

TO PRINT FULL SIZE SCHEMATIC DIAGRAMS

If you have access to a large paper plotter or printer capable of outputting the full-sized diagrams, output as follows:

- 1) Note the page size(s) of the schematics you want to output as indicated in the middle window at the bottom of the viewing screen.
- 2) Go to the File menu and select Print Set-up. Choose the printer name and driver for your large format printer. Confirm that the printer settings are set to output the indicated page size or larger.
- 3) Close the Print Set Up screen and return to the File menu. Select "Print..." Input the page number of the schematic(s) you want to print in the print range window. Choose OK.

TO PRINT TILED VERSION OF SCHEMATICS

Schematic pages that are larger than 11" x 17" full-size are provided in a 11" x 17" printable tiled format near the end of the document. These can be printed to tabloid-sized paper and assembled to full-size for easy viewing.

If you have access to a printer capable of outputting the tabloid size (11" x 17") paper, then output the tiled version of the diagram as follows:

- 1) Note the page number(s) of the schematics you want to output as indicated in the middle window at the bottom of the viewing screen.
- 2) Go to the File menu and select Print Set-up. Choose the printer name and driver for your printer. Confirm that the plotter settings are set to output 11" x 17", or tabloid size paper in landscape () mode.
- 3) Close the Print Set Up screen and return to the File menu. Select "Print..." Input the page number of the schematic(s) you want to print in the print range window. Choose OK.

TO PRINT SPECIFIC SECTIONS OF A SCHEMATIC

To print just a particular section of a PDF, rather than a full page, access the Graphics Select tool in the Acrobat Reader tool bar.

- 1) To view the Graphics Select Tool, press and HOLD the mouse button over the Text Select Tool which looks like: . This tool will expand to reveal additional tools. Choose the Graphics Select tool by placing the cursor over the button on the far right that looks like: .
- 2) After selecting the Graphics Select Tool, place your cursor in the document window and the cursor will change to a plus (+) symbol. Click and drag the cursor over the area you want to print. When you release the mouse button, a marquee (or dotted lined box) will be displayed outlining the area you selected.
- 3) With the marquee in place, go to the file menu and select the "Print..." option. When the print window appears, choose the option under the section called "Print Range" which says "Selected Graphic".

Select OK and the output will print only the area that you outlined with the marquee. 

(continued >)